
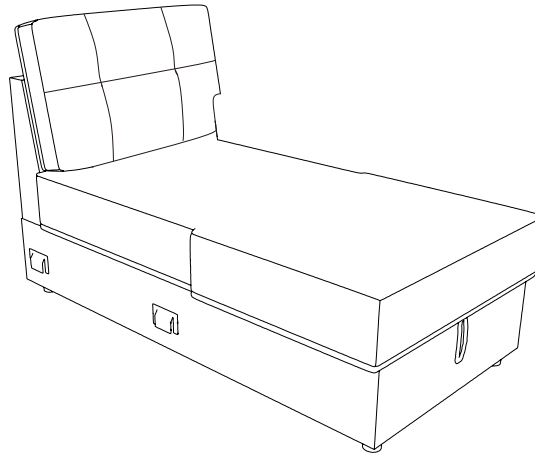




ASSEMBLY INSTRUCTION

ITEM NO: .D79403.404.405-CH-A




PARTS LIST

 A	 B	 C 2pcs for LS	 H
x1	x1	x3	x1


HARDWARE LIST

							
1	x8	5	x2				

1. Please open the seat frame before removing the parts for assembly.

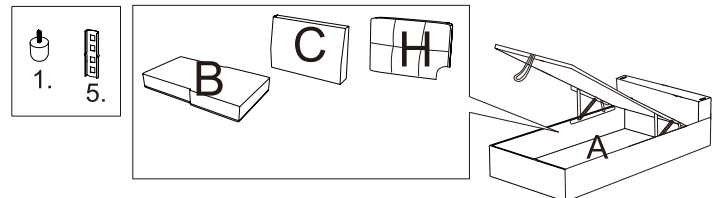


2. After removing the cushion from the compress bag, please allow air to flow through the cushion for few days. You can try to fluff cushion by push in and push out on all four sides of the cushion. Hitting the top/front of the cushion with your hand to

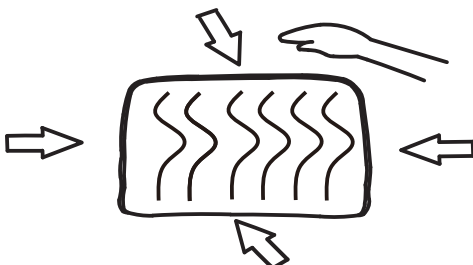


3. Please allow at least 72 hours for the cushions to recover to its natural state after removing from the package.


Step1

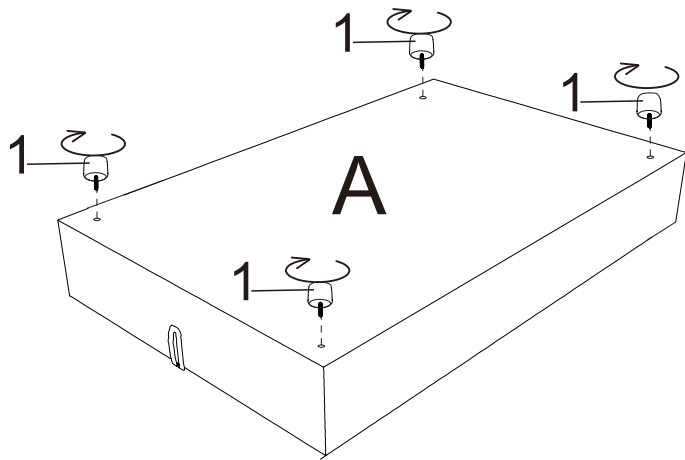


Step2

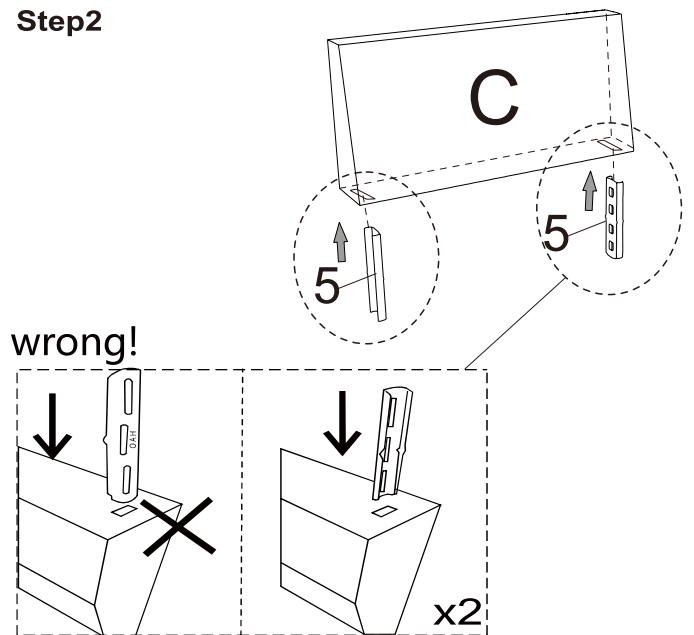

Step3

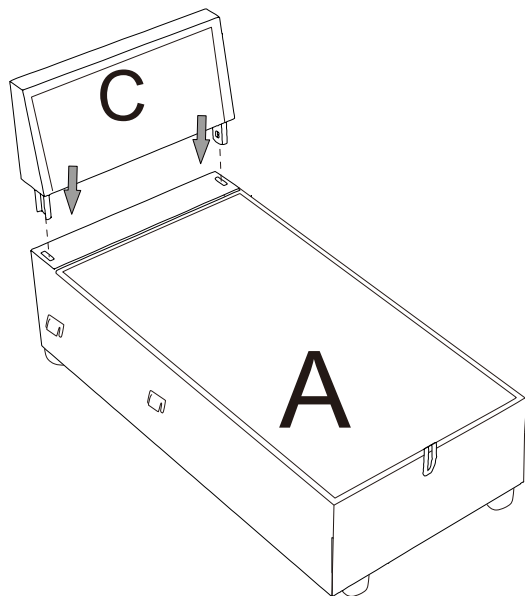

Step4

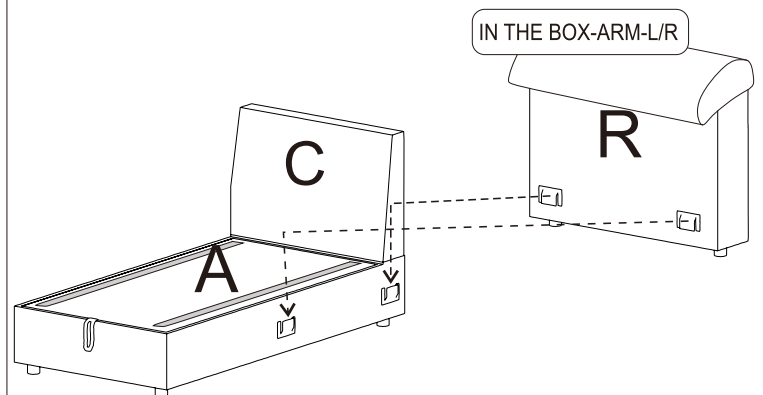

Step5

