




## 32" BUILT-IN GRILL

MODEL: BI32

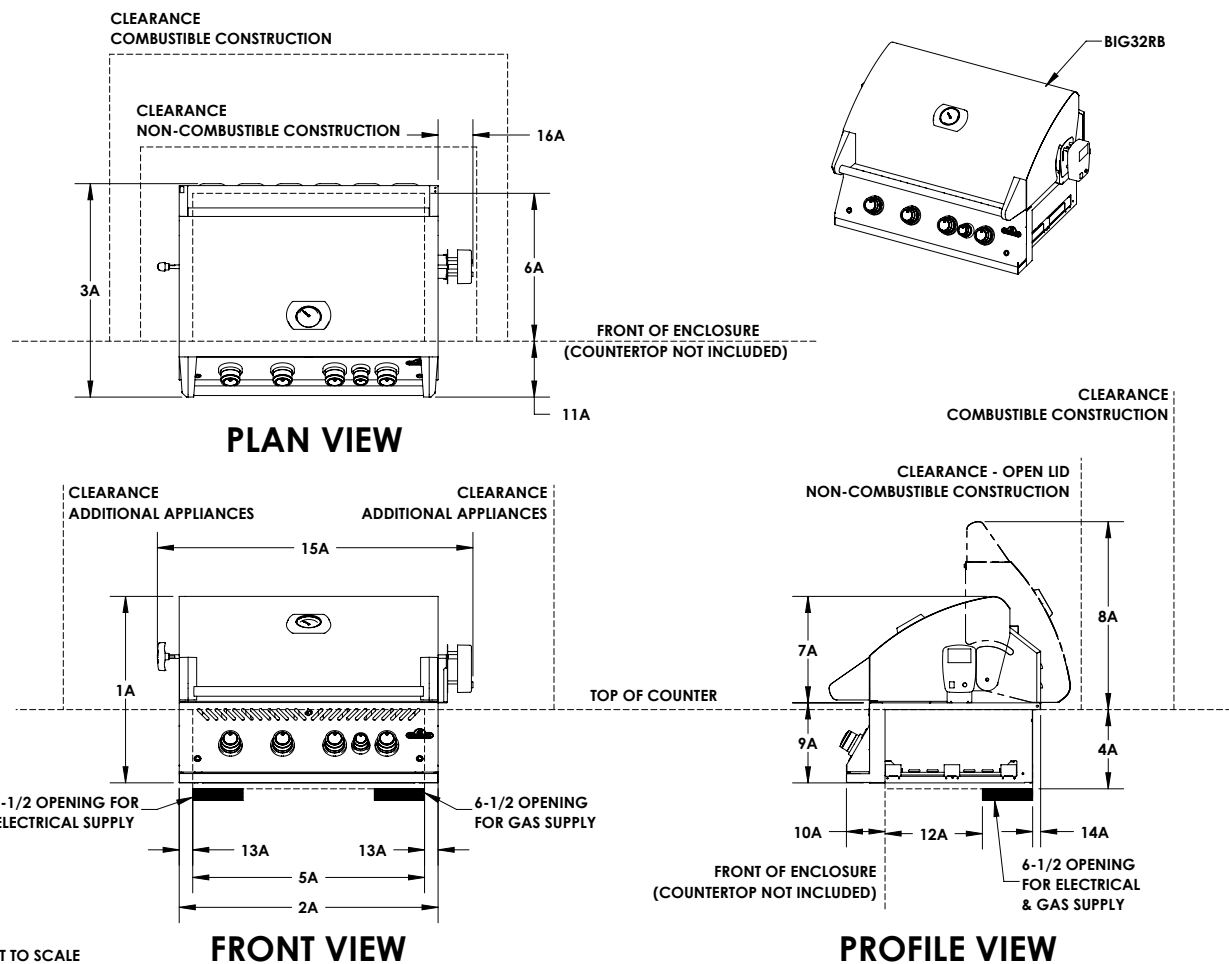

## DIMENSIONS AND CLEARANCES

Refer to page 2 for unit with zero clearance liner

DIMENSIONS	IN	MM
1A Overall height of appliance	24 1/8	613
2A Overall width of appliance	33 1/2	851
3A Overall depth of appliance	27 5/8	702
4A Cut-out height for appliance (min)	10 1/4	260
5A Cut-out width for appliance (min-max)	30 - 32	762 - 813
6A Cut-out depth for appliance (min-max)	19 3/8 - 19 3/4	492 - 502
7A Height from top of base to top of appliance	13 3/4	349
8A Height from top of counter to top of open appliance	24 5/16	618
9A Height from top of base to bottom of appliance	10 3/8	264
10A Depth of control panel to front of enclosure	5	127
11A Depth from front of appliance to front of enclosure	7 1/4	184
12A Distance from front of enclosure to front side of openings for utilities	12 5/8	321
13A Side flange width / distance to supply openings	1 7/8	48
14A Rear flange depth / distance to supply openings	1 3/4	44
15A Overall width of rotisserie kit installed	40 13/16	1037
16A Distance from appliance to rotisserie motor	4 1/2	114


MINIMUM CLEARANCES	IN	MM
Clearance to combustible construction – back*	17	584
Clearance to combustible construction – side*	9	356
Clearance to non-combustible construction – back*	5	127
Clearance to non-combustible construction – side*	5	254
Distance between additional appliances*	15	381

NOTE: \* CLEARANCES ARE MEASURED FROM APPLIANCE, NOT ACCESSORIES.  
REFERENCE OWNER'S MANUAL FOR INSTALLATION INSTRUCTIONS AND DEFINITIONS



## 32" BUILT-IN GRILL WITH OPTIONAL ZERO CLEARANCE LINER

MODEL: BI32 WITH BI-3623-ZCL

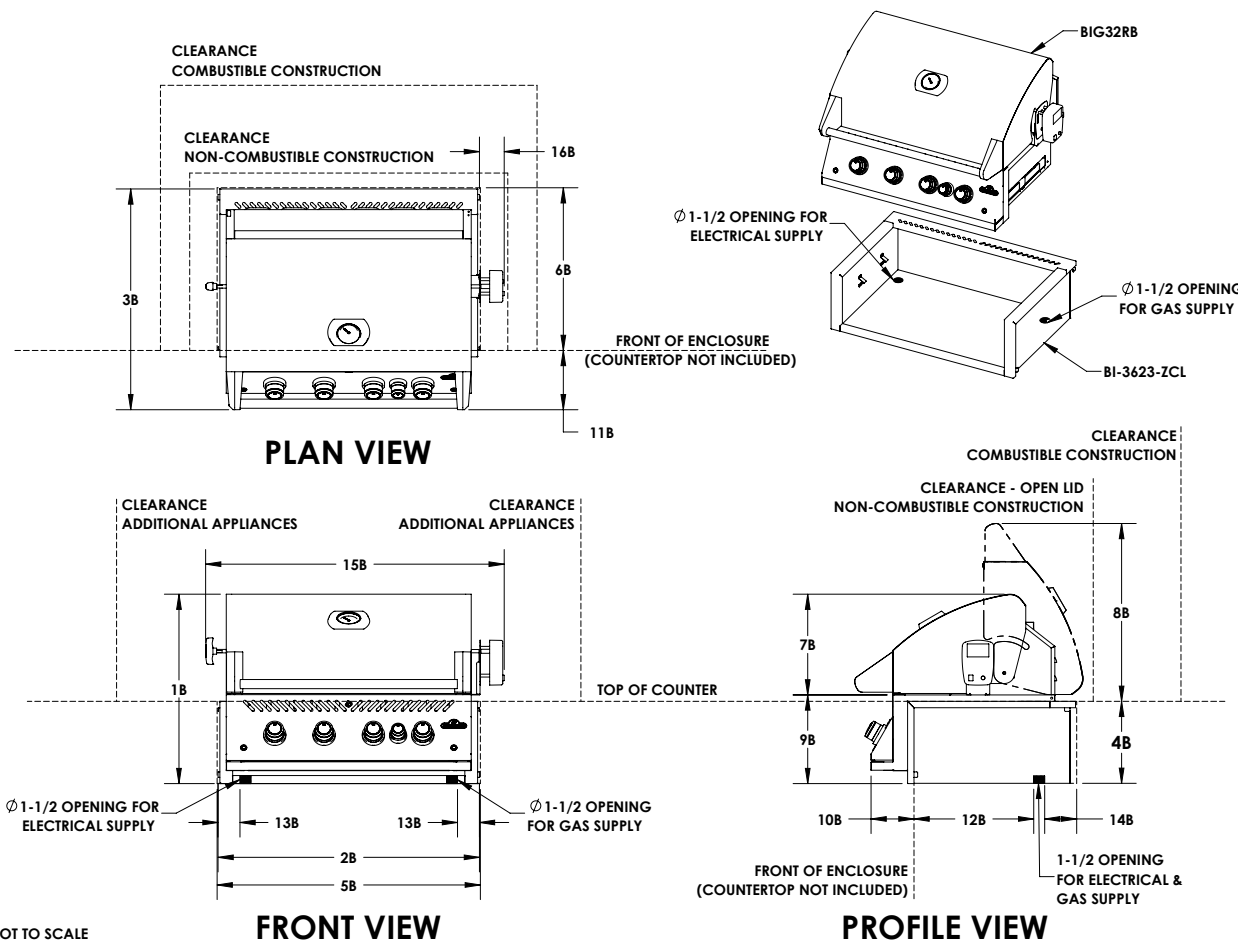

## DIMENSIONS AND CLEARANCES

Refer to page 1 for unit without zero clearance liner

DIMENSIONS	IN	MM
1B Overall height of appliance with liner	25 7/8	657
2B Overall width of appliance with liner	35 1/4	895
3B Overall depth of appliance with liner	30 3/16	767
4B Cut-out height for liner	10 3/8	264
5B Cut-out width for liner	34	864
6B Cut-out depth for liner	21 3/8	543
7B Height from top of base to top of appliance	13 3/4	349
8B Height from top of counter to top of open appliance	25 3/16	640
9B Height from top of base to bottom of liner	12 1/8	308
10B Depth of control panel to front of enclosure	5 7/8	149
11B Depth from front of appliance to front of enclosure	8 1/8	206
12B Distance from front of enclosure to front side of openings for utilities	16 3/8	416
13B Side distance from cut-out to side of openings for utilities	2 1/8	54
14B Rear distance from cut-out to side of openings for utilities	3 1/2	89
15B Overall width of appliance with liner and rotisserie kit	40 13/16	1037
16B Distance from liner to rotisserie motor	3 3/8	86

MINIMUM CLEARANCES	IN	MM
Clearance to combustible construction – back*	17	432
Clearance to combustible construction – side*	9	229
Clearance to non-combustible construction – back*	5	127
Clearance to non-combustible construction – side*	5	127
Distance to additional appliances*	15	381

NOTE: \* CLEARANCES ARE MEASURED FROM APPLIANCE, NOT ACCESSORIES.  
REFERENCE OWNER'S MANUAL FOR INSTALLATION INSTRUCTIONS AND DEFINITIONS