




FEATURES

- Deep, Ergonomic Bathing Well
- Extended Skirt for Above-Floor Plumbing
- Stepped Integral 3T Flange
- Pre-Leveled Support Base
- Slip Resistant Floor
- Premium Cast Acrylic Surface
- Limited Lifetime Warranty
- Made in USA

AVAILABLE SYSTEMS

DRIFTBATH ONLY

- Up to 70 water portals
- Quiet, energy-efficient .75 hp pump with integrated heat-transfer
- Electronic control
- 4 high-intensity LED Chromatherapy
- Available in White or Biscuit
- Dozens of low-profile, water only portals for a one of a kind hydrotherapy experience

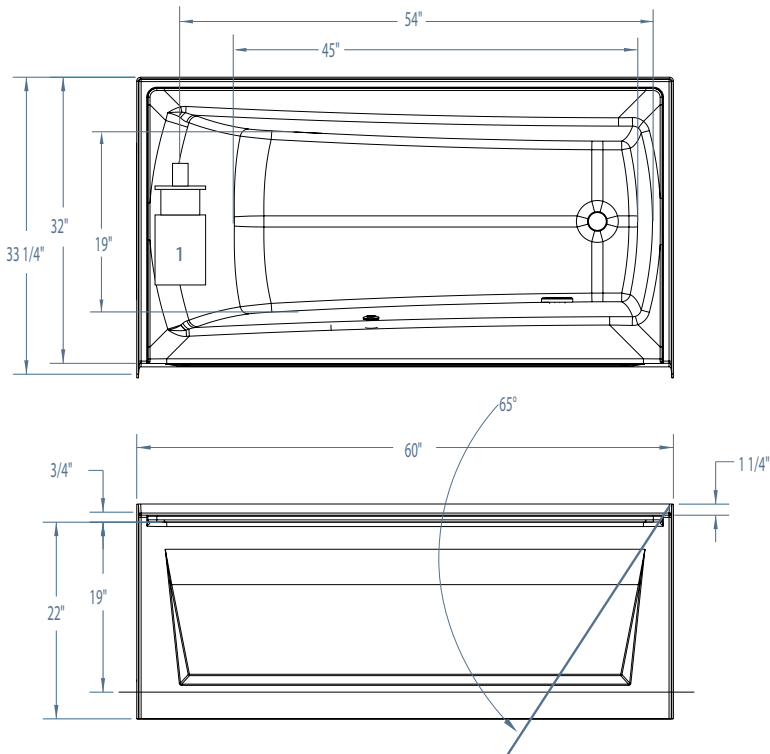

PARKER 21 6032S
60" x 32" x 22 3/4"

FEATURES Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type & Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt.
DriftBath #6032PDBSR/L	Cast Acrylic	Water Circulation	Pump	Integrated	Electronic	LH or RH	154 lbs

DIMENSIONS

Width	Depth	Height	Skirt Height
60"	33 1/4" - 32"	24 1/4" - 22 3/4"	22"

SUMP DATA

Capacity to Overflow	Min. Operating Capacity	Top	Bottom	Top	Bottom
55 gal	30 gal	54"	45"	22"	19"

WIDTH @ centerline DEPTH @ centerline

PLUMBING DIMENSIONS

A	B	Drain to Overflow	Skirt Height
1 1/2"	8 1/2"	14"	2" - 3 1/4"

ELECTRICAL DATA

Component	Specification	Requirement
Pump (DriftBath)	3/4 HP; 8.8 AMP; 120V	20 AMP; 120V, separate circuit; Class A GFCI

Notes:
16 x 16 minimum access required at pump/blower location(s).