
Hardware Installation Manual

Any question please contact us

yoursupport@163.com

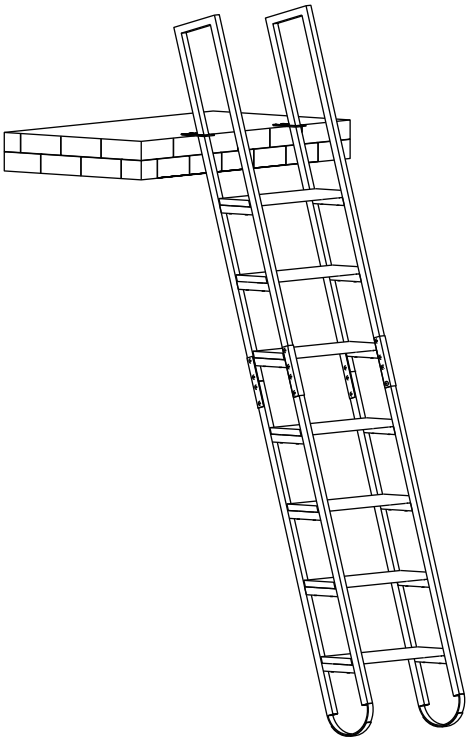


Notice Please retain these instructions for future reference

·Firmly secure all bolts, screws and knobs before use.
·Reconfirm that all bolts, screws and knobs are secure every 90 days.
·Fasten screws loosely during initial assembly. Do not firmly tighten the screws until the item is completely assembled.
·Do not use or store this item in the proximity of open flame or combustible chemicals.
·Be aware that some parts are heavy and have sharp edges.
·Do not use this item in a way inconsistent with the manufacturer's instructions as this could void the product warranty.
·If any parts are missing, broken, damaged, or worn, please contact us for assistance.


Pre-installation

TOOLS REQUIRED

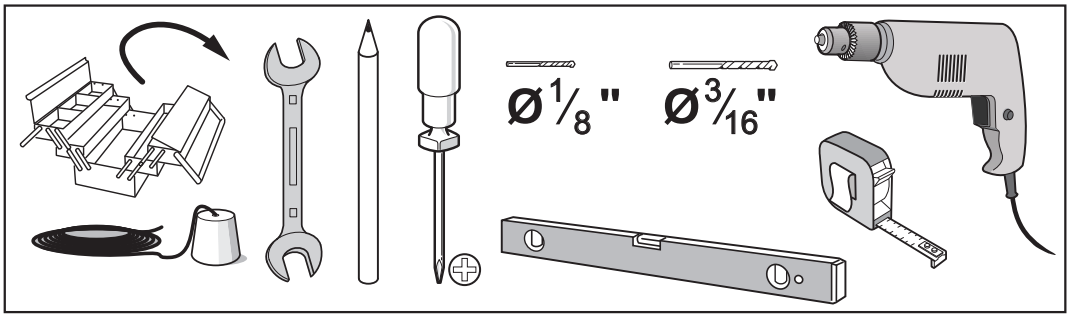


PARTS INCLUDED


A
Upper Frame



B
Lower Frame




C Treads




D
Frame Connector





E Fixed Plate








F Anti-slip strips



HARDWARE INCLUDED

1  M8*25mm	2  M8*18mm	3  M6*40mm
4  Ø4*38mm	5  Ø6*35mm	6  4mm/5mm

Parts list

Option Size	112¼" (2850mm)	124¼" (3155mm)	136³⁄₁₆" (3460mm)	148¼" (3765mm)
A 	2	2	2	2
B 	2	2	2	2
C 	7	8	9	10
D 	4	4	4	4
E 	2	2	2	2
F 	2	2	2	2
1 	16	16	16	16
2 	16	16	16	16
3 	28	32	36	40
4 	8	8	8	8
5 	8	8	8	8
6  5mm	2	2	2	2
4mm	1	1	1	1

For product assistance and warranty information, please contact us before returning this product.

Customer Service: yoursupport@163.com


Please provide us with following information, so that it will be easier to resolve your problem smoothly.

1. Order ID:

2. Pictures of Your Items Damage or Parts Missing:

3. Pictures of all the labels on the package.


Installation suggestions

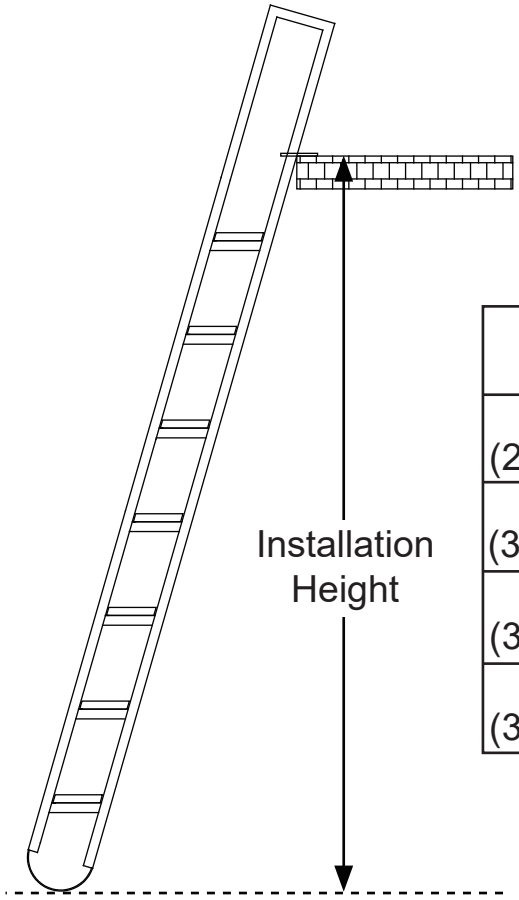

Option Size	Installation Height
112¼" (2850mm)	86⅝" ~ 96" (2200~2440)mm
124¼" (3155mm)	98⅞" ~ 108" (2500~2740)mm
136⅜" (3460mm)	110¼" ~ 120" (2800~3050)mm
148¼" (3765mm)	122¼" ~ 132" (3105~3350)mm


Step-1 Assemble Frame

Notice: Please place a protective pad on the ground before installation to avoid scratching the ladder's metal parts.

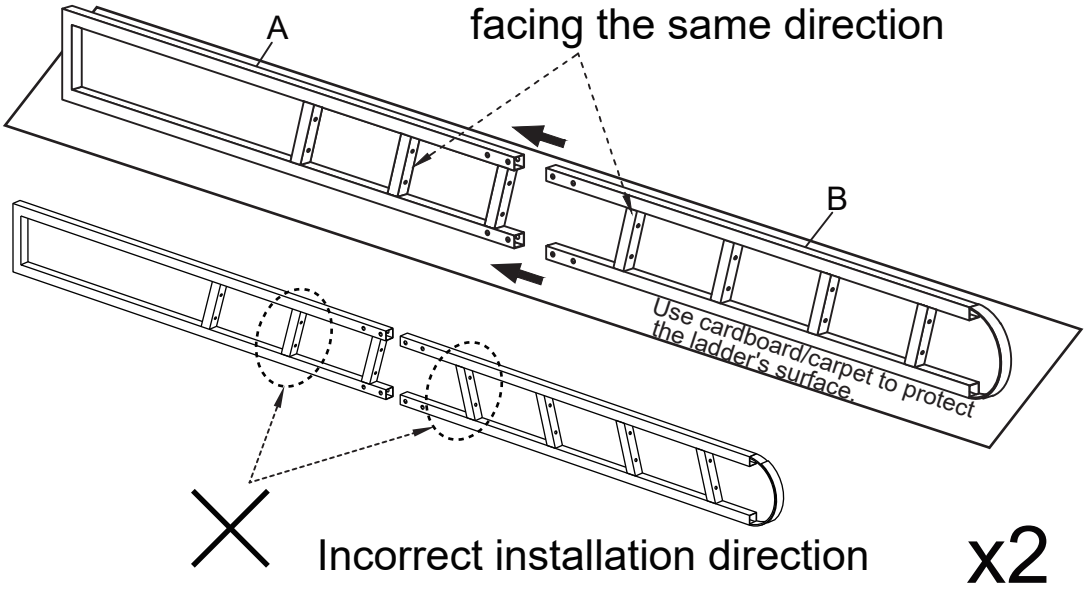


Step-2


Installing the Connector I

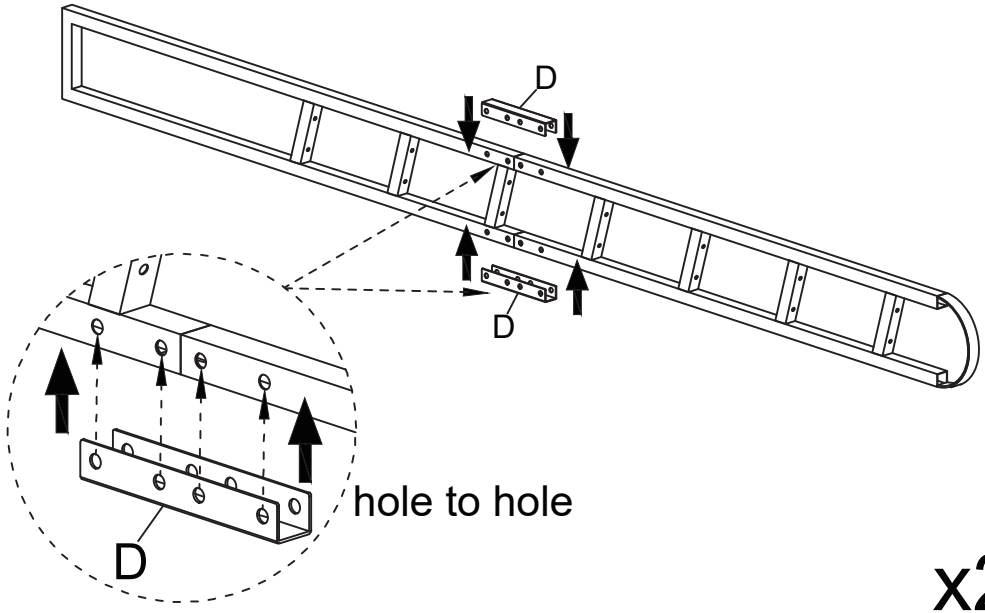

Step-3


Installing the Connector II and anti-slip strips

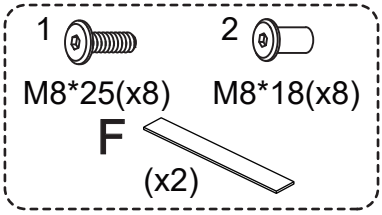


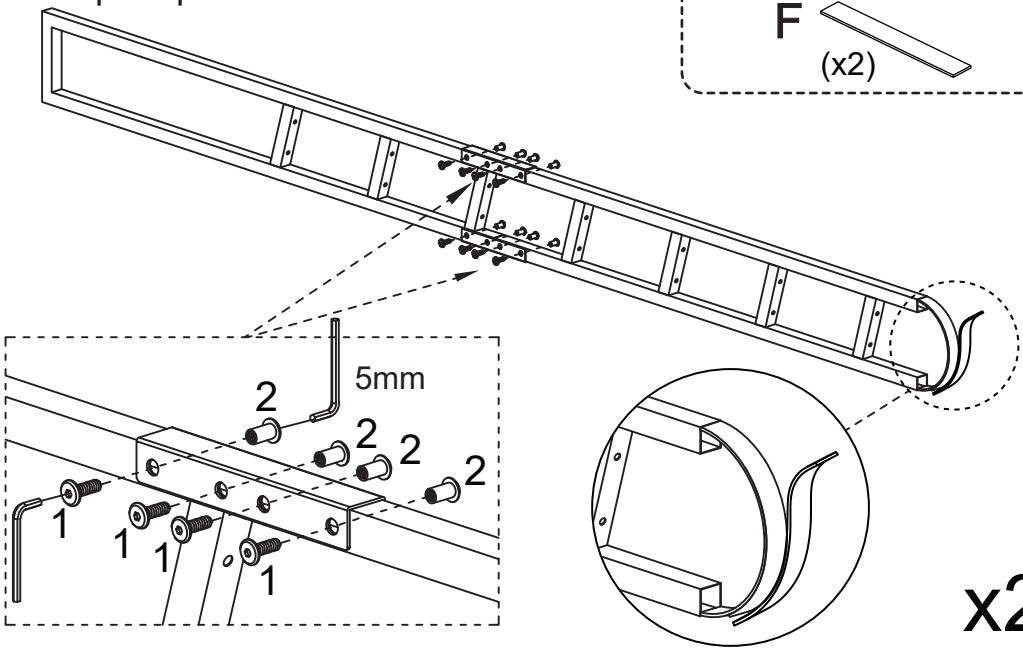


Step-4

Installing the Treads



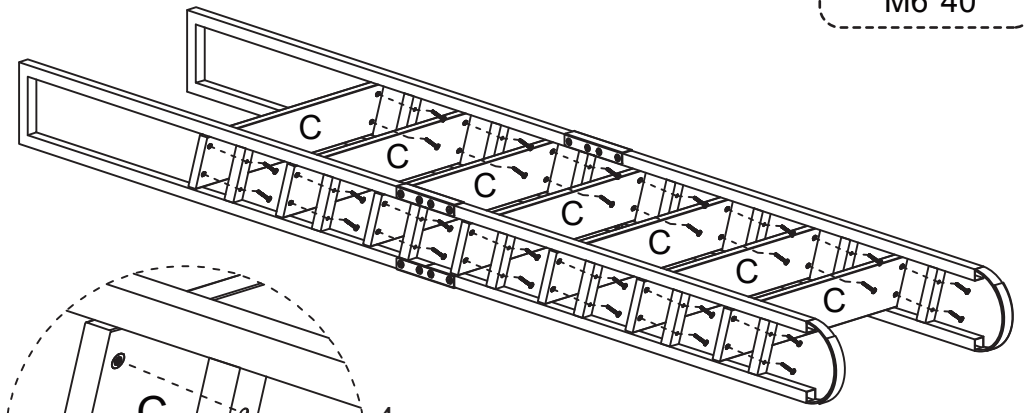


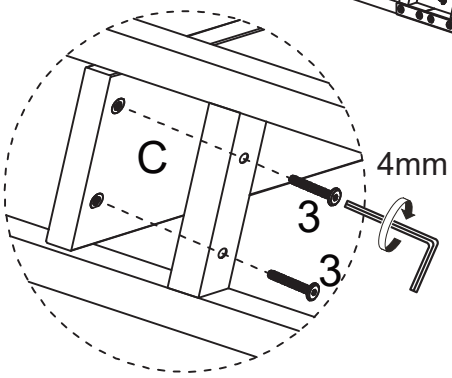



Notice: Do not fully tighten the screws until all treads are installed to prevent misalignment of the screw holes.

Step-5

Installing the Fixed Metal Plate

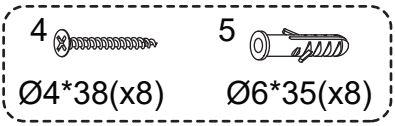

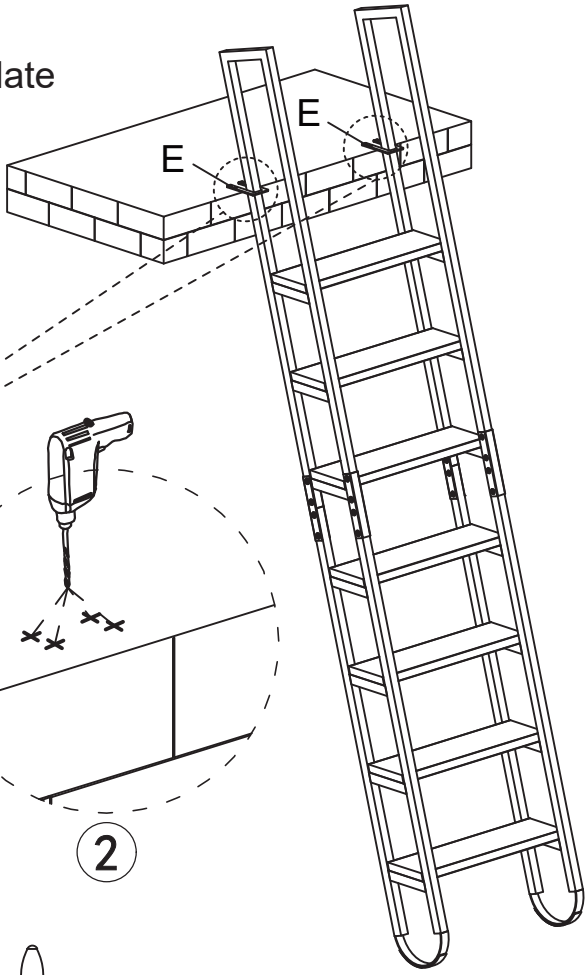


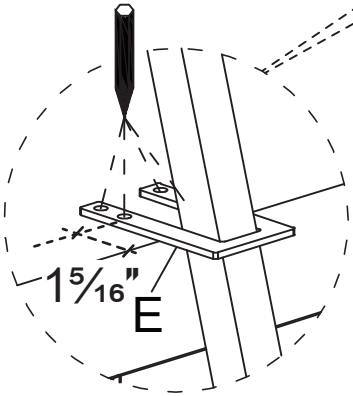


1

2

Distance from the edge to the first screw hole: 1 5/16" (33mm) .

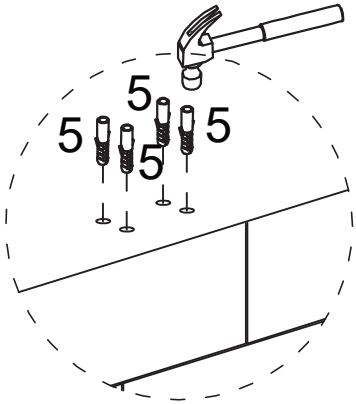

3

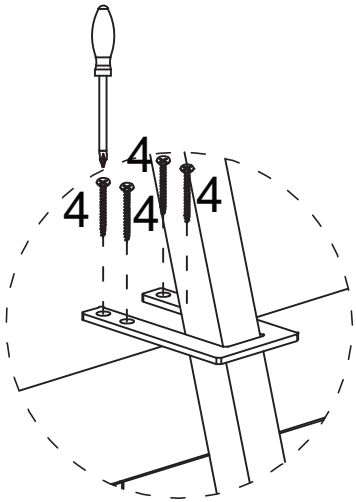

4