

Commercial Sink Instruction Manual

Product ID. QND4Z



Scan for Support
support@garvee.com




GARVEE.com

Commercial Sink Instruction Manual

28*20*34inch

Product Components


Nut 4PCS	Long rod screw 4pcs	Gasket 4PCS	Pool body 1PC	Short legs 4pcs
				
Long Sink leg 4pcs	Pool chassis 1PC	Faucet sleeve box 1set	Wrench 1PC	Black gravity ball, in the faucet sleeve box 1PC
				
White transparent washer, in the faucet sleeve box 1PC	Yellow metal washer, in faucet sleeve box 1PC	Water outlet, in the drain pipe set	Drainage pipe set 1set	Drain pipe, in the drain pipe set 1pc
				

<p>Black plastic washer, in the drain pipe set 1pc</p> 	<p>Yellow metal nut, in the drain pipe set 1pc</p> 	<p>Black deodorant washer, in the drain pipe set</p> 	<p>Metal washer, in the drain pipe set</p> 
---	---	---	--

Installation Steps


Step 1: Mounting sink chassis

Fix the chassis to the height required by the legs, insert the long rod screws into the guard, align them with the holes, place the small gasket and nut at the bottom of the long screws, tighten the screws with the wrench in the accessory box, and fix each leg in turn.

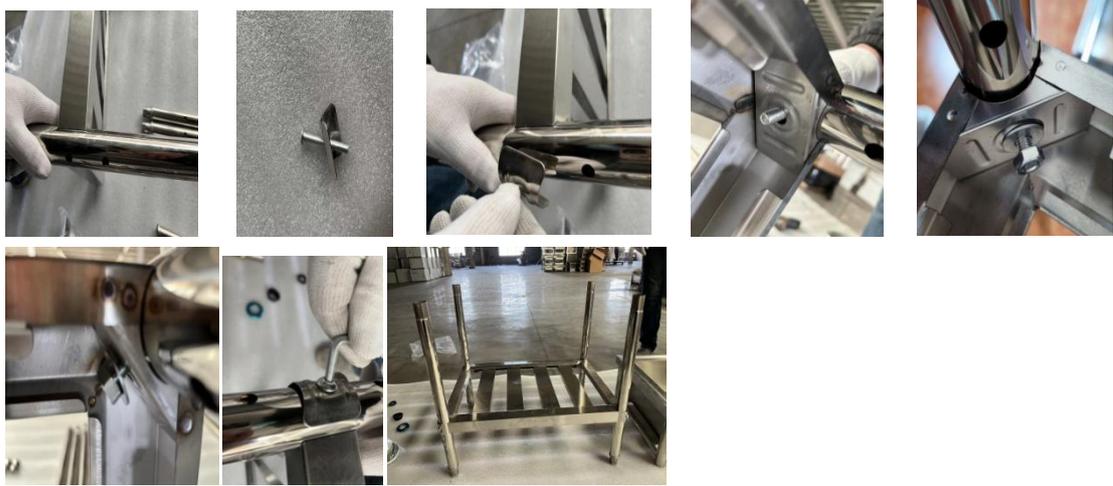


Step 2: Sink installation

Connect the short leg to the long leg hole of the chassis in turn, and then align the tank body with the short leg hole in turn.

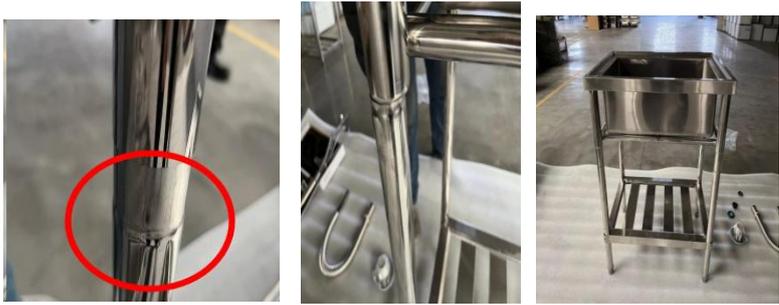


Step 3: Install drainage device.

Remove the plastic nut and black plastic rubber ring from the drainer, make sure that the white rubber ring is on the drainer, and put it into the water inlet slot. After inserting it, put the black rubber ring on the drainer, and then rotate and tighten the plastic nut.

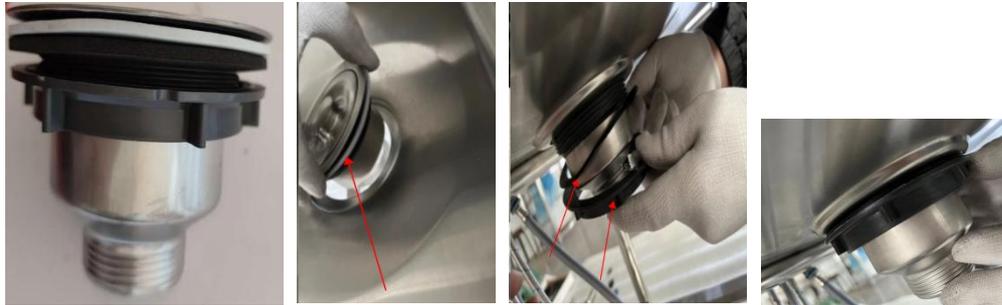

Step 4: Drain pipe installation

Place the black rubber ring in the drain pipe, thread the yellow fitting to the drain pipe, and then assemble the drain pipe to the drainer assembly and tighten. (Make sure that there is a black plastic washer in the drain pipe) See if you need to install an anti-odor gasket, tear off the film on the blue decorative sheet, plug it in from the bottom of the drain, and then install the black anti-odor gasket to the bottom of the drain, and adjust the position as needed.

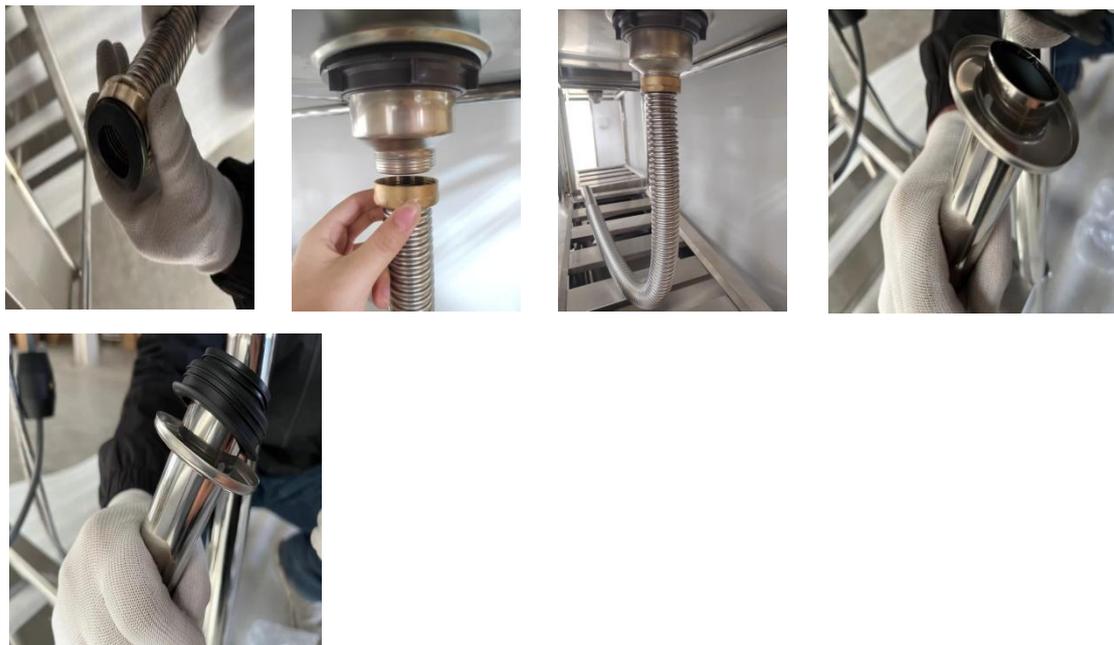


Step 5: Install faucet fittings

Push in the metal fittings that come with the faucet in the following order to tighten, then thread the white plastic washer from the bottom to the top of the faucet (be sure to check that the white washer is properly installed to prevent water leakage).



Step 6: Install faucet

First insert the gray wire of the faucet into the top hole of the sink, and then insert the hot and cold water inlet pipe into the top hole of the sink in turn, and then insert the metal semicircle washer from the bottom to tighten it, and twist the screw of the gravity ball into two halves with a wrench and set it on the gray line (when setting, you need to pull the gray line faucet to set the gravity ball on that) and then tighten the screw.

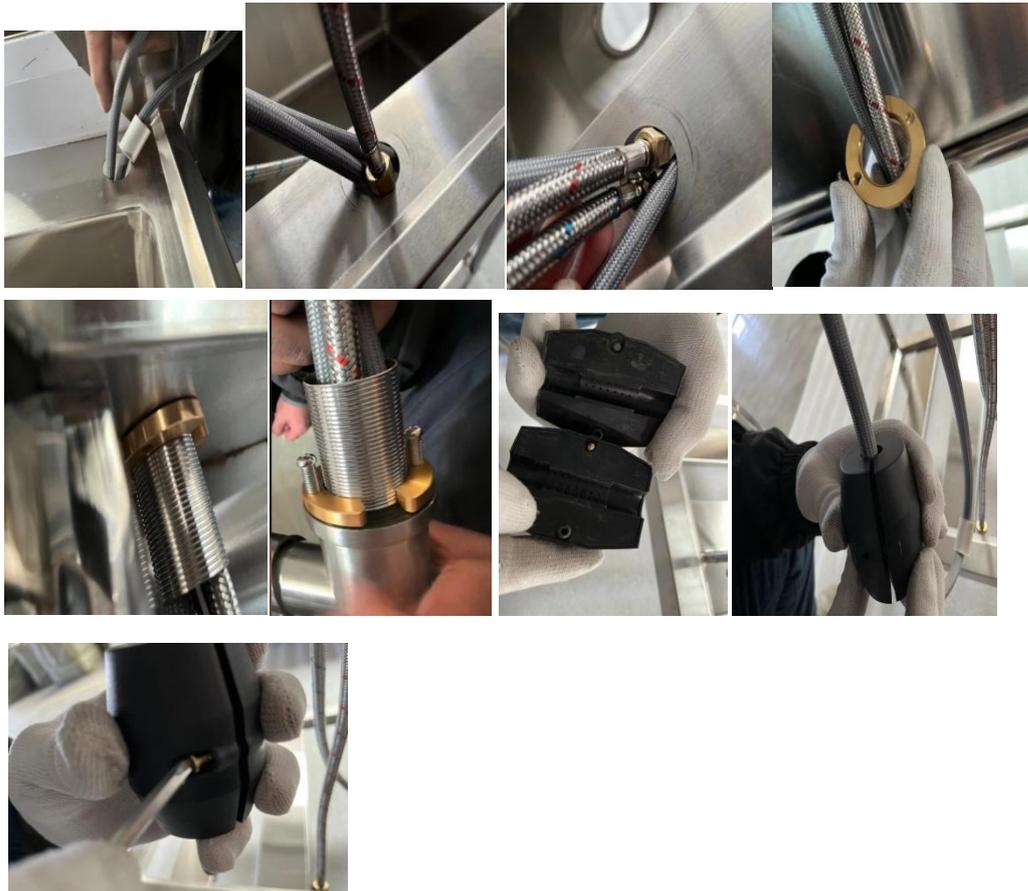

Step 7: Sink installation completed



Thank you for choosing our company's products, please read this instruction manual carefully