



Revel®

Frameless Pivot Shower Door

K-707546-D3

Features

- Frameless, 5/16-inch-thick Frosted tempered glass.
- Self-closing mechanism offers superior feel and security against water leakage.
- Vertical handle complements the contemporary style.
- Ultra-low threshold creates easy entry and exit to the showering space.
- CleanCoat® glass treatment repels water for improved ease of cleaning.
- Out-of-plumb adjustability for simpler installation.
- Can be installed to open to the left or right.
- Maximum width adjustability.

Installation

- Pivot shower door.

Components

Additional included component/s: Hardware Kit.



Codes/Standards

ANSI Z97.1

CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



| | |
|-----|------------------------|
| SHP | Bright Polished Silver |
|-----|------------------------|



| | |
|-----|----------------------|
| ABZ | Anodized Dark Bronze |
|-----|----------------------|





| | |
|-----|-------------------------|
| BNK | Anodized Brushed Nickel |
|-----|-------------------------|

Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

| | |
|----|---------|
| D3 | Frosted |
|----|---------|

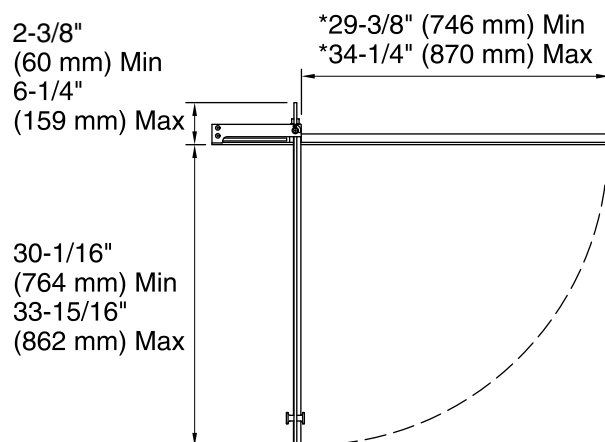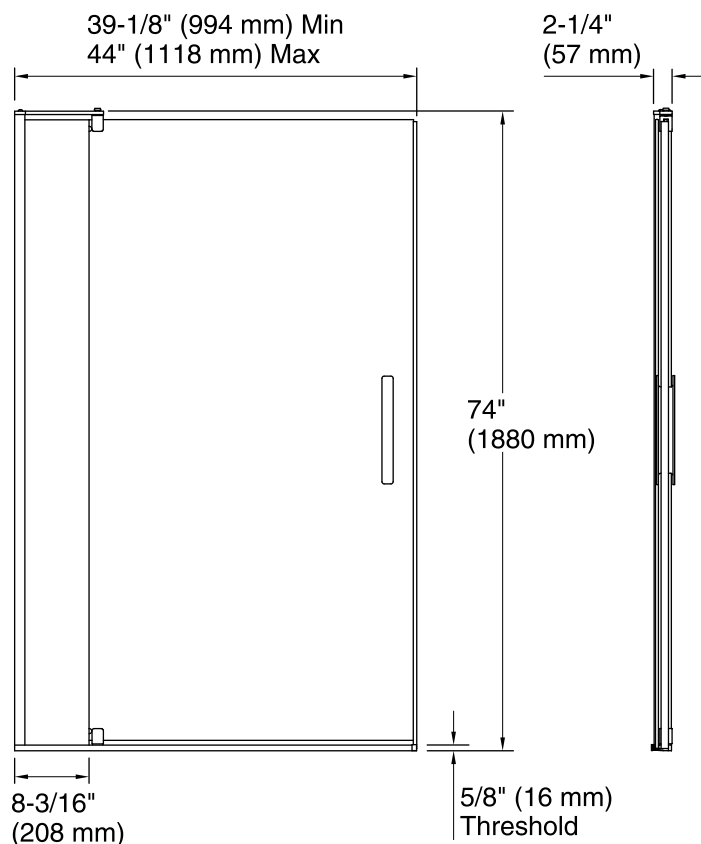

***Walk-through**

Technical Information

All product dimensions are nominal.

| | |
|----------------------|------------------------------|
| Installation type: | For shower base installation |
| Opening style: | Pivot |
| Opening Width - Min: | 39-1/8" (994 mm) |
| Opening Width - Max: | 44" (1118 mm) |
| Walk-through - Min: | 29-3/8" (746 mm) |
| Walk-through - Max: | 34-1/4" (870 mm) |
| Glass thickness: | 5/16" (8 mm) |
| Glass coating: | CleanCoat® |

Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 78" (2032 mm) to allow clearance for installation.