



## Product Overview

# WellPlus™ Salt Free Water Softener & Filtration System

Designed for homes over 2500 square feet

The AQUIOS® WP236 is a point of entry system (full house) designed for well water systems. This system will prevent and remove lime scale accumulation on pipes, fixtures and appliances, minimize iron stain and remove sediment, sand, dirt and other particulate from the water. Our systems do not demineralize your water and do not introduce salt or potassium chloride into your water. Instead, we utilize a food grade, natural polyphosphate that inhibits hard water minerals from creating scale, removes existing scale and also provides an anticorrosive protective layer.

Our high pressure housing utilizes our 5 micron, 20" high flow, pleated coconut carbon block filter which includes a proprietary scale prevention media designed to prevent and reduce harmful scale build up on heating elements, pipes, faucets and other plumbing fixtures and appliances. Our drop-in cartridge provides exceptional odor removal and the unique pleated design provides high dirt load capacity with high flow rates.

This wall mounted unit is designed to be installed at the water main entry point and will provide a flow rate of up to 15 gallons per minute (GPM). The standard inlet and outlet connections are 1-1/2" NPT and has a design pressure of 105 PSI (5.9 bar) with a maximum operating temperature of 113°F (45°C).

The proprietary scale prevention media is designed for extreme water conditions and designed to last 6 months.

## Features

- Designed for well water applications
- 1-1/2" NPT inlet & outlet
- Unique, in-head design Includes built in pressure-relief, bypass and shut off valves in the head assembly. Includes O-ring for pressurized seal.
- Knife-edge seal at both ends for a positive seal eliminating by-pass
- 5 micron pleated coconut carbon filter that reduces odor & taste
- Scale prevention media that prevents and removes harmful scale


## Specifications

- Dimensions: 9" x 26"
- Operating Temp: 40°F-113°F
- Max Pressure: 100 PSI
- Max Hardness: 25 GPG
- Flow Rate: 15 GPM
- Filter Type: Pleated carbon
- Filter Rating: 5 micron
- Filter Life: 3-6 months

## Product Specifications

Model No	Description	Dimensions	Fitting	Box Size	Weight
WP236	WellPlus™ Jumbo Salt Free System	26.85" x 9"	1-1/2" NPT	27" x 14" x 9"	15 Lbs
Replacement Filter	Description	Dimensions	Type	Flow Rate	
RCFS236W	Replacement cartridge WP236 System	4.50" x 20"	Pleated carbon	15 GPM	

## Filter Performance Curve

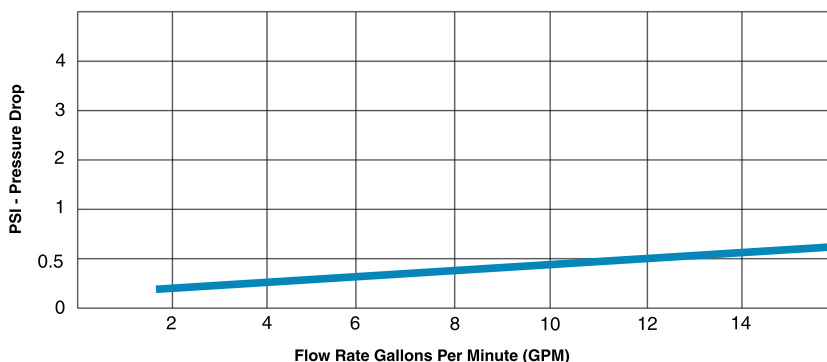

## Removal Efficiency in %

