


# FREESTANDING BATHTUB SERIES



## OWNER'S MANUAL & INSTALLATION GUIDE

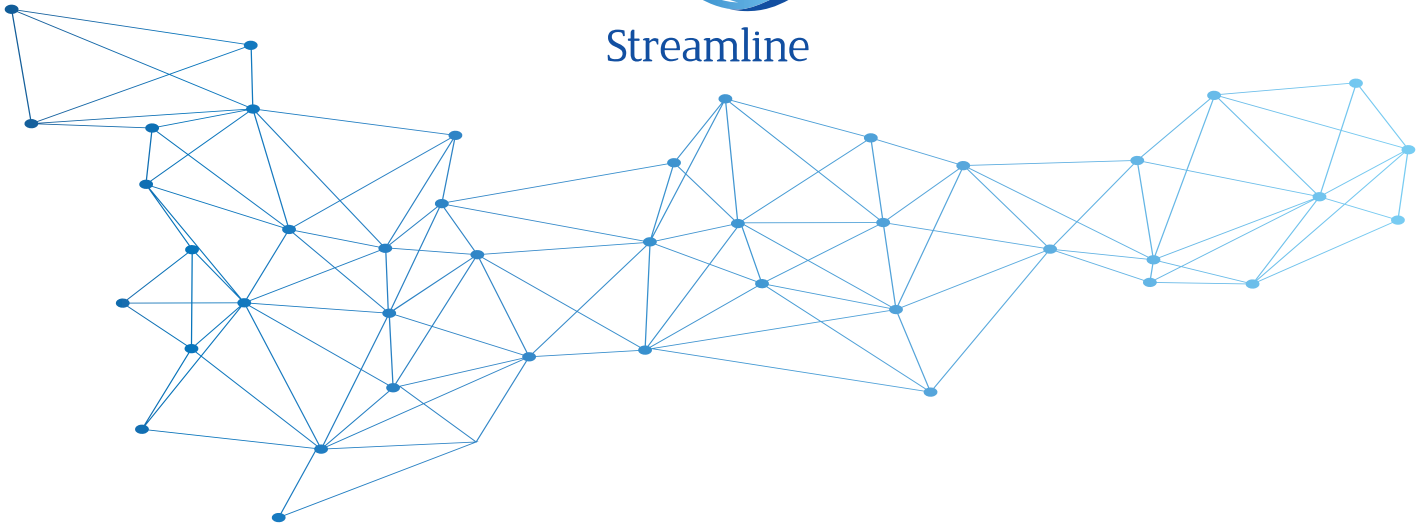

READ ENTIRE INSTALLATION GUIDE  
PRIOR TO INSTALLING THE BATHTUB  
THIS BATHTUB SHOULD ONLY BE  
INSTALLED BY A CERTIFIED PLUMBER

**CAUTION!**



TWO PEOPLE ARE REQUIRED  
TO LIFT THE BATHTUB

**QUESTIONS ON PRODUCT, INSTALLATION, RETURNS? PLEASE CONTACT**

[streamlinebath.com](http://streamlinebath.com)

[support@streamlinebath.com](mailto:support@streamlinebath.com)

1 (310)-935-0028

## PRIOR TO INSTALLING

These products must be installed by a fully insured and licensed plumber only.

Installation of any product by anyone other than fully insured and licensed plumber shall void limited warranty.

We are not responsible for any local code compliance for this product.

Building and plumbing codes may vary state-to-state.

Streamline shall not be held liable for any and all incidental damages or flood caused due to use of this product.

Streamline shall not be held liable for any and all fees stemming from cost of installation, re-installation, removal, subsequent damage, or transportation in a case of a product defect.

## TOOLS REQUIRED




Silicone



Pencil



Adjustable Key



Level Bar




Measuring Tape




Safety Glasses

## WHAT'S IN THE BOX

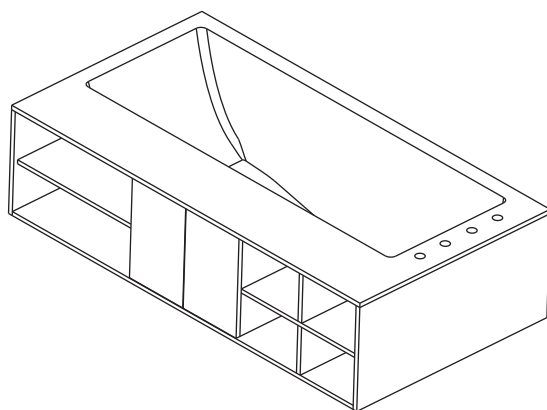


Bathtub




Flexible Hose  
(pre-installed)

DIAGRAM

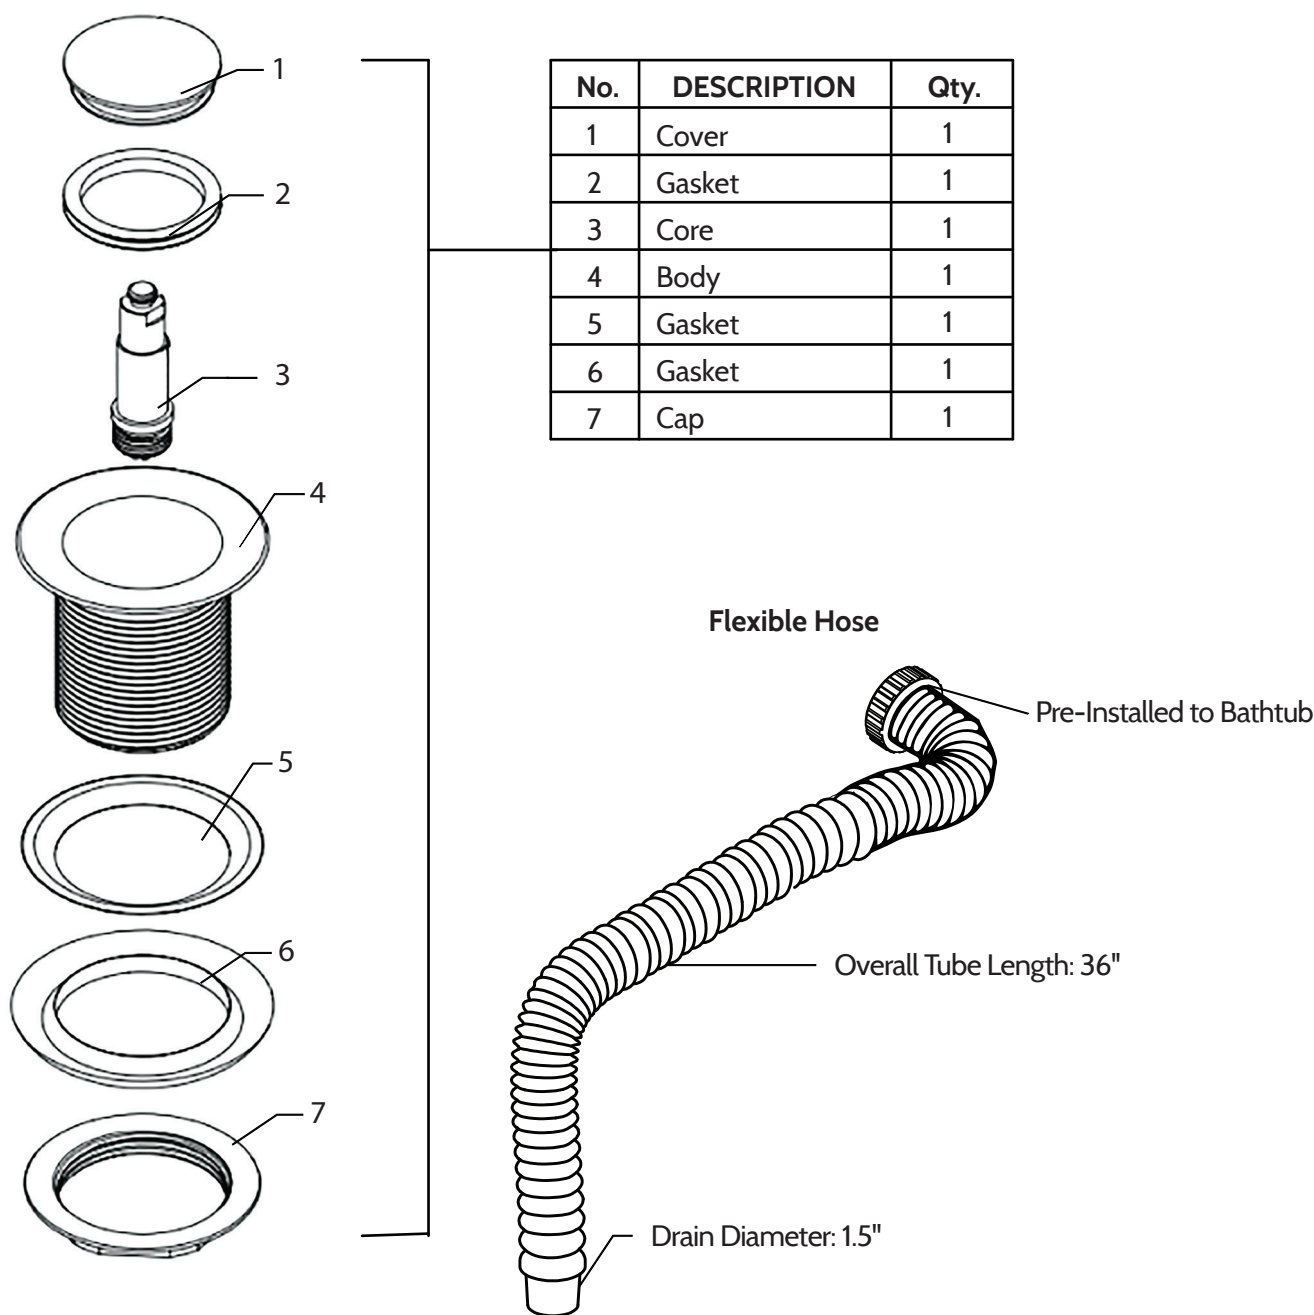


# BATHTUB INSTALLATION


1. Ensure that the floor at the installation site has sufficient floor support and is level.

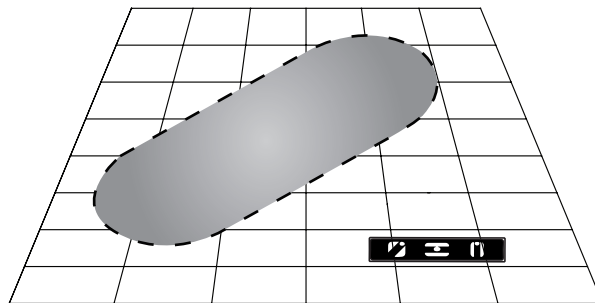


2. Waterproofing the floor is highly recommended.

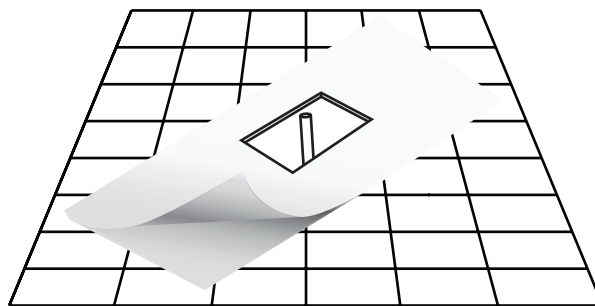


3. Determine the location of the drainpipe on the floor by taking measurements of the drain and waste location underneath the unit. Clean the drain hole area in preparation of setting the drain. The area should be dry & free from any debris.

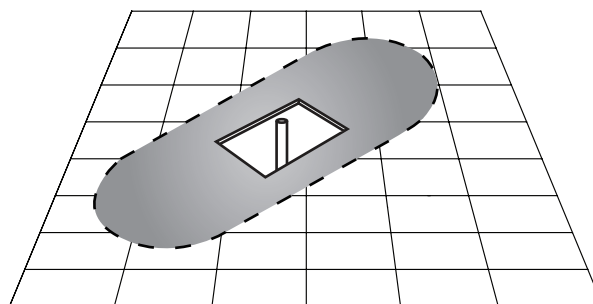


4. Remove the bathtub from its box. It is recommended that the bathtub is carried by a minimum of two people. Ensure to carry and set down the bathtub only in the upside-down position.

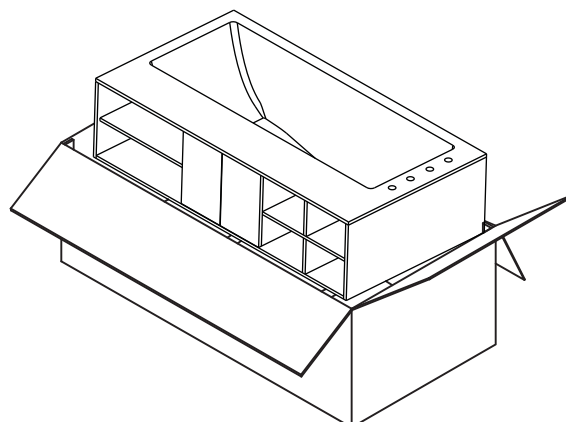


5. Lift and separate the resin bathtub from the panel frame.

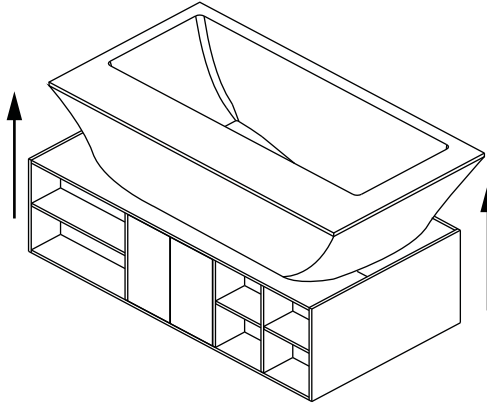


6. Drill faucet holes and assemble the faucet according to the manufacturer's instructions.

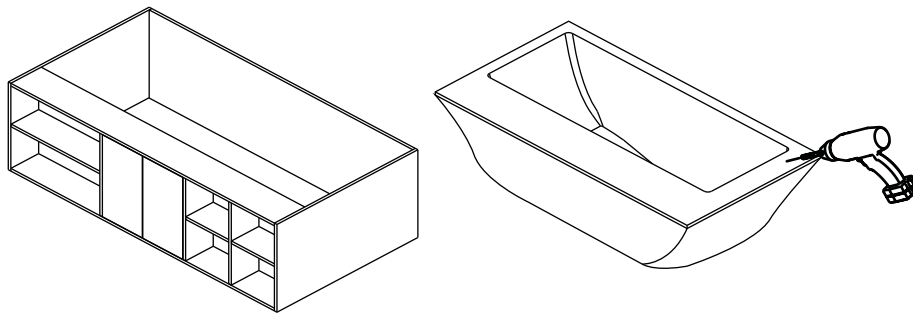


7. Move the panel frame to desired installation location.

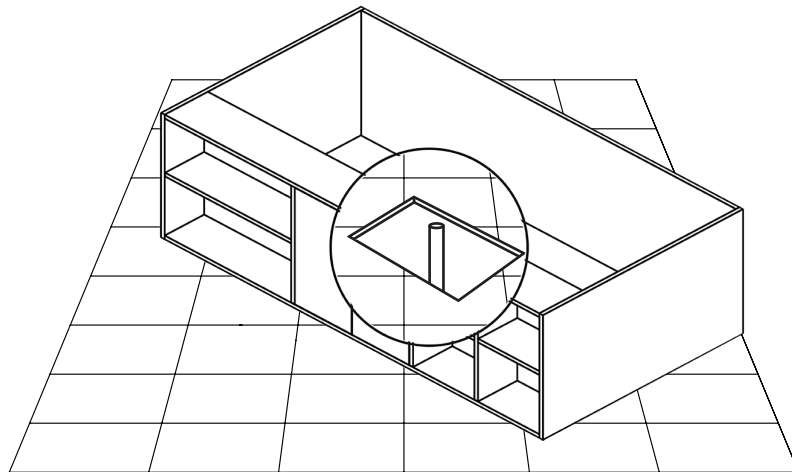


8. Proceed to place the provided flexible drain hose into the floor drain.

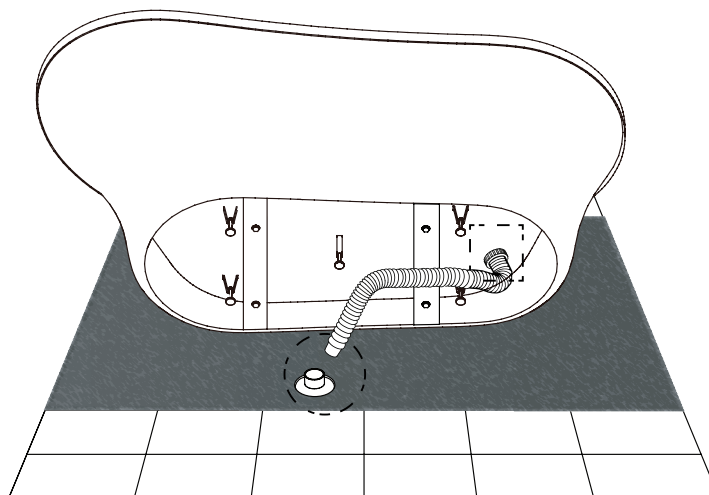

9. Please note, the flexible hose is a basic way that we provide to connect to the end plumbing in a home. The plumbing installation in every home differs, so please consult with a certified plumber to see if the plumbing in your home is compatible with using a basic flexible hose.
10. Seal the connection by using a PVC pipe sealant to join the parts together.

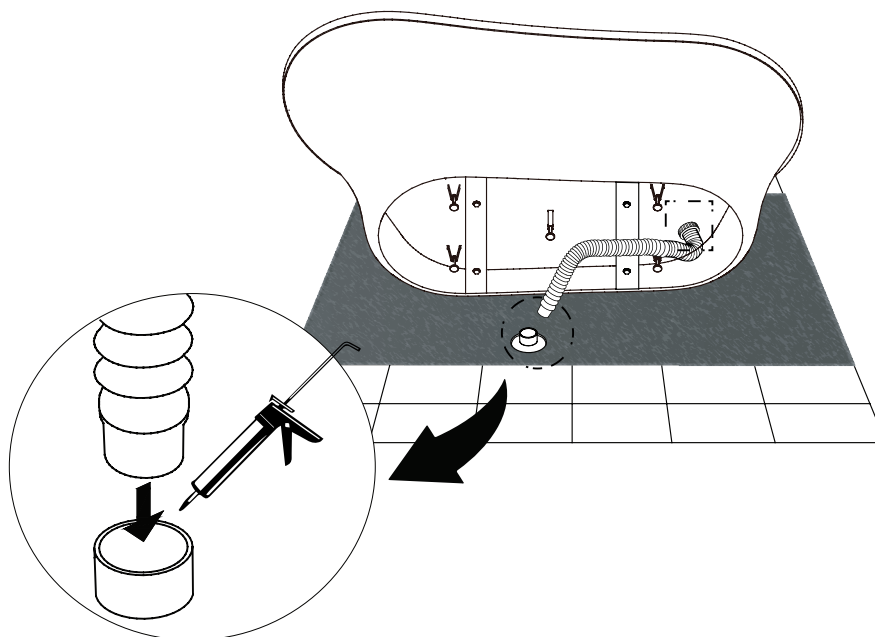

11. Lift and put the resin bathtub back into the panel frame, ensuring that the bathtub is level with the panel.

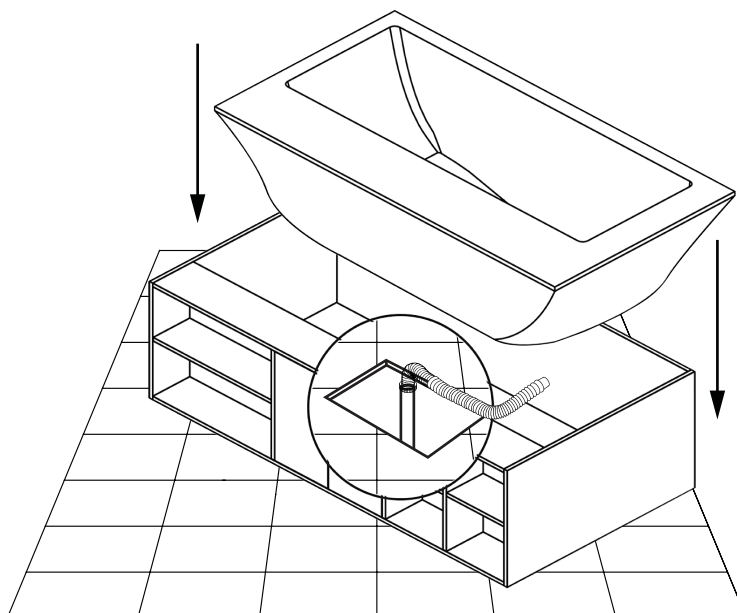

12. If you are placing your bathtub against the wall, apply silicone sealant along the edges.

