Features
- Multifunction showerhead and handshower each have advanced spray engines to provide three experiences: full coverage, pulsating massage, and silk spray
- Full coverage spray produces an encompassing spray ideal for everyday use
- Pulsating massage spray targets sore muscles to ease away aches and pains
- Silk spray releases a dense, luxurious spray ideal for rinsing
- Thumb tab allows for a smooth transition between sprays
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) flow rate.
- Coordinates with Purist®, Stillness®, and Composed® faucets and accessories
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

Material
- KOHLER finishes resist corrosion and tarnishing

Installation
- Shower arm and flange sold separately
- 1/2"-14 NPT connection.
- Wall-mount

Recommended Products/Accessories
K-7397 Shower Arm and Flange
K-7395 Shower Arm and Flange
K-933 Shower Arm and Flange

WaterSense
Meets EPA Criteria
Certified by
IAPMO R&T

Codes/Standards
ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
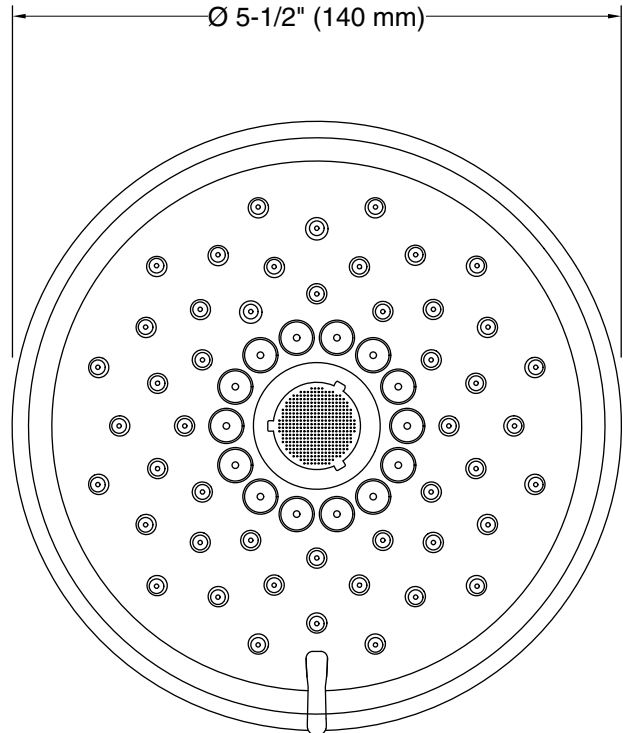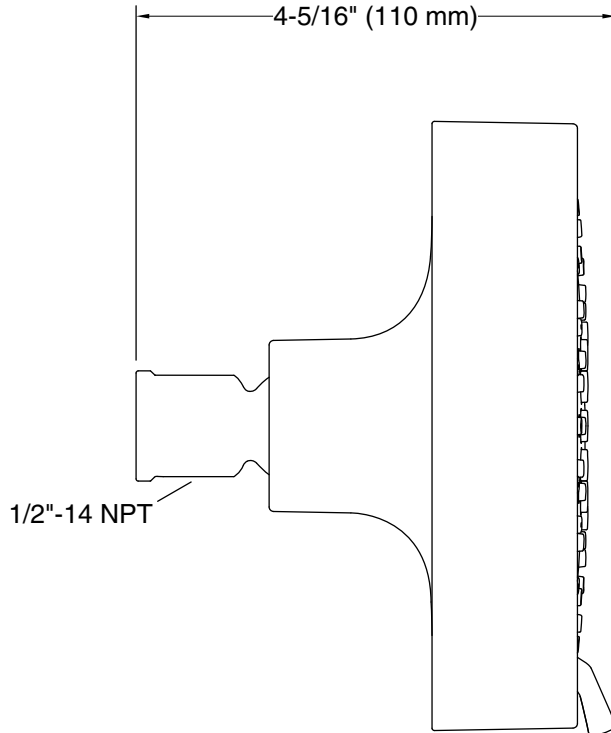California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	TT	Vibrant Titanium
	BGP	Brushed Graphite

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada
3-31-2025 21:07 - US/CA

THE BOLD LOOK OF KOHLER®

4-5/16" (110 mm)

Ø 5-1/2" (140 mm)

1/2"-14 NPT

Technical Information
All product dimensions are nominal.

Spout:

Handshower rated max flow:	1.75 gal/min (6.6 l/min)
Shower/Rainhead rated max flow:	1.75 gal/min (6.6 l/min)

Notes
Install this product according to the installation instructions.