


Submitted Model No.: _	
Specific Features:	



▲ Designate proper finish suffix

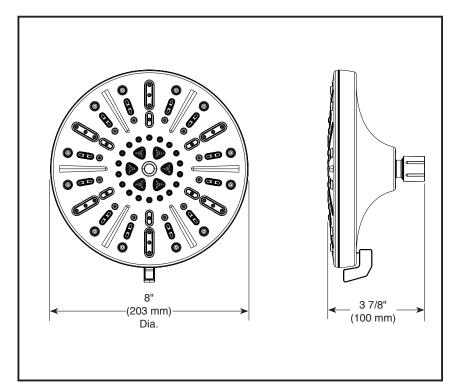

see what Delta can do

SHOWER HEAD

■ 4 Setting Shower Head

FEATURES:

■ Touch-Clean® Nozzles

STANDARD SPECIFICATIONS:

- Max. flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Max. flow rate 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (75444D)
- Shower head with four spray settings
- Change spray modes with easy turn lever, pause is a non-positive shut-off
- Ball connector swivel angle is 40° (20° per side)
- Fits standard 1/2"-14 NPT pipe fitting

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® applies to 75444 only