

# ASSEMBLY INSTRUCTIONS



## CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

## TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers


## HARDWARE INCLUDED




Fixture




Decorative Caps




Covers




Shade




Stems



Swivels




Ceiling Plate



Washers A




Washers B



Decorative Nuts



Ball Nut



Mounting Unit




Mounting Screws



Wire Nuts

\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


## EXPLODED PARTS

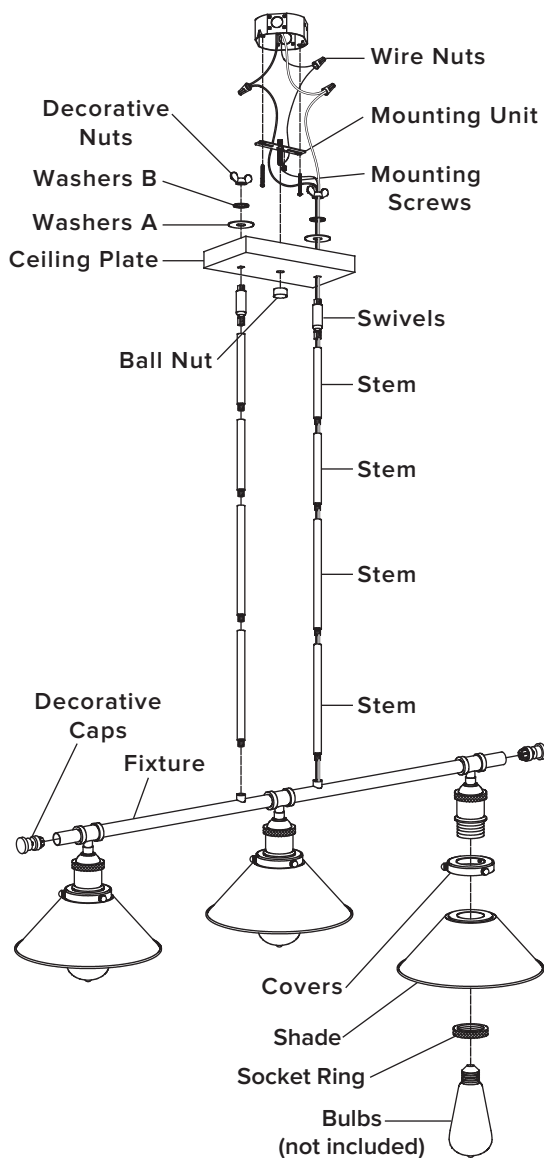

## INSTALLATION


### STEP 1

Unscrew the **ball nut** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box.

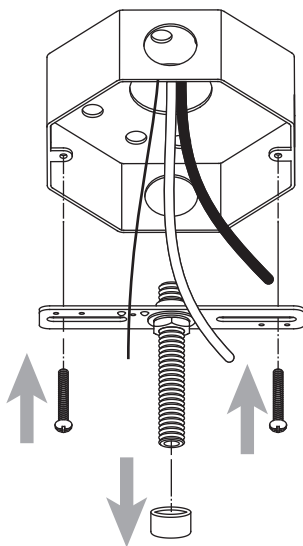




### STEP 2

Disassemble the **swivels** under the **Ceiling Plate** by unscrewing **decorative nuts**. Keep the **washers A** and **washers B** for later use.

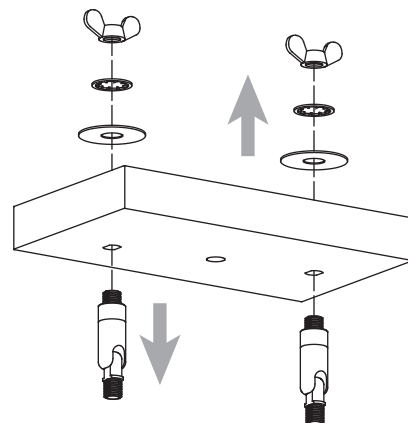

### STEP 3

Install **decorative caps** into the **fixture**.

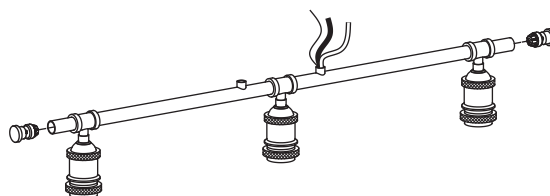


## ASSEMBLY INSTRUCTIONS (INSTALLATION)

### STEP 4

Weave the fixture wire and fixture ground wire through the **stems** and **swivels**.


Install **swivels** and **stems** into the **fixture**. Install stems based on the desired length of the item on the fixture.

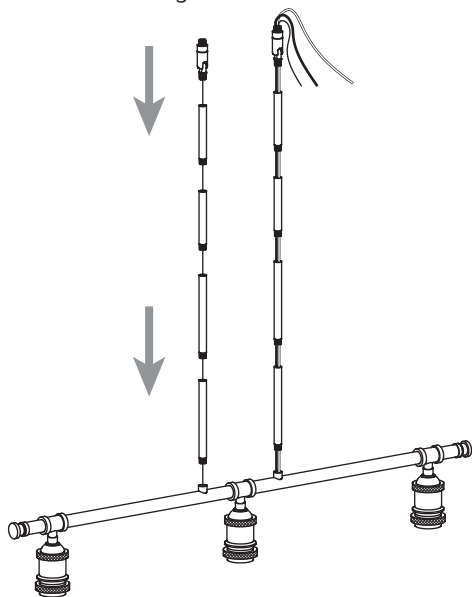

### STEP 5


Weave the fixture wire and fixture ground wire through the **ceiling plate**, **washers A**, **washers B** and **decorative nuts**.

Install **swivels** into the **ceiling plate**, and secure with **washers A**, **washer B** and **decorative nuts**.

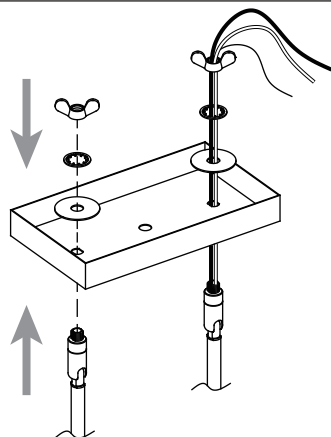

### STEP 7


Secure the **fixture** to the **mounting unit** with the **ball nut**.

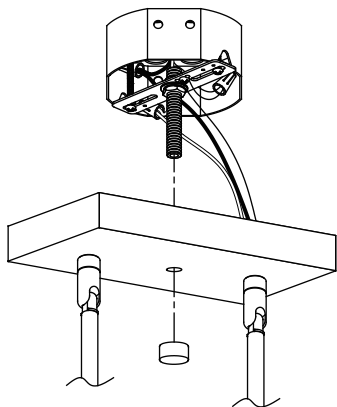

### STEP 8

Remove the **socket rings** from the socket.

Attach the **covers** and **shade** onto **fixture** using **socket rings**.

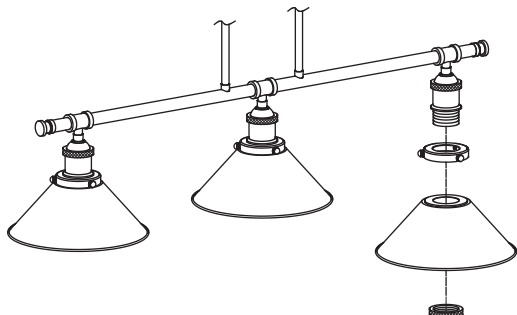

### STEP 6

Make the electrical connection from the junction box to the **fixture**.




Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

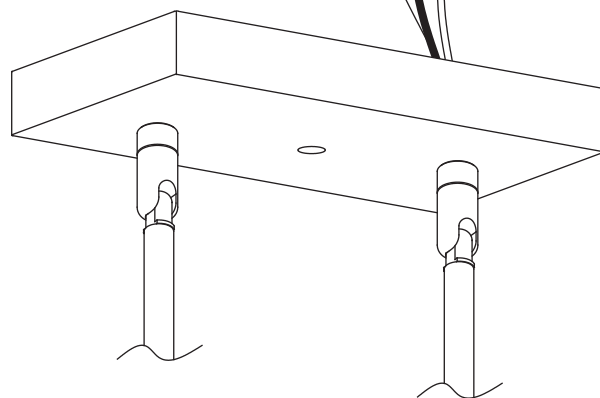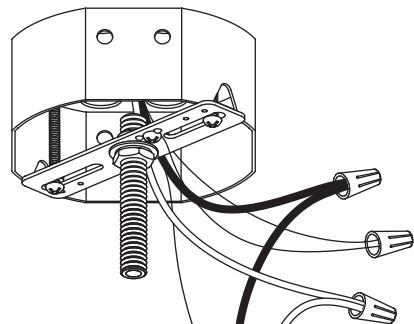

### STEP 9

Install bulb (not included)

