

HISENSE REFRIGERATOR

HRT180N6ABE

Standard Depth Top-Freezer Refrigerator



KEY FEATURES

- ENERGY STAR® Certified
- Ice Maker Ready
- Garage Ready
- Adjustable Glass Shelves
- Electronic Temperature Control
- Gallon Door Storage

AVAILABLE COLORS



White



Black




Fingerprint-Resistant Stainless Steel



TECHNICAL SPECIFICATIONS


PERFORMANCE		REFRIGERATOR		INSTALLATION DIMENSION	
Refrigerator (cu. ft.)	14.0	Product Type	Top Mount	Product (W x H x D)	29.7*66.5*31.3"
Freezer (cu. ft.)	4.0	Door Type	Side Swing	Width (Excluding Door)	29.7"
Total Capacity (cu. ft.)	18.0	No. of Shelves	2 Adjustable Glass	Width (Including Door)	29.7"
ENERGY STAR® Certified	Yes	Shelf Construction	Tempered Glass	Common Width	30.0"
Energy Consumption (kWh/Year)	363	Shelf Trim	White Décor	Width (Door Open 90° Excluding Handle)	30.5"
Safety Listing	UL Safety Listing	No. of Crisper Drawers	2 Humidity Crispers	Width (Door Open 90° Including Handle)	30.5"
ICE & WATER SYSTEM		LED Lighting	Yes (Ceiling)	Width (Door Fully Open Excluding Handle)	47.3"
Automatic Ice Maker	Optional (Sold Separately)	No. of Door Bins	3 (2 Gallon, 1 Half)	Depth (Excluding Handles)	31.3"
Ice Maker Kit	HIMT30G01	Door Bin Construction	1 Piece (Clear)	Depth (Including Handles)	31.3"
Ice Maker Manual	1 Level 1 Tray	FREEZER		Depth (Less Door)	27.6"
Ice type	Cubed	Door Type	Side Swing	Depth (to Hinge Cover)	26.7"
Daily Ice Production	2.9 lbs	No. of Shelves	1 Adjustable Glass	Depth (Door Open 90°)	58.1"
Ice Storage Capacity	4.4 lbs	Shelf Construction	Tempered Glass	Depth Type	Standard Depth
Water Inlet Pressure	207~700kPa	Shelf Trim	White Décor	Height (to Top of Hinge)	66.5"
COOLING SYSTEM		LED Lighting	No	Height (to Top of Door)	66.5"
Temperature Sensors	2	No. of Door Bins	2	Height (to Top of Case)	65.9"
Compressor Type	Fixed-Frequency	Door Bin Construction	1 Piece (Clear)	Installation Clearance	Sides 3.9", Top 3.9", Back 3"
Refrigerant (Type and Volume)	R600a/2.05oz(58g)	MATERIALS AND FINISHES		Carton (W x H x D)	30.6*69.8*32.8"
Evaporator	1	Door Style	Flat	Weight (Unit/ Carton)	176lbs./ 196lbs.
CONVENIENCE		Door Texture	Texture	INSTLIMITED WARRANTY	
Display Type	Internal/ Smooth Touch / Blue LED	Handle Type	Integrated	Warranty	2-Year limited
Temperature Controls	Electronic/ Digital	Hidden Hinges	Yes	Parts & Labor	2 Years
Auto Closing Door Hinge	Yes	Toe Grille	No	Sealed System (Parts & Labor)	5 Years
Leveling Legs	Yes	Reversible Door	Yes	Accessories	90 Days for Parts
Stand-By Mode	Yes	Cabinet Color	Black	UPC CODES	
Gallon Door Storage	Yes	Inner Liner Color	White	HRT180N6AWE (White)	810088360343
Garage Ready	Yes			HRT180N6ABE (Black)	810088360350
Noise Level (dB)	41			HRT180N6ASE (Fingerprint-Resistant Stainless Steel)	810088368257

HISENSE REFRIGERATOR

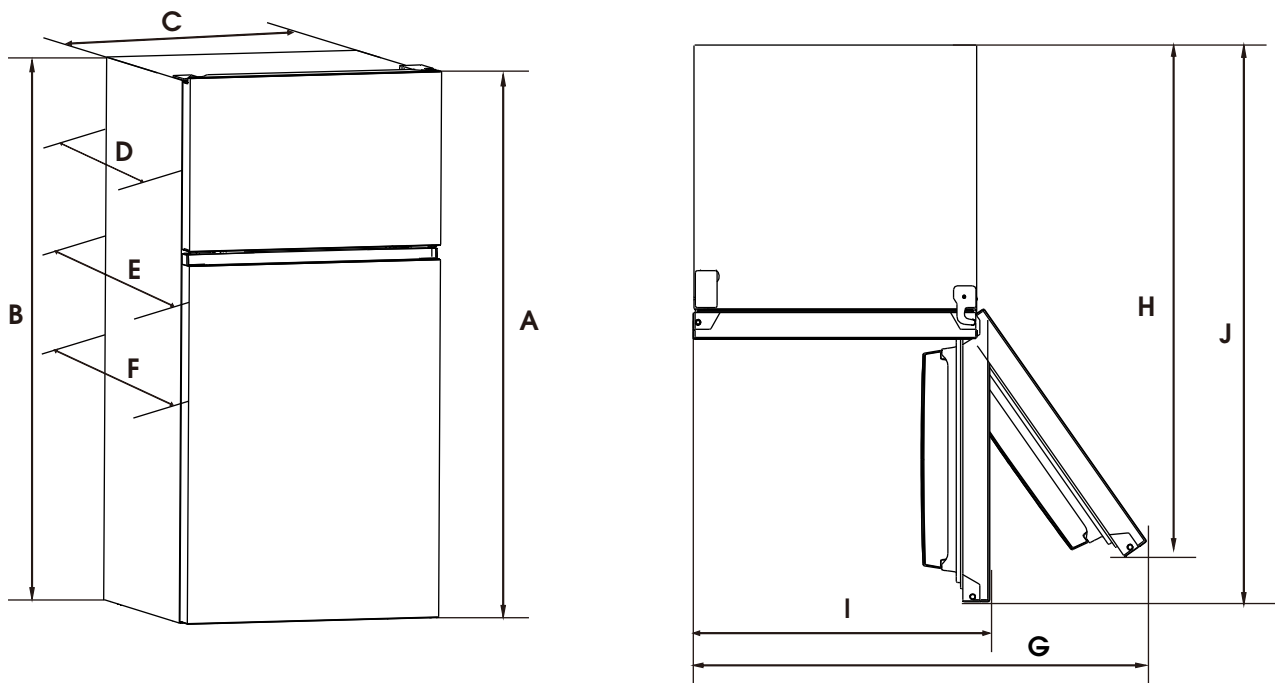

Model	Capacity	Height-Overall "A"	Height-Top of Cabinet "B"	Width-Cabinet "C"	Depth-with Cabinet "D"	Depth-with Handle "E"	Depth-with Door "F"	Width-Doors Open 125° "G"	Depth-Doors Open 125° "H"	Width-Doors Open 90° "I"	Depth-Doors Open 90° "J"
HRT180N6AWE	18.0 cu.ft	66.5" (1690mm)	65.9" (1674mm)	29.7" (754mm)	27.6" (700mm)	31.3" (794mm)	31.3" (794mm)	47.3 (1201mm)	53.2" (1350mm)	30.5" (775mm)	58.1" (1476mm)
HRT180N6ABE	18.0 cu.ft	66.5" (1690mm)	65.9" (1674mm)	29.7" (754mm)	27.6" (700mm)	31.3" (794mm)	31.3" (794mm)	47.3 (1201mm)	53.2" (1350mm)	30.5" (775mm)	58.1" (1476mm)
HRT180N6ASE	18.0 cu.ft	66.5" (1690mm)	65.9" (1674mm)	29.7" (754mm)	27.6" (700mm)	31.3" (794mm)	31.3" (794mm)	47.3 (1201mm)	53.2" (1350mm)	30.5" (775mm)	58.1" (1476mm)

LOCATION REQUIREMENTS

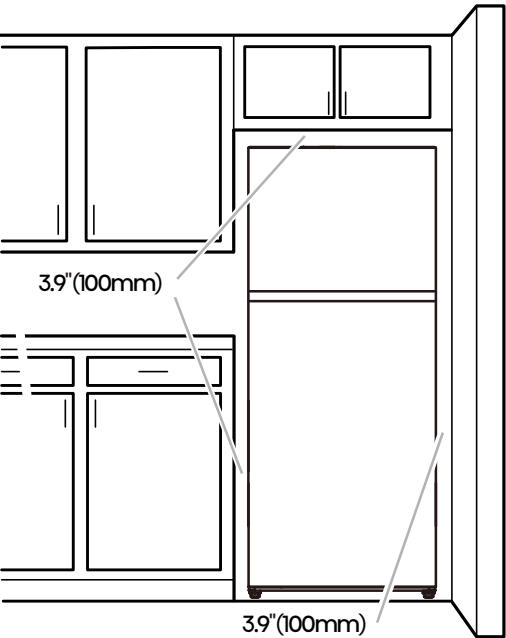

To ensure proper ventilation for your refrigerator, allow for a 3.9"(100mm) space on each side and at the top.
 Allow at least 3.0"(76mm) between back of cabinet and the wall.
 If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 3.9"(100mm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55F(13°C) to a maximum of 110°F(43°C).