


8090ML-02-US

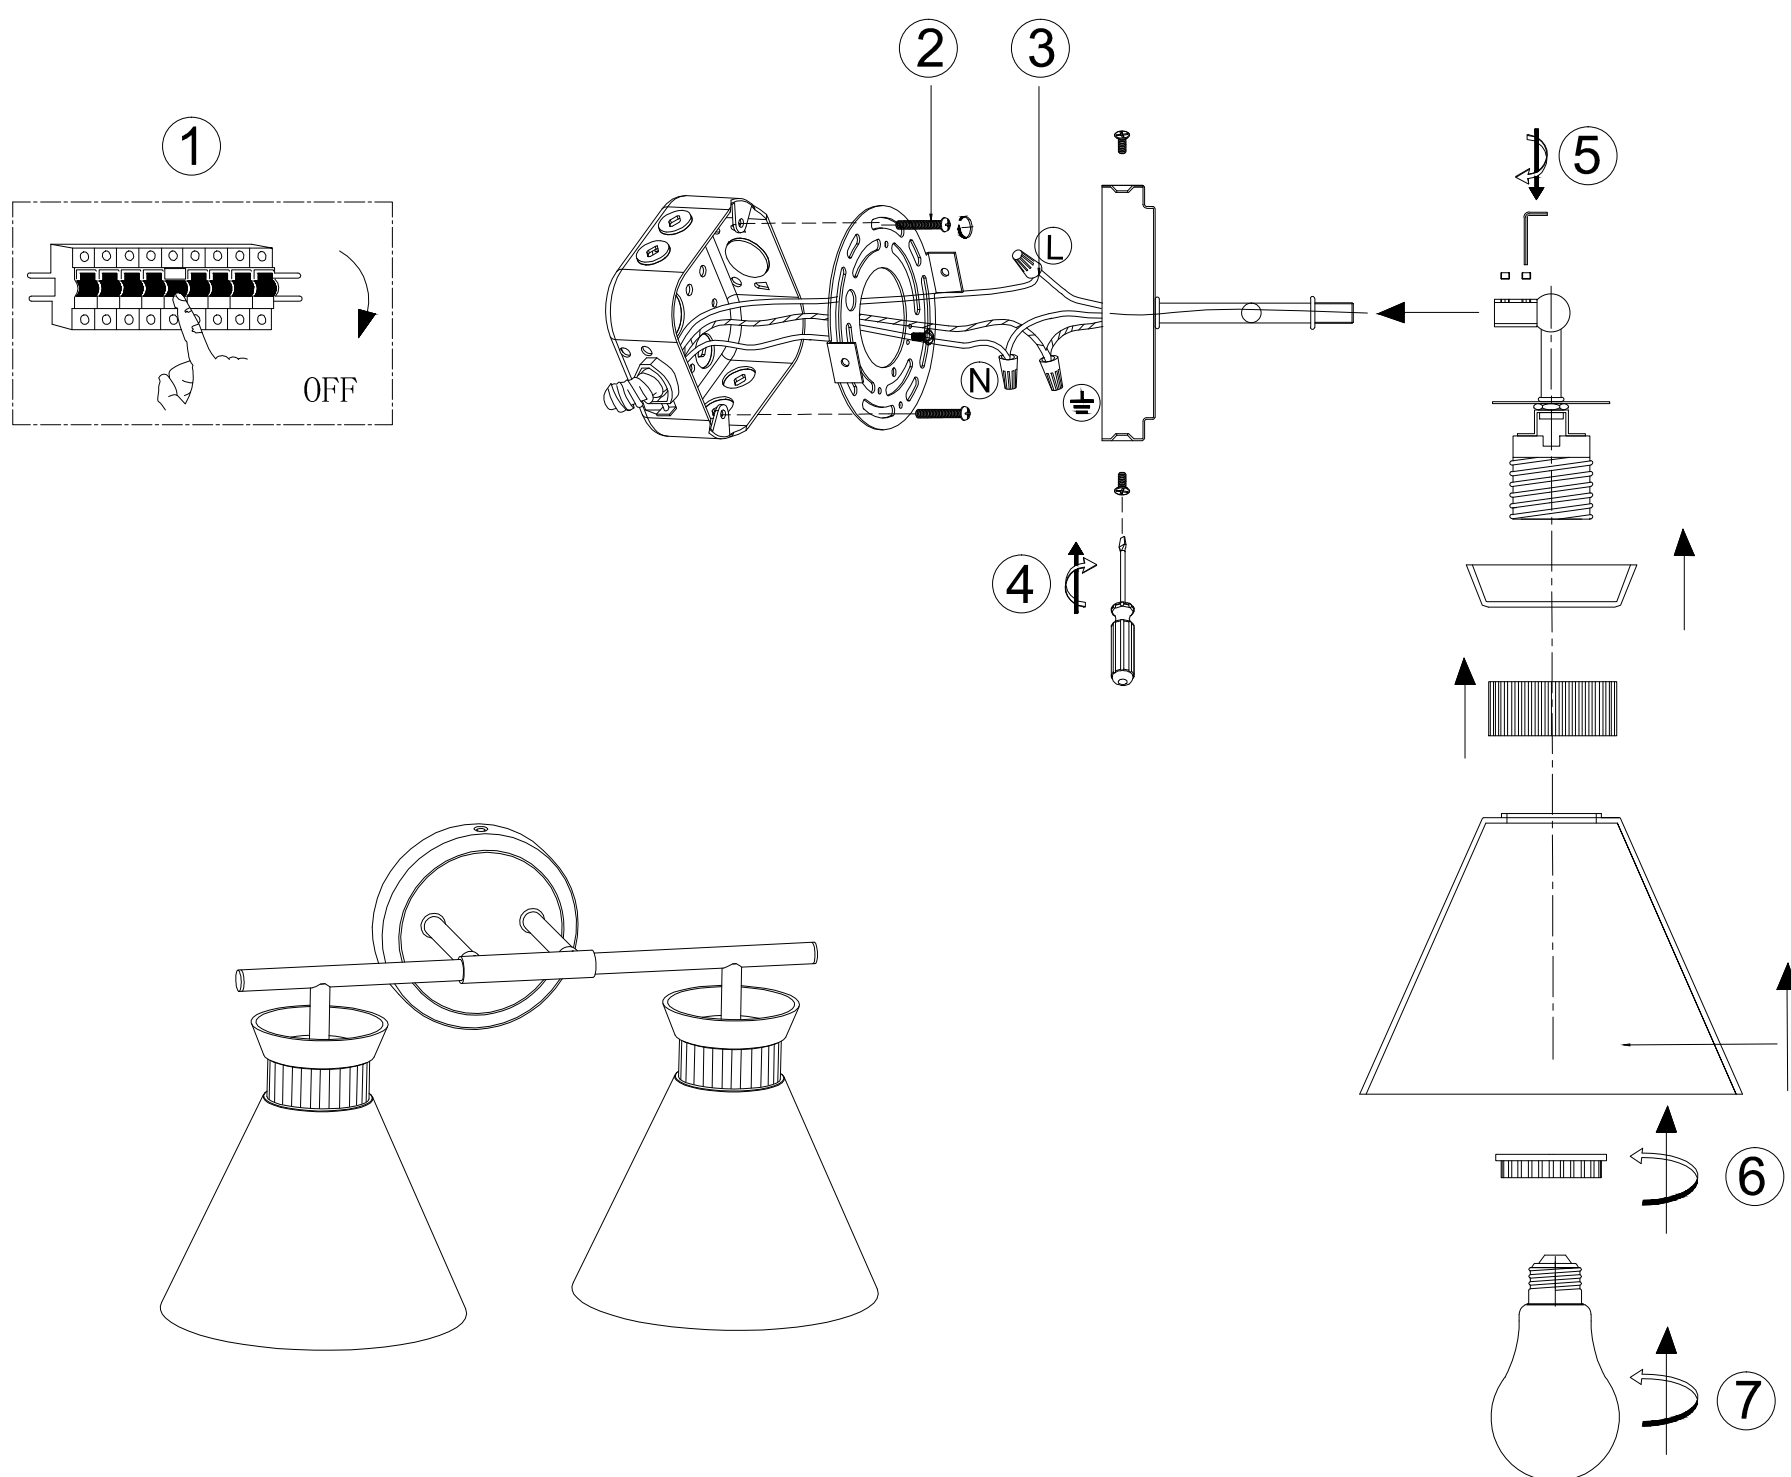

1 : Please turn off the power first .

2 : Screw the hanging board to the junction box.

3 : Connect all the wiring L/N/G as diagram shows using plastic connector supplied.

4 : Stick the ceiling on the mounting bracket Use the mounting screws provided with the fittings to tighten

5 :Insert the lamp body iron into the head tube, and lock the head tube with the hex socket screw with a wrench

6 : Fix the glass lamp shade on the lamp holder as shown in the picture, and fix it with a fixing cup

7: Install the light bulb (E26 socket).

8: Please turn on the power

