

KOHLER®

Roughing-In

K-1157-H, K-1157-LH/-RH PROFLEX® 7236 BATH WHIRLPOOL WITH HEATER

Product Information

Applicable products:	
Bath whirlpool with heater – drop-in	K-1157-H
Bath whirlpool with heater – left drain, tile flange	K-1157-LH
Bath whirlpool with heater – right drain, tile flange	K-1157-RH

Fixture*:	
Basin area:	
Bathing well	55" (1397 mm) x 21" (533 mm)
Top area	65" (1651 mm) x 26" (660 mm)
Weight	71 lbs (32.2 kg)
To overflow:	
Water depth	15" (381 mm)
Capacity	72 gal (272.5 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7.5
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump.

Installation Notes



Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 39 lbs/square foot (189 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

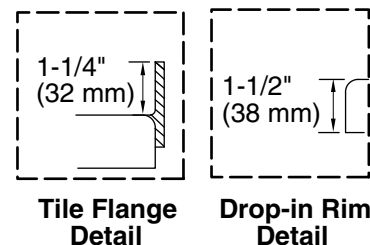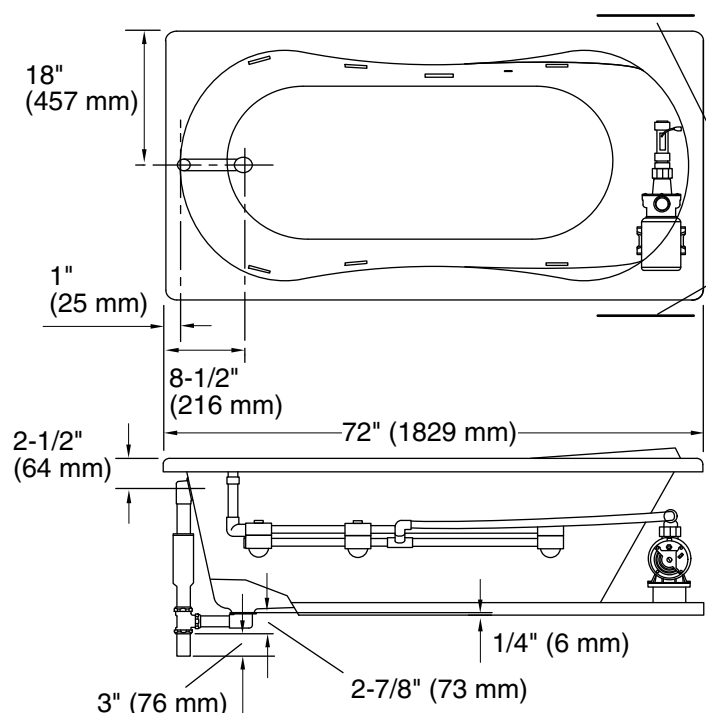

Pump/Control Access
(If Apron Is Not Used)
20" (508 mm) W x
15" (381 mm) H

