



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction
- Installs on 10" (254mm) centers minimum
- Designed to be installed on finished decks up to 2-5/8" (67mm)
- 1/2" CC inlets and outlets
- Includes test plug

OPERATION

- Can be installed with any Moen deck mounted roman tub trim kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

FLOW

- Designed to deliver 13 gpm at 45 psi. (49L/min)

CARTRIDGE

- Nonmetallic and stainless steel materials


STANDARDS

- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


NOTE: Plumbing codes require this product to be used with a device conforming to ASSE.

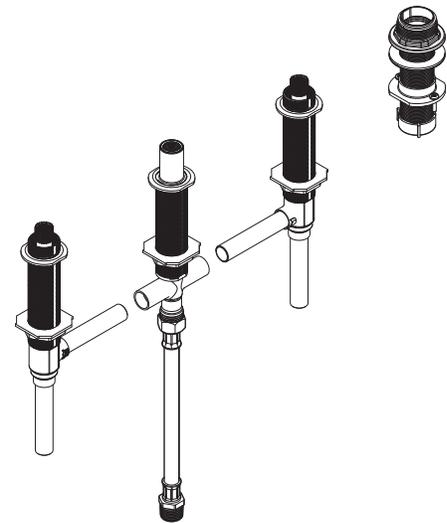

Model: 9792

Moen® Roman Tub High Flow Rough-In Valve Adjustable Type

104465 Thermostatic mixing valve sold separately is certified to ASSE 1070 and CSA B-125.3

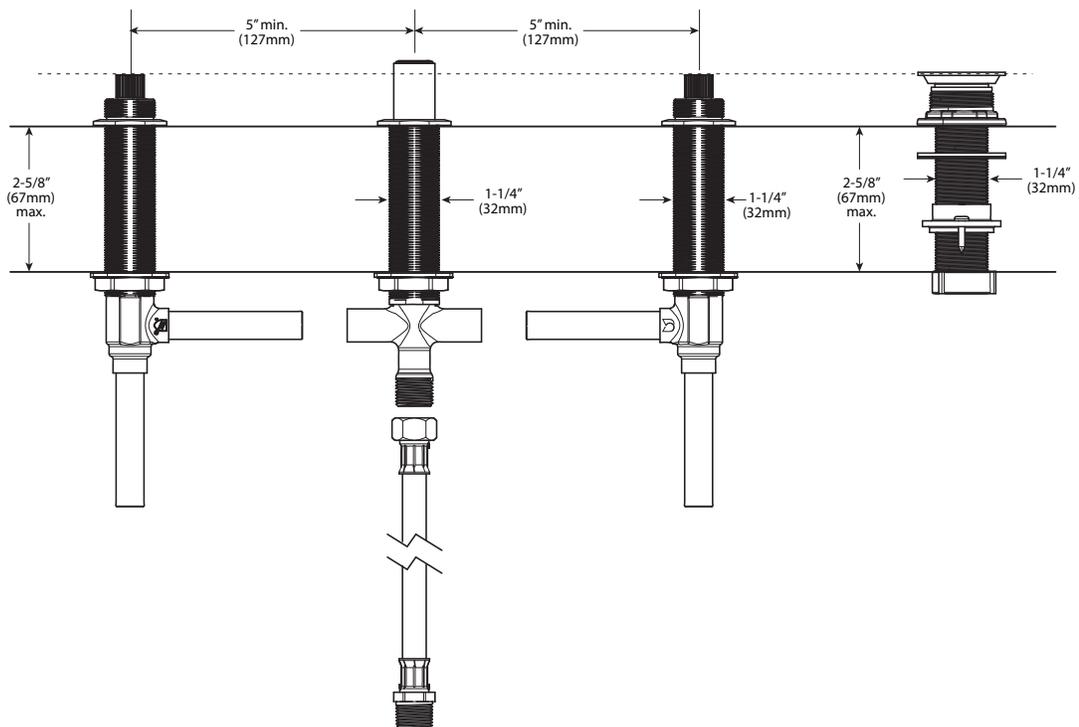

CRITICAL DIMENSIONS

(DO NOT SCALE)