

## Globe LED

Ceiling Cord Mounted • Damp Location Listed **PROGRESS LED**

### Description:

Globe LED Collection One-Light LED Pendant

### Specifications:

- Opal Glass Globe
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 5.5 in W., 1 in ht., 5.5 in depth
- Mounting strap for outlet box included
- 120 in of wire supplied

### Performance:

Number of Modules	1
Input Power	9 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	624/66 (LM-82)
Lumens/LPW (Delivered)	439/47.2 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed
	Meets California Title 24 JA8-2016


## P500147-109-30



### Dimensions:

Diameter: 8 in  
 Height: 9-3/4 in  
 Overall Ht. W/Cord: 122 in

Opal Glass Globe  
 Width: 7-7/8 in  
 Height: 7-3/8 in

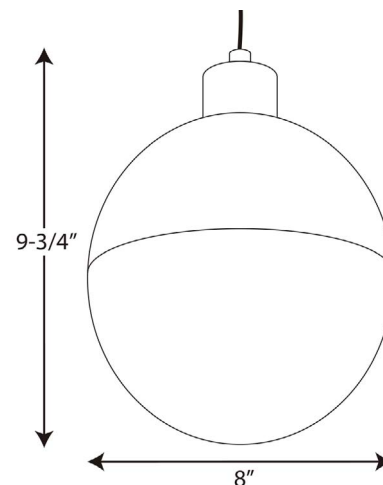

# P500147-109-30

## Dimming Notes:

---

P500147-109-30 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

## Dimming Controls:

---

Lutron\_Diva DVELV-300P  
Lutron\_Nova T NTELV-300  
Lutron\_Caseta  
Lutron\_Ariadni AY-600P  
Leviton\_Illumatech IPI06-1LZ  
Leviton\_SureSlide 6672  
Lutron\_Skylark Contour CTCL-153P  
Lutron\_Diva DVCL-153P  
Lutron\_Toggler TGCL-153P  
Lutron\_Maestro MACL-153M  
Lutron\_Ariadni AYLV-600P  
Lutron\_Nova T NTLV-600  
Lutron\_Maestro MAELV-600  
Lutron\_spacer/system SPSELV-600  
Leviton\_Renoir II AWRMG-EAW  
Lutron\_Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.