

# S3398TRM Shower/Hand Shower Trim Specification Submittal

Location:

## Model Numbers

- ☐ **S3398TRM**  
Shower/Hand Shower Trim
- Valve Options:**  
-S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier  
-S162 Series Temptrol VersaFlex Shower Valve requires TC modifier

## Feature Highlights


- Solarity Shower/Hand Shower Trim.
- Requires Temptrol VersaFlex Pressure-Balancing Shower Valve.
- Integral diverter.
- Metal lever handle.
- 30" slide bar for hand shower wand.
- Dual checks for backflow protection.
- 60" flexible metal hose.
- Single-mode HydroMersion® hand shower wand with Non-Positive Shutoff (NPSO).
- Single-mode Hydromersion showerhead.
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

## Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation
- CALGreen® 1.5 gpm (5.7 L/min)



## Options/Modifications

- ☐ **15**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish
- ☐ **L1** Less showerhead
- ☐ **L2** Less hand shower wand
- ☐ **L3** Less showerhead and hand shower (head and wand only)
- ☐ **L4** Less head, arm, and flange
- ☐ **L5** Less hand shower system
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim (includes TA-10® & T-12A) *used with S162 Series Temptrol VersaFlex Valve*

## Warranty

**Limited Lifetime** - for residential installations.  
**10 Years** - for commercial/industrial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



## SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S3398	STN		1.5	TRM		S3398STN15TRM
S3398	MB	L3		TRM	TC	S3398MBL3TRMTC

**Notes:** No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

## Architectural/Engineering Specification

Symmons Solarity Shower and Hand Shower Trim \_\_\_\_\_ Includes Solarity Shower/Hand Shower Trim for Temptrol VersaFlex Pressure-Balancing Shower Valve. Features integral diverter, metal lever handle, 30" slide bar for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, single-mode HydroMersion hand shower wand with NPSO, single-mode HydroMersion showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower wand, L3 = Less showerhead and hand shower (head and wand only), L4 = Less head, arm, and flange, L5 = Less hand shower system, L7 = Less handle, MB - Matte Black finish, STN = Satin Nickel finish, and TC = Test Cap Trim.

## Dimensions

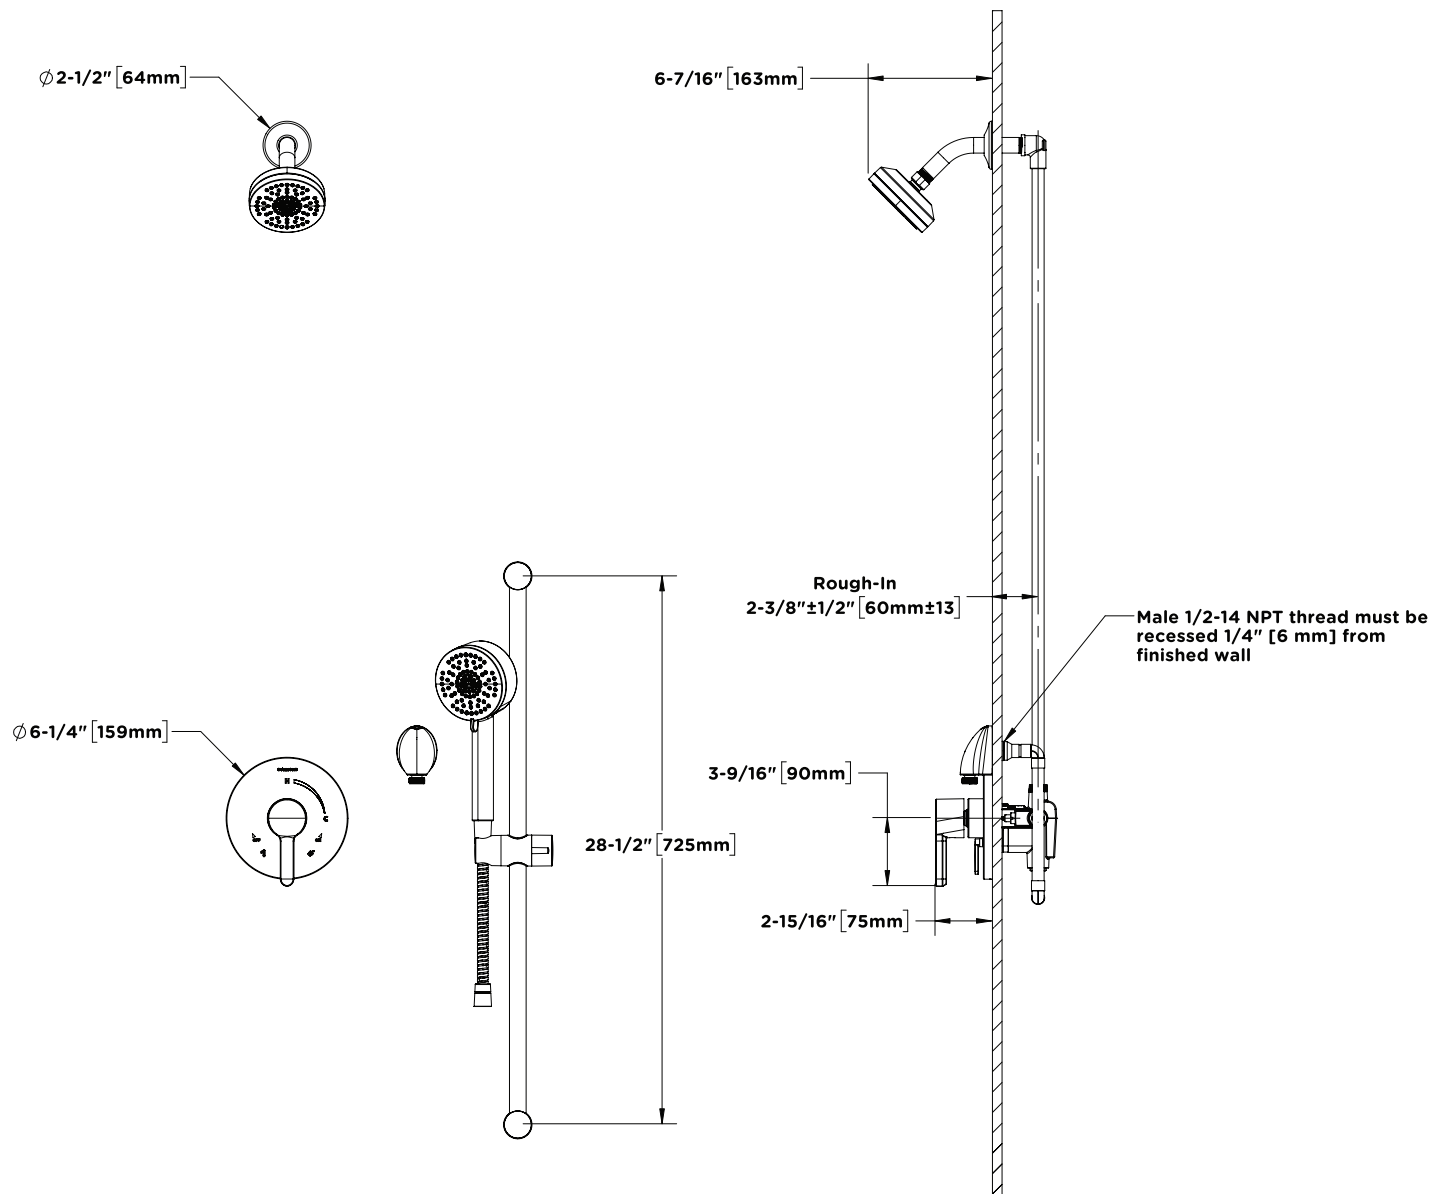

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.