

Features

- Powered by the 30-year hybrid energy system.
- Required for Memoirs® wall-mount Touchless faucets.
- 0.5 gal/min (1.9 l/min) flow rate.
- 30 second maximum cycle time.
- Ideal for use with KOHLER Vessels.
- Low-lead (SDWA) compliant

Installation

- Easy installation. Hybrid battery powered. It does not require AC connection.



ADA

CSA B651


OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF 372
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

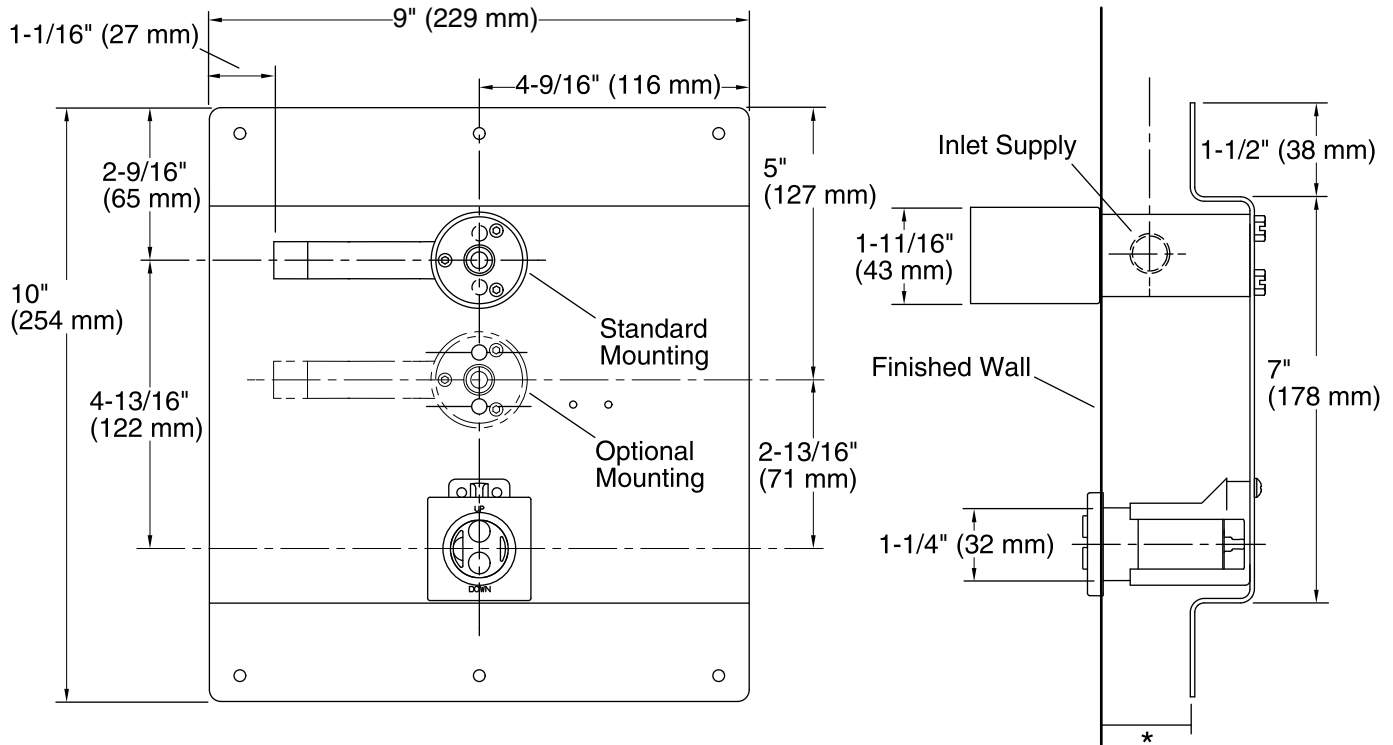

*Roughing-in range varies depending on faucet trim. Consult the faucet trim specification sheet for dimensions.

Technical Information

All product dimensions are nominal.

Valve body: Cast Brass

Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 45 psi (3.1 bar)

Power source: 3.6V Size C (Hybrid Energy Cell), included

Notes

Install this product according to the installation guide.

Reference the installation instructions for specific framing information.

Standard mounting for use with faucet trim: K-T11836, K-T11839, K-T11840, and K-T11841.

Standard or Optional mounting for use with faucet trim: K-T11837 and K-T11838.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.