

ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0116 / C0117

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):


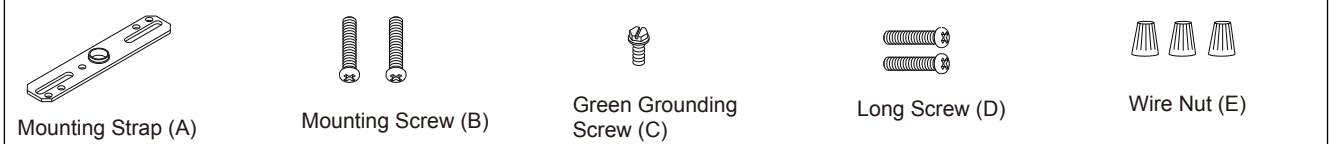


Fig.1

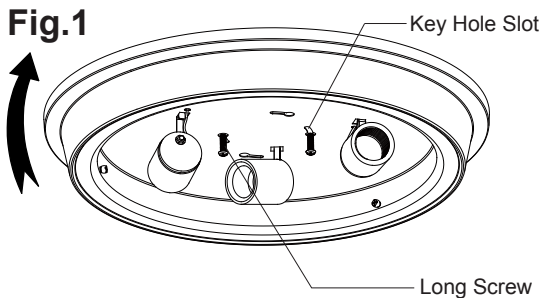


Installation Steps

Turn off the power at fuse or circuit box


1. Attach the two long screws to the holes on the mounting strap. Thread them in part way: 2 to 3 turns only.
2. Attach the mounting strap to the outlet box using two mounting screws.
3. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
 - Connect the hot wire (usually black insulation) from the power source to the black wire from the fixture.
 - Connect the neutral wire (usually white insulation) from the power source to the white wire from the fixture.
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting strap with the green grounding screw, or connect to the source grounding wire if available.Carefully put the wires back into the outlet box.
4. Attach the ceiling pan to the mounting strap by inserting two long screw heads into the key holes. Rotate the ceiling pan until it is locked into place, and then tighten the long screws to secure it. (See Fig.1)
5. Install three bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.
6. Attach the glass shade to the ceiling pan by aligning studs and slots, and turn it clockwise until it is locked in place.
Caution: Do not over tighten.

Turn on the power at fuse or circuit box

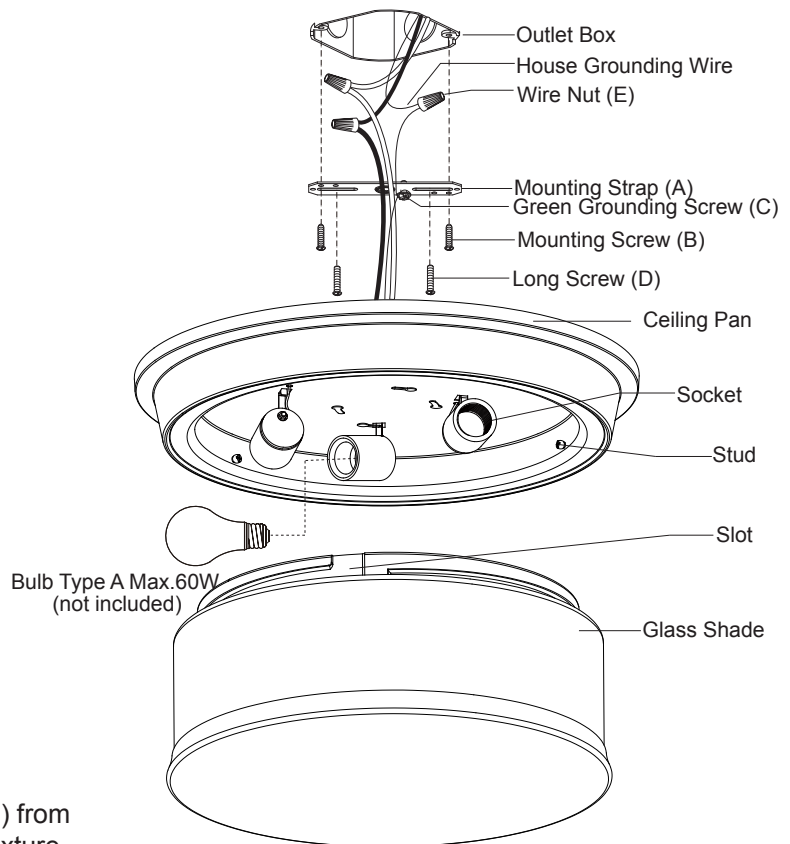


The following parts are available for re-order if damaged or missing.


Spare Parts List:

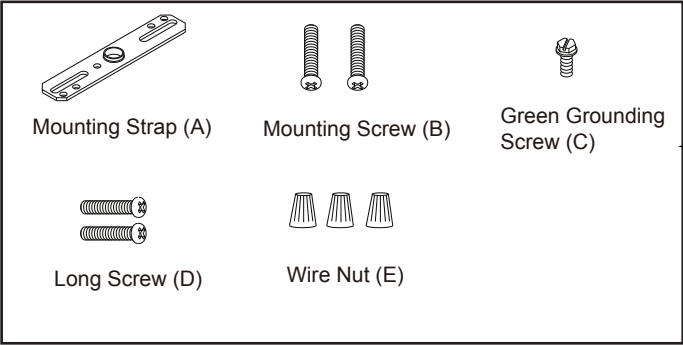

Assembly Kit
5384MM (1 SET)



Glass Shade
9815SO (1PC) FOR C0116
9816FO (1PC) FOR C0117

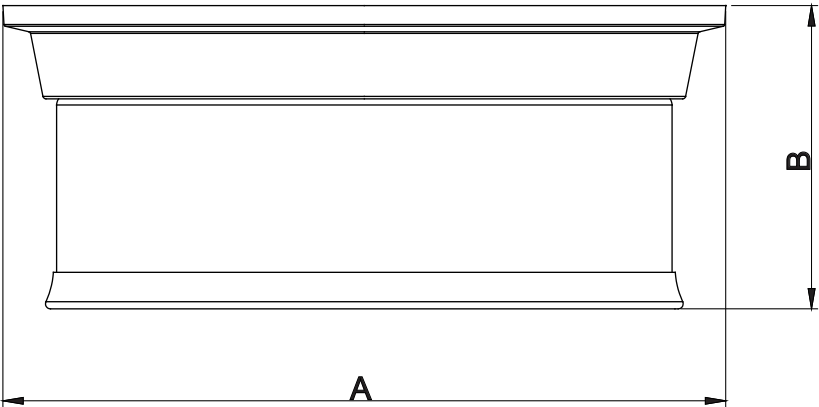

A: 16"

B: 5-3/4"