


NOTE: Scan the QR code and install the APP in your phone, or search and install "FanLamp Pro" from Google Play, Apple App and other APP stores. Make sure your phone is connected to the internet and bluetooth enabled.

- Pair button. Click it within 5 seconds after the fan is powered on from wall switch. After the fan flashes or beeps, it has been successfully paired with the phone, it can be controlled through it.
- Slide to change the fan speed.
- Slide to change the brightness of the light.
- Quick switch for "White" light color.
- Quick switch for "Yellow" light color.
- Quick switch for "Natural" light color.
- Night mode, dim the lights.
- Fan moves forwards.
- Change the direction of the wind (Not applicable on this fan).
- Timing the fan.
- Natural wind: fan speed will change automatically when use this function.
- Sleeping wind (Not applicable on this fan).
- Fan moves reversely.
- Turn on/off the light.
- Turn on/off the fan.
- Unpair button. Click it within 5 seconds after the fan is powered on. After the fan flashes or beeps, it has been successfully unpaired with the phone.

INSTALLATION MANUAL

FANSCONCE

Model No.: CFL-1196-01

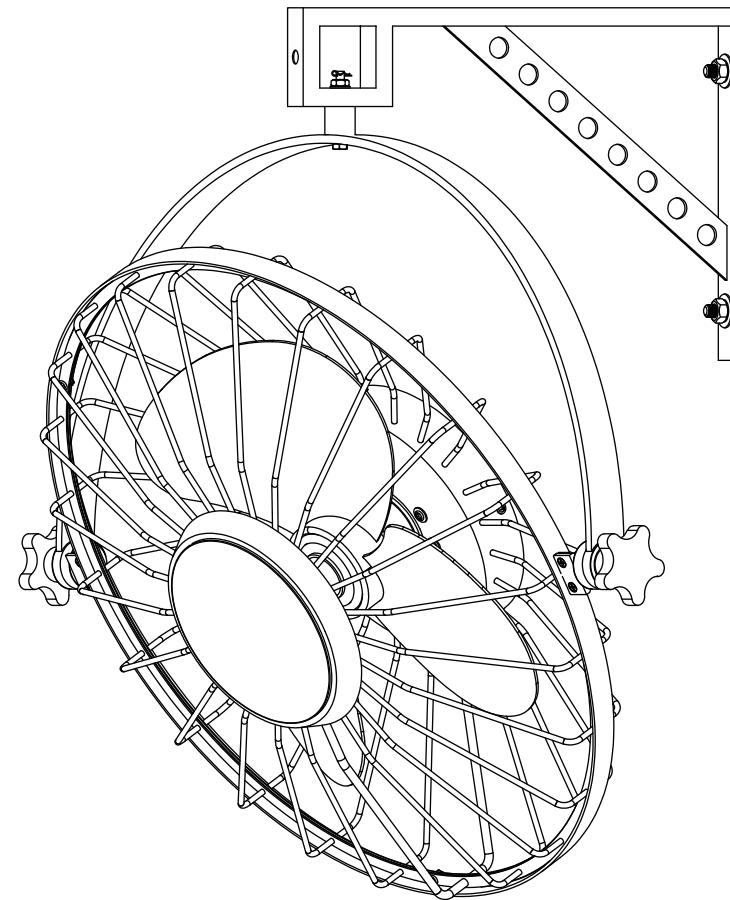


Scan for Installation Video


TOOLS REQUIRED




Ladder



Pliers



Wire Strippers




Screwdrivers








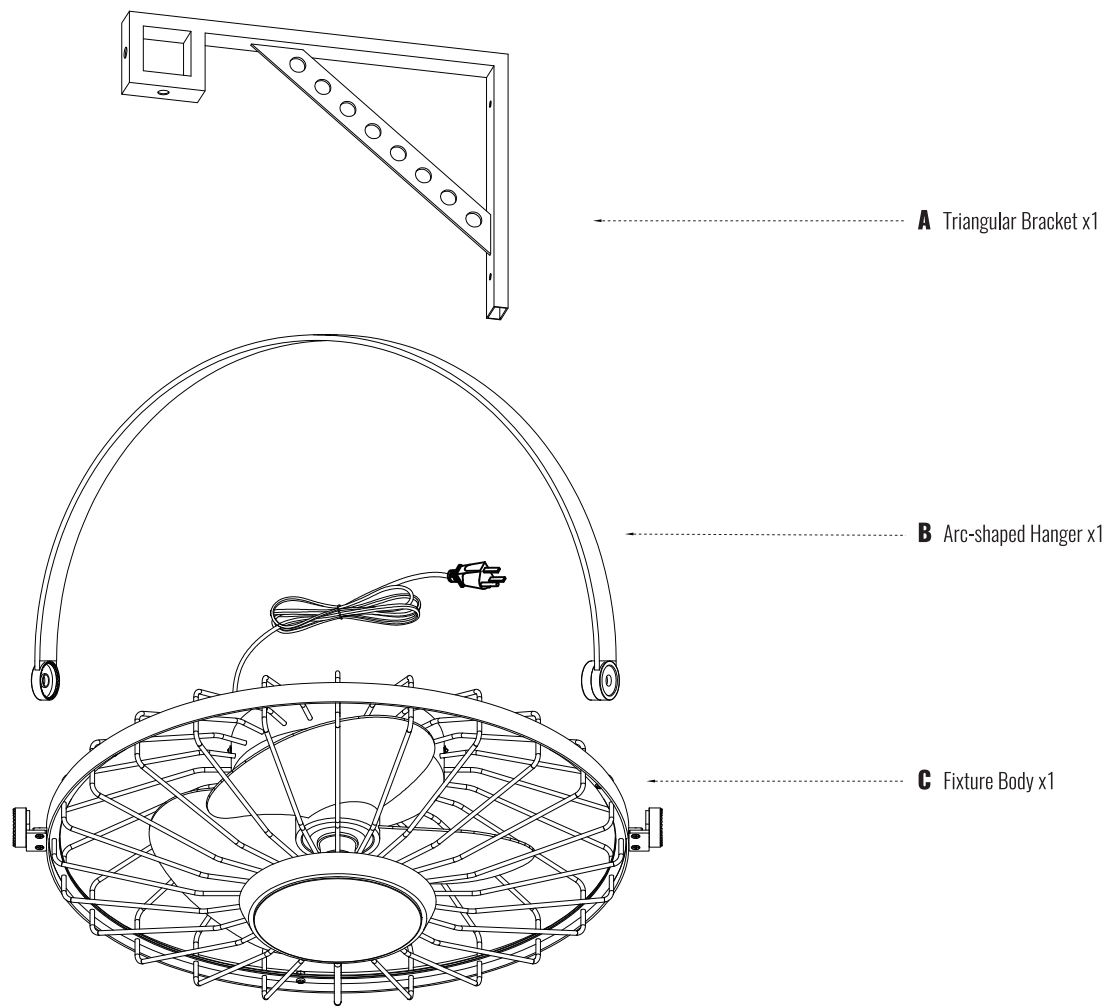








Power Drill

PACKING LIST



INSTALLATION KIT


AA		2×	BB		1×	CC		1×	DD		1×
	Plum blossom lock			Sleeve			Hex bolt			Hex Nut	
EE		2×	FF		1×	GG		2×	HH		1×
	Wood Screw			Flat Washer (large)			Flat Washer (small)			Safety clevis pin	
II		2×	JJ		2×	KK		2×	LL		1×
	Anchor Bolt			Remote Holder Anchor			Remote Holder Screw			Remote Holder	
MM		1×	NN		1×						
	Remote Control			Glove							

NOTE:
Some extra hardware may be included. The quantity listed above is the number required for installation.


INSTALLATION

1. Install Arc-shaped Hanger

Align the holes of fixture body (C) with arc-shaped hanger (B) and close them together, then secure with plum blossom lock (AA).


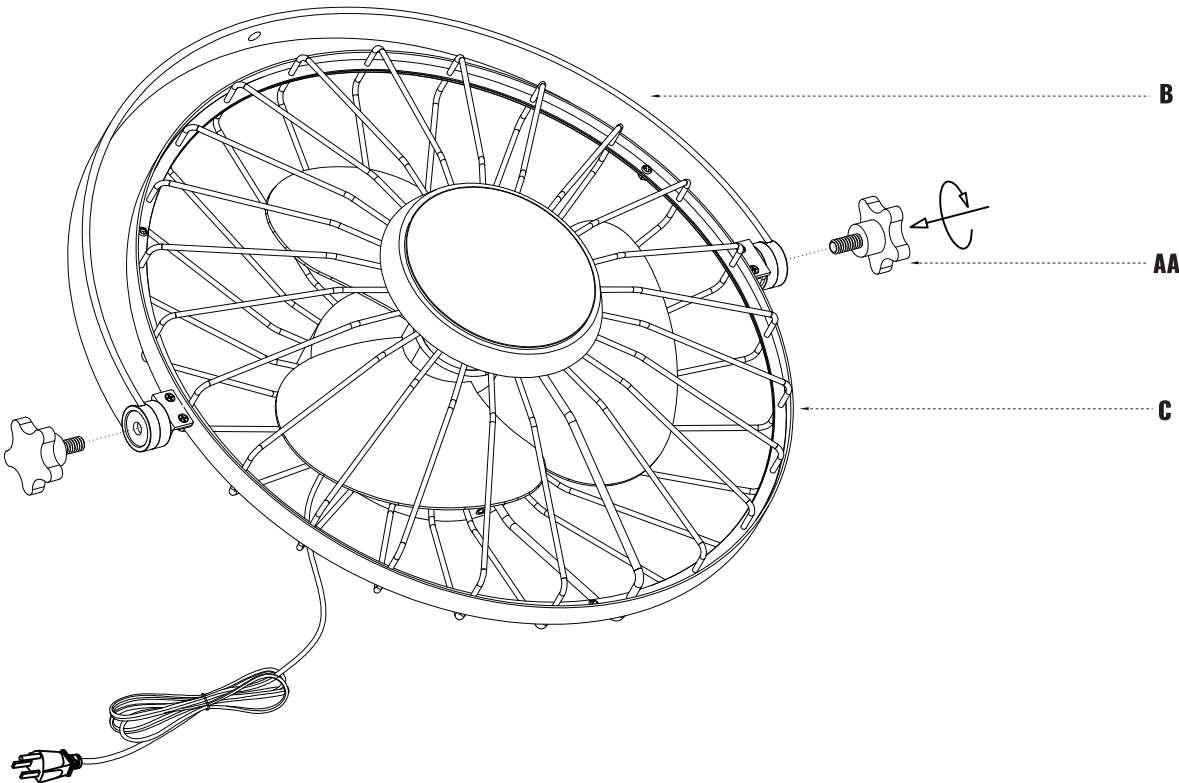


2. Installation Diagram for Solid Wood Wall Paneling

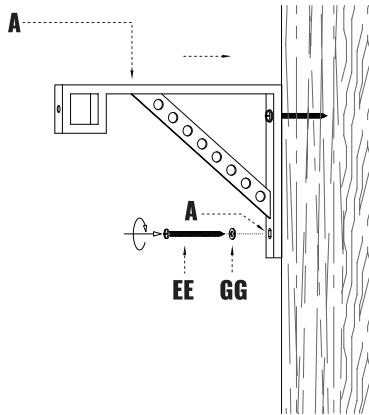


STEP 1: Adhere triangular bracket (A) to the corresponding wooden wall.
STEP 2: Thread wood screw (EE) through flat washer (small) (GG) and tighten triangular bracket (A).


3. Installation Diagram for Cement Wall Surface

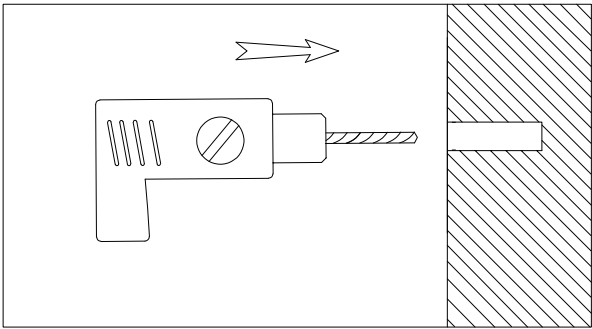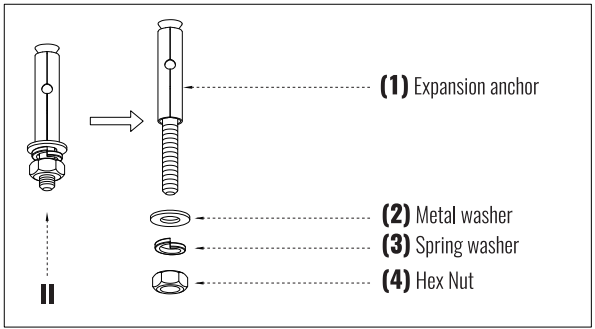


STEP 1: First fix the bracket position, then drill the holes.

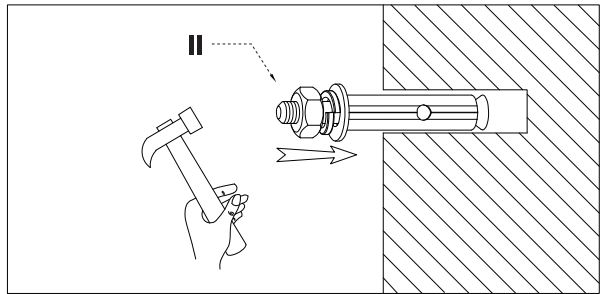


STEP 2: Insert expansion anchor (1) into the hole. Note: Do not remove hex nut (4), spring washer (3), and metal washer (2).

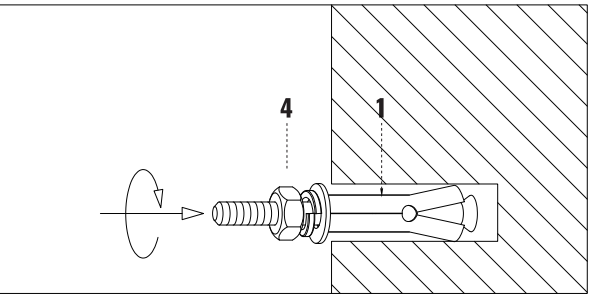

STEP 3: Tighten hex nut (4) until expansion anchor (1) feels secure and no longer loose.

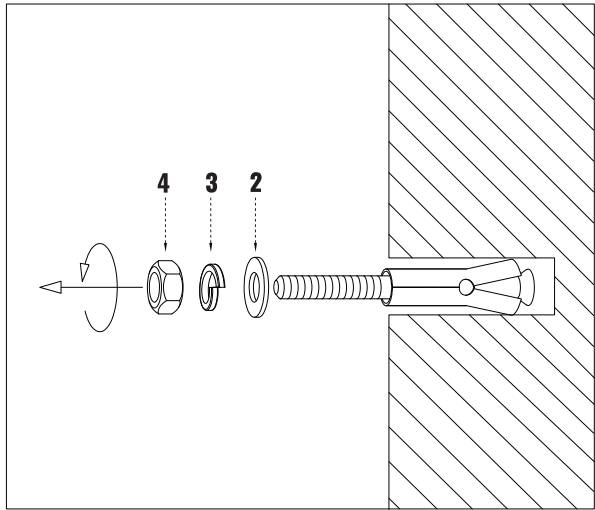


STEP 4: Remove hex nut (4), spring washer (3), metal washer (2) for use in the next step.

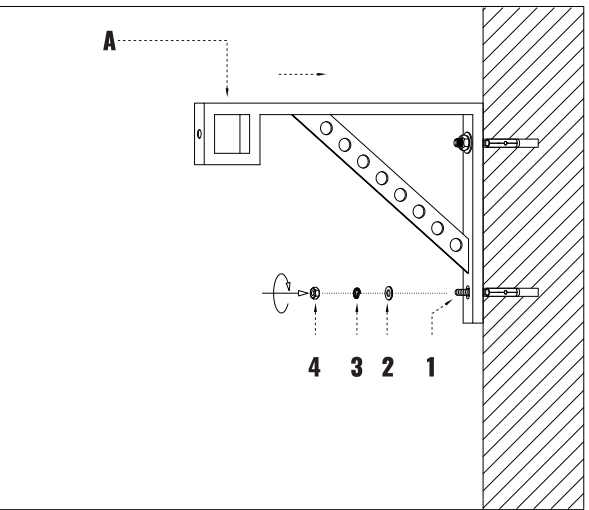

STEP 5: At last insert the hole on triangular bracket (A) into expansion anchor (1); Successively fit in metal washer (2), spring washer (3), and tighten with hex nut (4).


4. Installation Body

Secure hex bolt (CC) through arc-shaped hanger (B), sleeve (BB), triangular bracket (A), flat washer (large) (FF) using hex nut (DD).

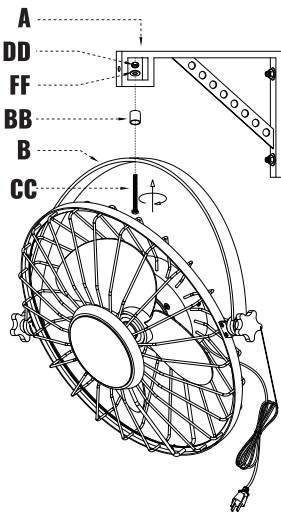

5. Fix Main Body


Insert safety clevis pin (HH) into the hole of hex bolt (CC).

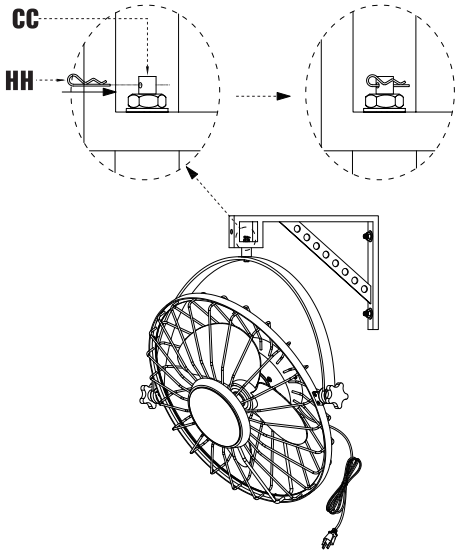


6. Adjustable from Multiple Angles

STEP 1: Loosen plum blossom lock (AA) to adjust fixture body (C) up and down, align it to the desired angle, and then tighten plum blossom lock (AA).

STEP 2: Adjust to the desired position by moving arc-shaped hanger (B) left or right.

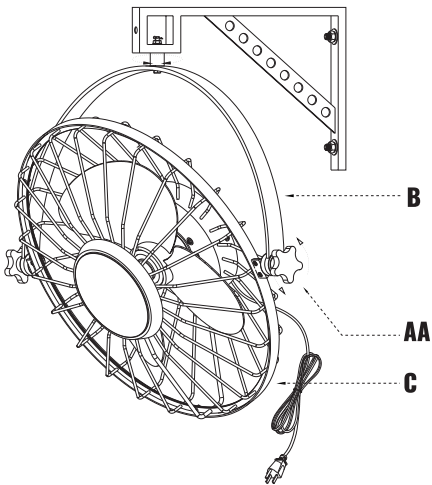


7. Power On and Use

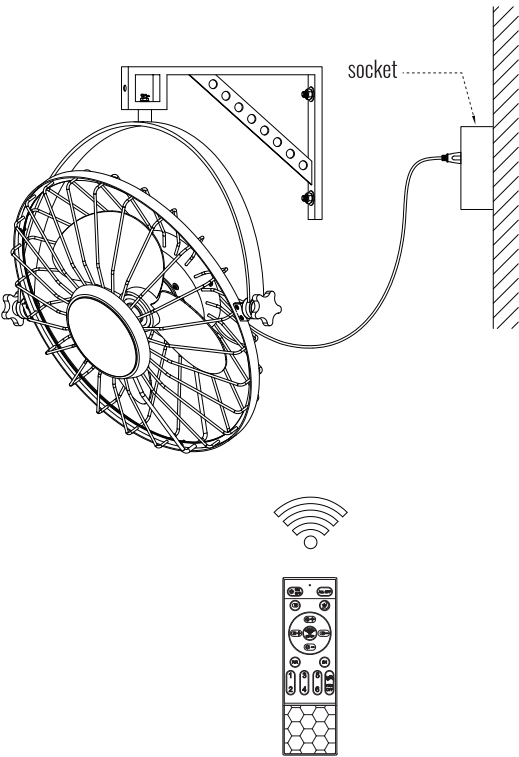


8. Adjustable from Multiple Angles


Adjust the view

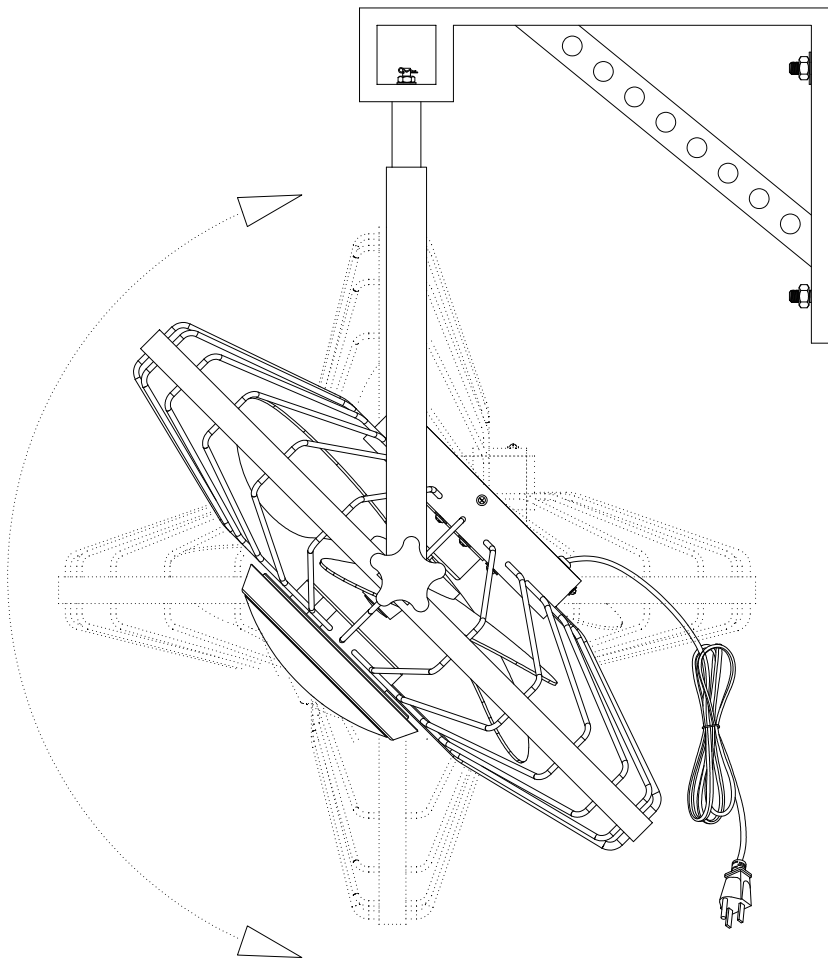

9. DIY Installation

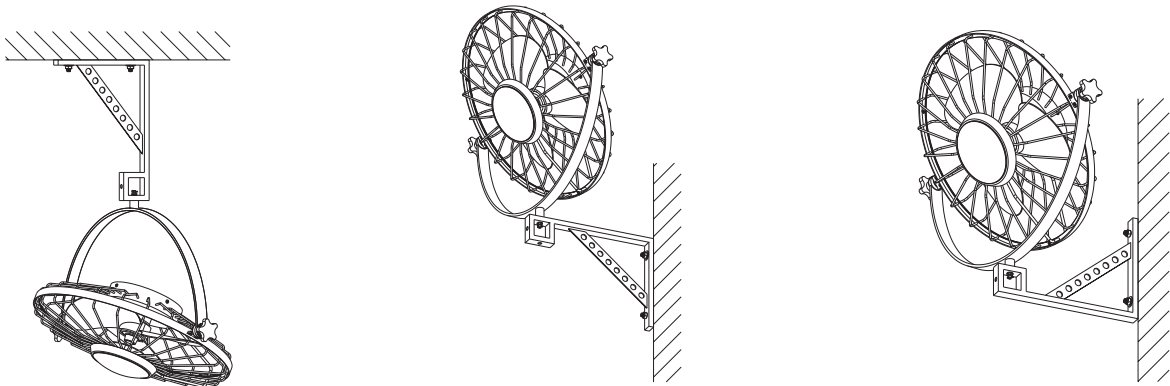

REMOTE CONTROL INSTRUCTIONS

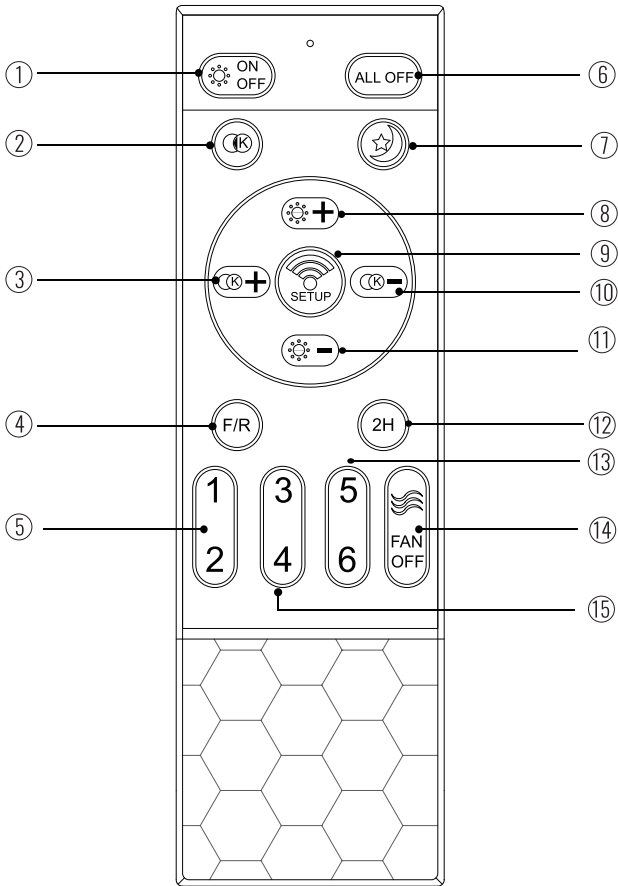


NOTE:

Please insert 2 batteries before using.
AAA 1.5V battery x 2pcs (not included)

- ① : Turn on/off the light.
- ② : Quick switch of the light color: Yellow Light→White Light→Natural Light.
- ③ ⑩: Adjust the light color temperature.
- ⑧ ⑪: Adjust the light color temperature.
- ④ ⑫: Fan moves forwards or reversely.
- ⑤ ⑬⑮ : 1-6 fan speed.
- ⑥ : Turn off fan including the light.
- ⑦ : Night mode, lights will be dimmed when press this button.
- ⑨ : SETUP
- ⑭ : Turn off the fan.

REMOTE SIGNAL PAIRING:

If the remote control loses the signal of the fan, turn off the power from wall switch, then turn it on, press ⑨ immediately for around 3 seconds, after the fixture beeps or flashes, then it's down.

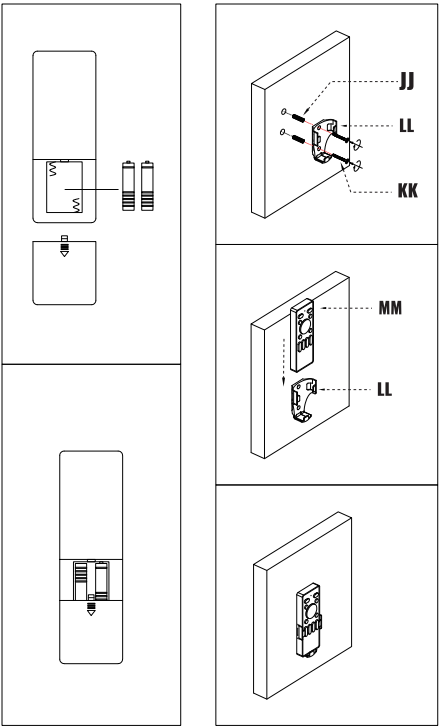

- STEP 1: Insert 2 batteries before using: AAA 1.5V battery x 2pcs (not included)
- STEP 2: Install the remote holder onto the wall with screws.