

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (1) A19 Medium Base Bulb 100W Maximum or
(1) Medium Base Vintage Bulb is recommended but not supplied.

Estimated Assembly Time: 30-45 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents



A Crossbar Assembly x 1



B Fixture Body x 1

STEP 1 – Installing the Crossbar Assembly

- A. Secure the Crossbar Assembly (A) to the outlet box (not included) with outlet box screws (not supplied). Tighten until snug.

NOTE: The preassembled mounting nipple on the crossbar should protrude outward.




Figure 1

STEP 2 – Test Fitting backplate to Crossbar Assembly

- a. Remove lock ball from Crossbar Assembly (A). Fit backplate and the Fixture Body (B) over the nipple on Crossbar Assembly (A) and secure with lock ball. **Note:** The backplate should be snug against the wall and the lock ball. If not, adjust the length of the nipple on the crossbar by unscrewing the preassembled hex nuts. Then, screw the nipple in or out of the crossbar until the desired length is achieved. Once the backplate is secure, remove the lock ball and Fixture Body (B) and proceed to Step 3.

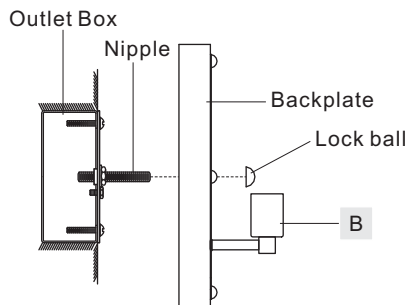


Figure 2

STEP 3 - Wire Connections

- A. Wrap bare or green ground wire around green ground screw on the crossbar, no less than 2 inches from the end of the wire. Tighten the green ground screw.
B. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

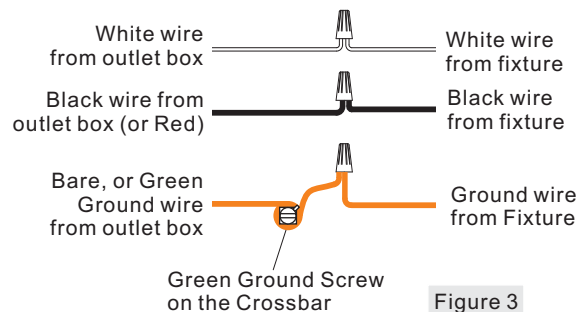


Figure 3

STEP 4 - Install the Fixture Body and the Bulb

- A. Re-attach the backplate and Fixture Body (B) to the Crossbar Assembly (A). Secure with the previously removed lock ball. Hand tighten until snug.
B. Insert the bulb onto socket and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!

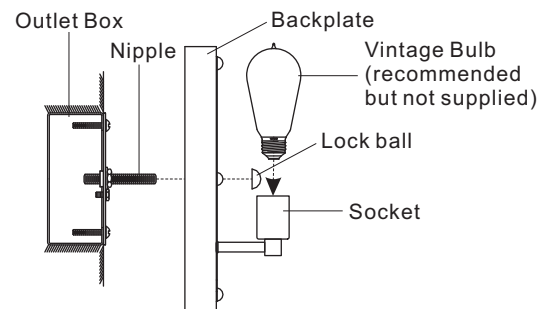





Figure 4

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoizel.com

WTY8701BN

FINISH: BRUSHED NICKEL

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

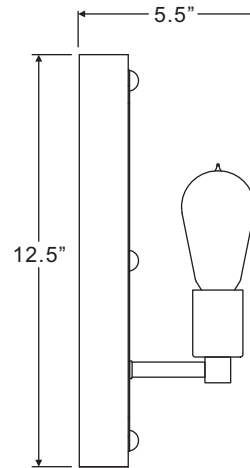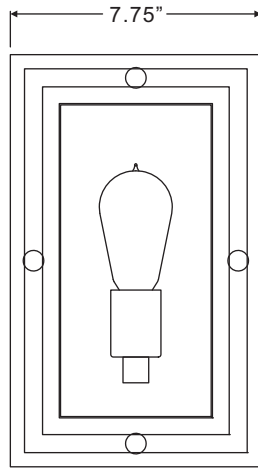

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoise.com