


Features

- Recess or surface mount
- Mirrored doors and interior
- 3-way adjustable concealed hinge system
- SAFESEAL™ gasket frame
- Rust-free aluminum construction
- Can be installed as a left- or right-hand door swing
- Three adjustable glass shelves
- 36" (91.4 cm) x 30" (76.2 cm) x 4-5/8" (11.7 cm)

PLM3630W
ALSO PLM3630B

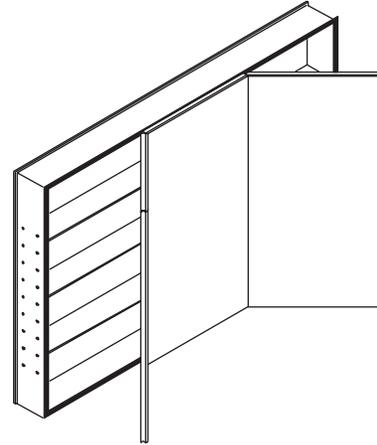

Codes/Standards Applicable

Specified model meets or exceeds the following:

- None applicable

Specified Model

Model	Description	
PLM3630W	Beveled edge, white interior	<input type="checkbox"/>
PLM3630B	Beveled edge, black interior	<input type="checkbox"/>
Required Accessories - For Surface-Mount Installations Only		
M30SKD4A	Aluminum side kit	<input type="checkbox"/>
PLSK30	Mirrored side kit	<input type="checkbox"/>
Refer to the Price Guide for additional side kit colors and finishes		
Optional Accessories		
SOMM	Black swing-out magnifying mirror	<input type="checkbox"/>
Light options and additional accessories are also available. Refer to the Price Guide for more information.		

PL SERIES FLAT DOOR CABINET

Technical Information

Roughing-in opening	35-1/4" (89.5 cm) x 29-1/4" (74.3 cm) x 4" (10.2 cm)
Door opening angle	170°

Installation Notes


Install this product according to the installation guide.

When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1" (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors (provided) must be inserted before installing the screws.

Modular components can be joined horizontally. When ganging cabinets: rough opening width/height = total width/height of all cabinets and lights minus 3/4" (1.9 cm).

Recessed cabinets project 7/8" (2.2 cm) from wall.

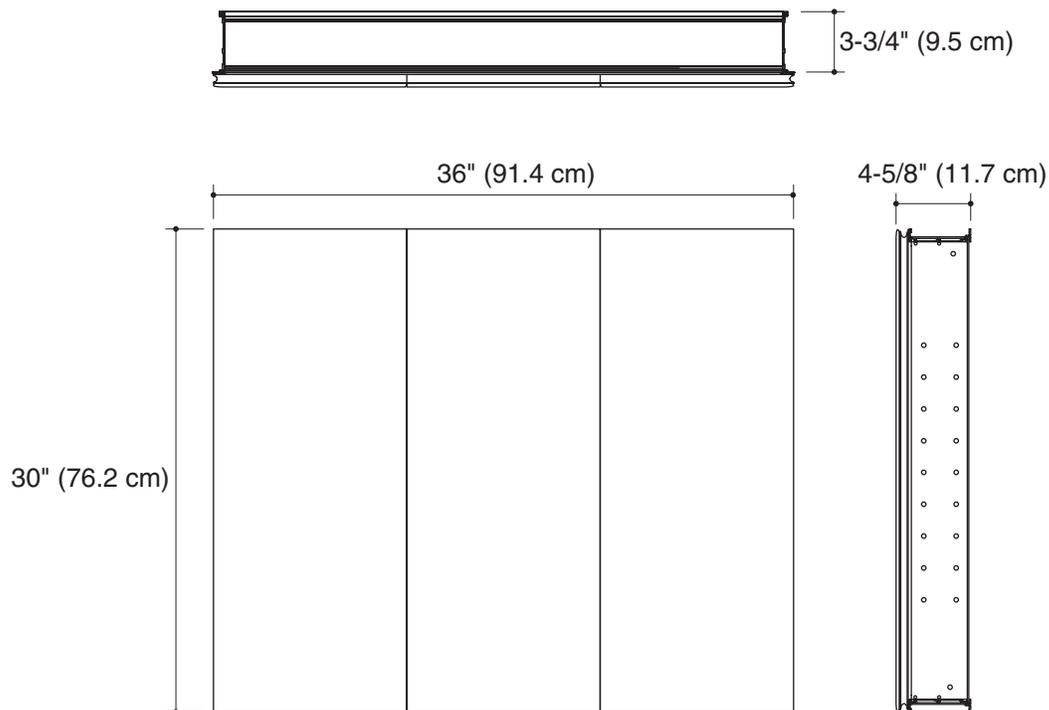

Product Diagram