


- 8P8-WS2-VRISCC Finish(CC) ☐
- 8P8-WS2-VRISBB Finish(BB) ☐
- 8P8-WS2-VRISBG Finish(BG) ☐
- 8P8-WS2-VRISBBG Finish(BBG) ☐
- 8P8-WS2-VRISGS Finish(GS) ☐

- Push Button Diverter
- Includes OX8 Valve
- Pforever Seal™

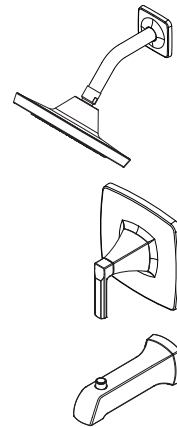

Specifications

Features

- 1.75 GPM Flow Rate (Showerhead)
- Raincan Showerhead
- Brass Ball Joint
- Includes OX8 Valve
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- Wipe Clean Nozzles
- SecurePfit™ with Anti-Handle Wobble
- Temperature Limit Stop
- Quick Connect Tub Spout
- Push Button Diverting Tub Spout
- Pressure Balanced Valve Included
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
 - ASSE 1016
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

