


PORTABLE GAS FIREPIT

MODEL #67380-D

Garden Treasures® is a registered trademark of LF, LLC. All rights reserved.

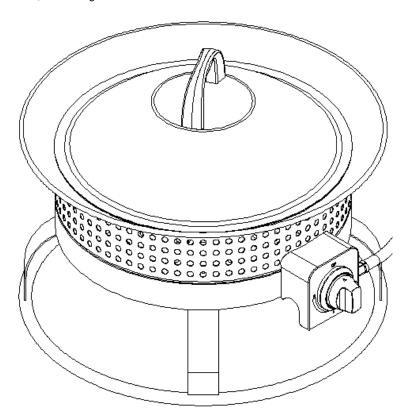

lack

A DANGER

If you smell gas:

- 1. Shut off gas to the appliance.
- 2. Extinguish any open flame.
- 3. If odor continues, keep away from the appliance and immediately call your gas supplier or fire department.



WARNING

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance. An LP-cylinder not connected for use shall not be stored in the vicinity of this or any other appliance.



WARNING

For outdoor use only.





Design certified under ANS Z21.97 - CSA 2.41-(2012) Requirements for Outdoor Gas Fireplaces



CARBON MONOXIDE HAZARD

This appliance can produce carbon monoxide which has no odor.

Using it in an enclosed space can kill you.

Never use this appliance in an enclosed space such as a camper, tent, car or home.

ATTACH YOUR RECEIPT HERE

Serial Number — Purchase Date — —



Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-800-643-0067, 8 a.m. - 8 p.m., EST, Monday - Friday.



PART	DESCRIPTION	QUANTITY
Α	Lid	1
В	Body	1
С	Pumice Stones	1 box
D	Handle	1
Е	Wrench	1
F	Tank Holder	1
G	Control Knob (preassembled)	1



HARDWARE CONTENTS (shown actual size)









Qty. 2











M6

Nut

DD

Spring Washer

Qty. 2

Flat Washer

Qty. 2

Qty. 2

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any parts are missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 5 minutes

Tools Required for Assembly (included): Wrench

NOTE: You must follow all steps to properly assemble the firepit. Make sure the gas valve is turned "OFF" before assembling. Do NOT attempt to assemble without proper tools.

ASSEMBLY INSTRUCTIONS

1. Place cushions (AA) onto threaded part of handle (D). Insert handle (D) into holes on top of the lid (A).


Hardware Used



Cushion



x 2



2. From underside of lid (A), place spring washer (BB) and then flat washer (CC) onto threaded part of handle (D). Secure with M6 nut (DD), tightening with wrench (E).

Hardware Used



Spring Washer



x 2



Flat Washer



x 2



M6 Nut




x 2


3. Place pumice stones (C) into body (B).



A CAUTION

The screen in this firepit MUST be clear and free of obstructions at all times to ensure proper operation. Make sure the firepit is covered completely with pumice stones lest the flame extinguish occasionally.









ASSEMBLY INSTRUCTIONS

4. Place 20 lb. propane gas tank (not included) on top of the tank holder (F). Turn the preassembled wing screw on the tank holder (F) clockwise to secure the propane gas tank.




5. To install the propane gas tank to the body (B), first turn the cylinder valve on the propane gas tank clockwise to close the gas supply on the propane gas tank. Then, screw the regulator coupling from inside the body (B) onto the valve clockwise by hand only. Make sure it is fastened securely.

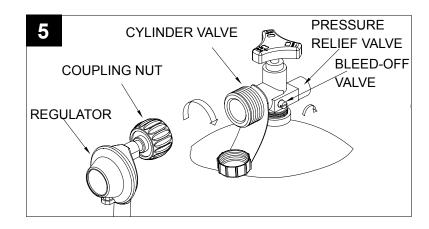

6. Cover body (B) with lid (A). To lock lid (A) in place, turn clockwise. To unlock, turn counterclockwise.

6



7