




ZTR6203-EWS-HW

0.5 gpf Sensor Operated Urinal Flush Valve

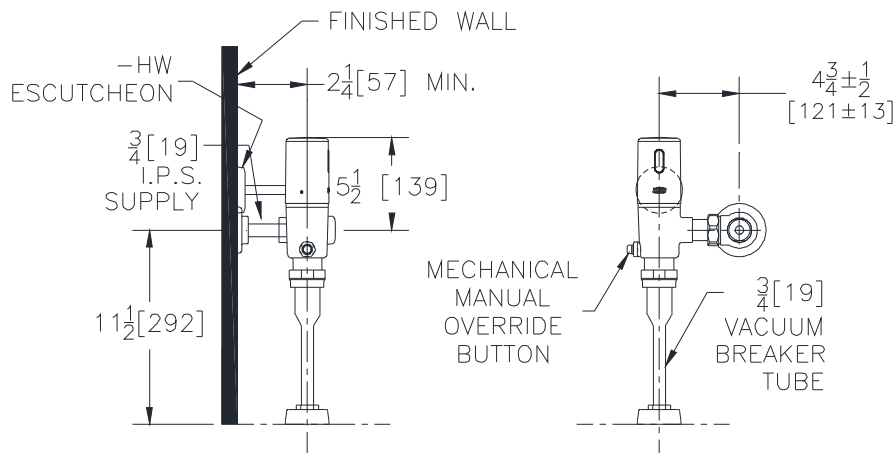

Suffix Options (Check/Specify Appropriate Options)

- | | |
|--------------------------------|-------------------------|
| <input type="checkbox"/> -YJ | Split Ring Pipe Support |
| <input type="checkbox"/> -YK | Solid Ring Pipe Support |
| <input type="checkbox"/> -YO | Bumper on Angle Stop |
| <input type="checkbox"/> _____ | Other |

Accessories (Order separate as specified)

Compatible with -HW Version:

P6900-ACA-BA 7.6VDC Plug-In ACA Power Supply

Powers up to 4 valves

P6000-HW6 7.6VDC Hardwired Power Converter

Powers up to 8 valves

Others:

P6800-PJB-4 Power Junction Box (4 outputs)

P6800-PJB-8 Power Junction Box (8 outputs)

P6800-EXT 10' Extension Cable with Connectors

NOTE: Performance guaranteed with Zurn EcoVantage® fixtures. Please consult Zurn Technical Services at 1-800-997-3876 to discuss the paired performance of this valve with other manufacturers fixtures.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION

5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

PHONE: 1-800-997-3876 ♦ FAX: 919-775-3541

WWW.ZURN.COM

IN CANADA: ZURN INDUSTRIES LIMITED

7900 GOREWAY DRIVE UNIT 10 ♦ BRAMPTON, ONTARIO L6T5W6

PHONE: 905-405-8272 FAX: 905-405-1292

AquaSense® is a registered trademark of Zurn Industries, LLC.

ENGINEERING SPECIFICATIONS

Exposed chrome plated flushometer valve with a polished robust metal cap exterior.

- Hardwired using 7.6VDC Power Supply
- Filtered Piston Kit
 - Chloramine resistant
- Proprietary DR resistant low lead brass alloy
- Actuator
 - Sensor powered
- Mechanical Manual Override Button
- Includes 10' power supply cable
- Control Stop
 - Internal siphon-guard protection
 - Vandal resistant stop cap
 - Sweat solder kit
 - Cast wall flange with set screw
- Vacuum Breaker
 - High back pressure
 - One piece hex coupling nut
- Internal seals
 - Chloramine resistant
- Adjustable tailpiece
- Spud coupling and flange for top spud connection



* This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.