

GDA

INSTALLATION INSTRUCTIONS

These requirements cover quick-connect type fittings with a maximum working pressure of 250 psig. They are intended for installation and use in accordance with the LP-Gas Code, NFPA 58.

OPERATING INSTRUCTIONS

To connect: push back FIX RING of socket. (Fig.1)


Insert Plug (FIG.2) and release sleeve.

Push Plug until FIX RING snaps forward locking Plug in Socket (FIG.3)

(This will turn on Gas automatically.)

To disconnect: Push FIX RING back and pull out Plug.

(This will turn off Gas automatically.)

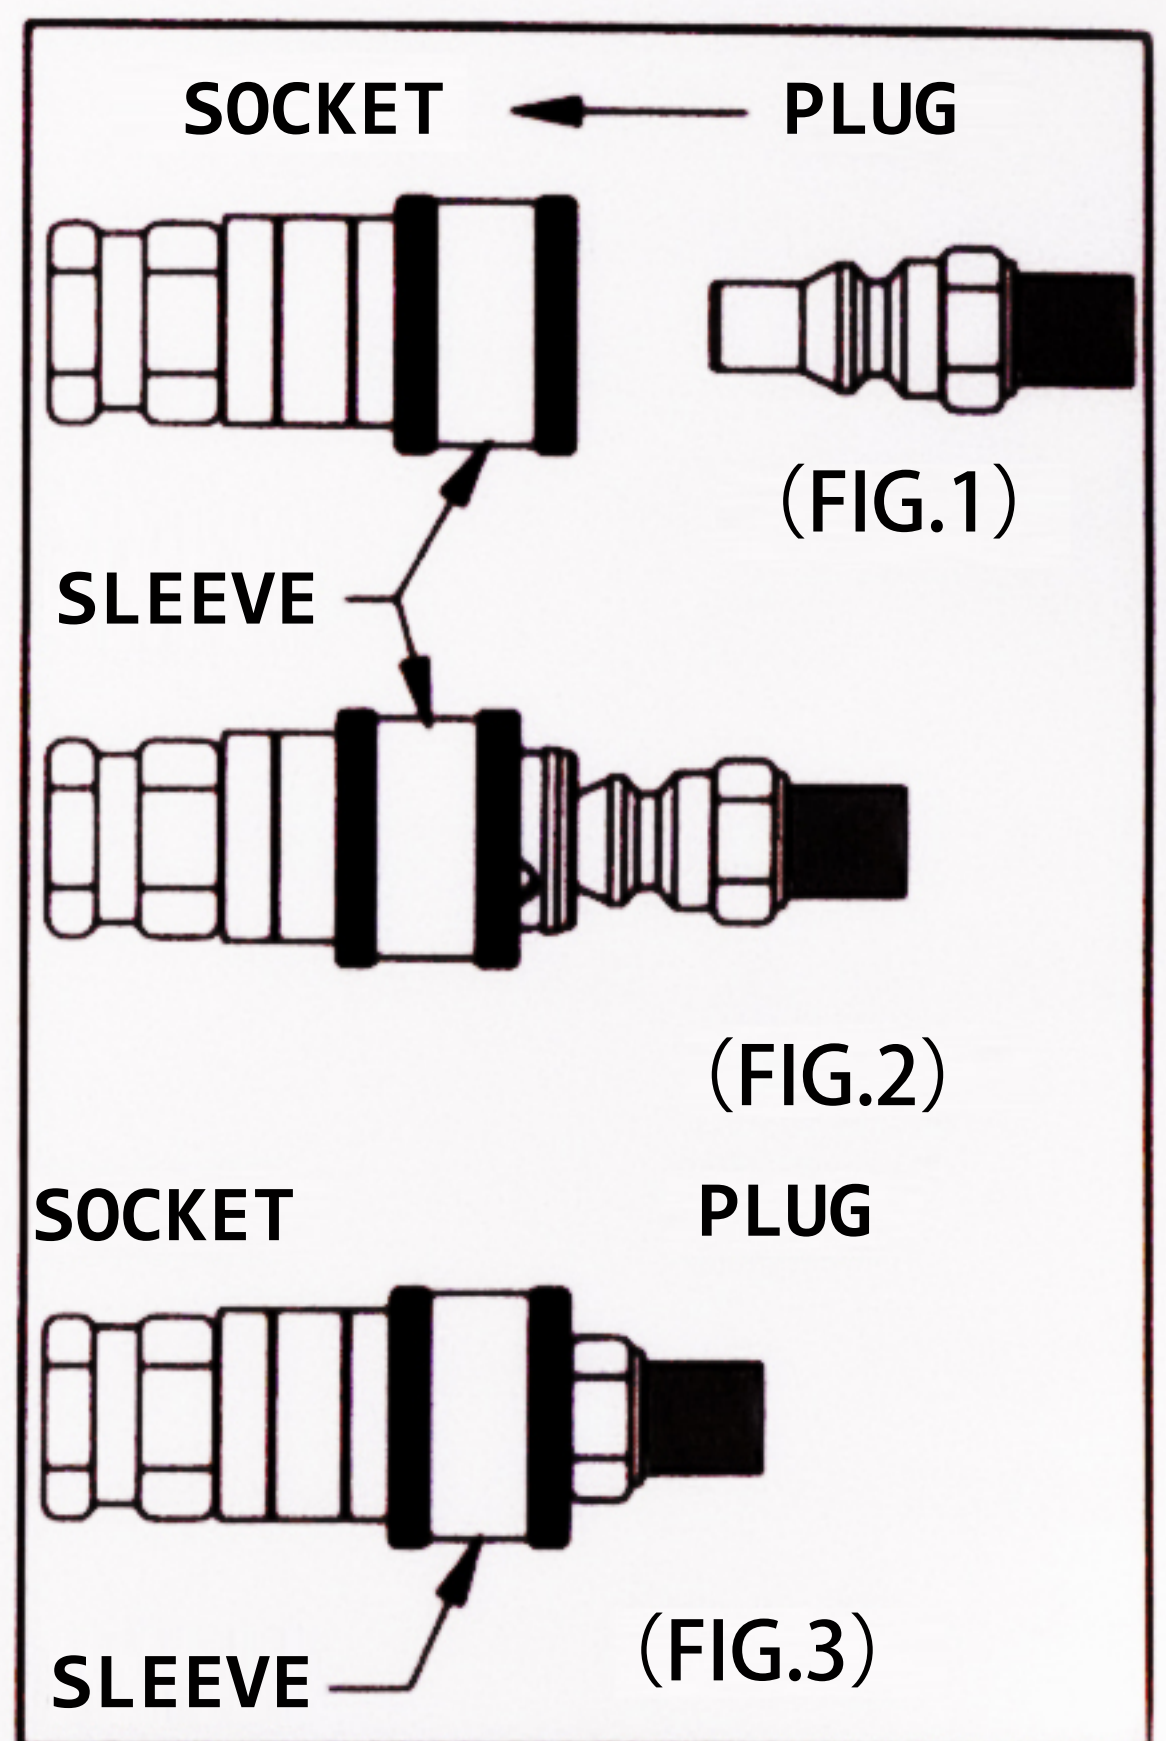

IMPORTANT