





- Inspect the wire insulation for any cuts, abrasions or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.





















If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com * PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

HARDWARE INCLUDED













Mounting Unit


Screws

Rubber Rings

Mounting Screws


Wire Nuts

EXPLODED PARTS




INSTALLATION STEP 1


Unscrew the rubber rings and screws from the mounting unit. Use the mounting screws to attach the mounting unit to the junction box(not included).

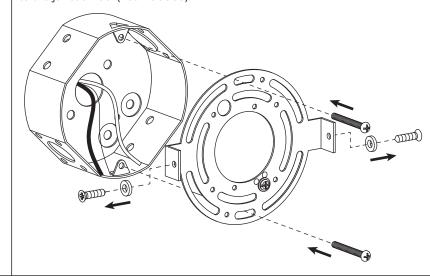


STEP 2

Make the electrical connection from the junction box (not included) to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied wire nuts. Secure with electrical tape.

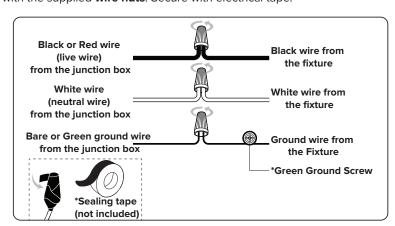



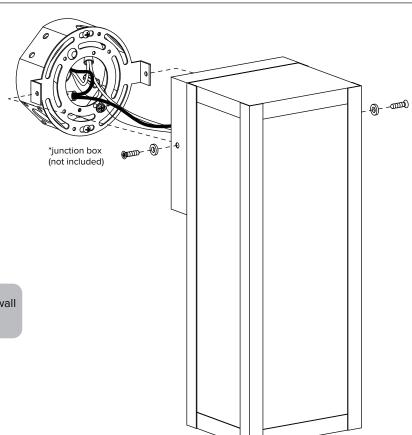

STEP 3

Attach the **fixture** to the **mounting unit** through **screw holes** as shown, and secure it with **rubber rings** and **screws**.

NOTICE: Please use caulk in the back plate and wall mounting surface to prevent water from entering.

STEP 4 Install bulb (not included).

