

Features

- Offset Pivot Hinge Door & Inline Panel
- Pull knob
- 3/8" (10 mm) thick tempered glass available in Clear
- 6" adjustment range provides increased plumb and level tolerance
- Anodized aluminum hardware prevents rusting or corrosion
- Available in 76" height and five widths

Applicable Codes/Standards

Specified model meets or exceeds the following:

- ASTM C1464-06 and ASTM C1048
- Safety criteria CPSC16 CRF 1201 categories 1 & 2 and ANSI Z97.1
- SGCC Certification required.

**Glass Option**


- 3/8" Clear (CL) door, 1/2" Clear (CL) panel

Frame Options

- Polished Chrome (PC)
- Brushed Nickel (BN)
- Oil Rubbed Bronze (OB)

Installation Notes

Install this product according to the installation guide.

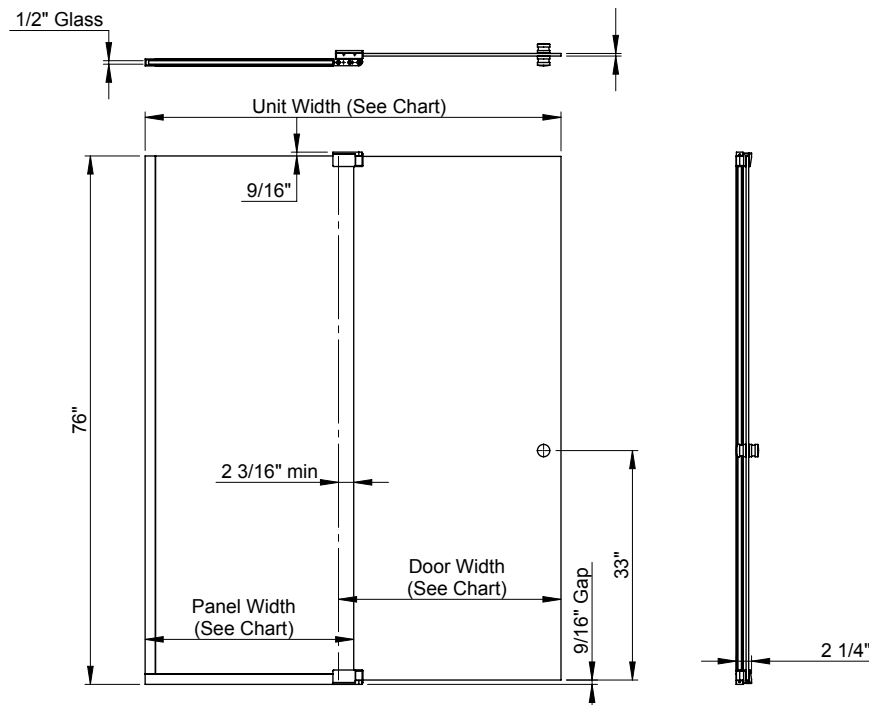

GLASS SIZING CHART		
Unit Width Ranges	Glass Size (Inches) / Weight (lbs)	
	Door (3/8")	Panel (1/2")
32" - 36"	30" X 75 7/16" - (80.11 lbs)	8" X 75 7/16" - (28.46 lbs)
36 1/16" - 42"	30" X 75 7/16" - (80.11 lbs)	14" X 75 7/16" - (49.85 lbs)
42 1/16" - 48"	32" X 75 7/16" - (85.46 lbs)	18" X 75 7/16" - (64.09 lbs)
48 1/16" - 54"	30" X 75 7/16" - (80.11 lbs)	26" X 75 7/16" - (92.58 lbs)*
54 1/16" - 60"	32" X 75 7/16" - (85.46 lbs)	30" X 75 7/16" - (106.82 lbs)*
* Panel requires support bar		