


Item Number: 17810

WARNING (To reduce the risk of fire, electric shock, or injury to persons):


1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the **"OFF"** position. B). Place the wall switch in the **"OFF"** position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.
10. Do not touch the bulb or lamp shade during the lighting fixture working.

Image for the finished product:

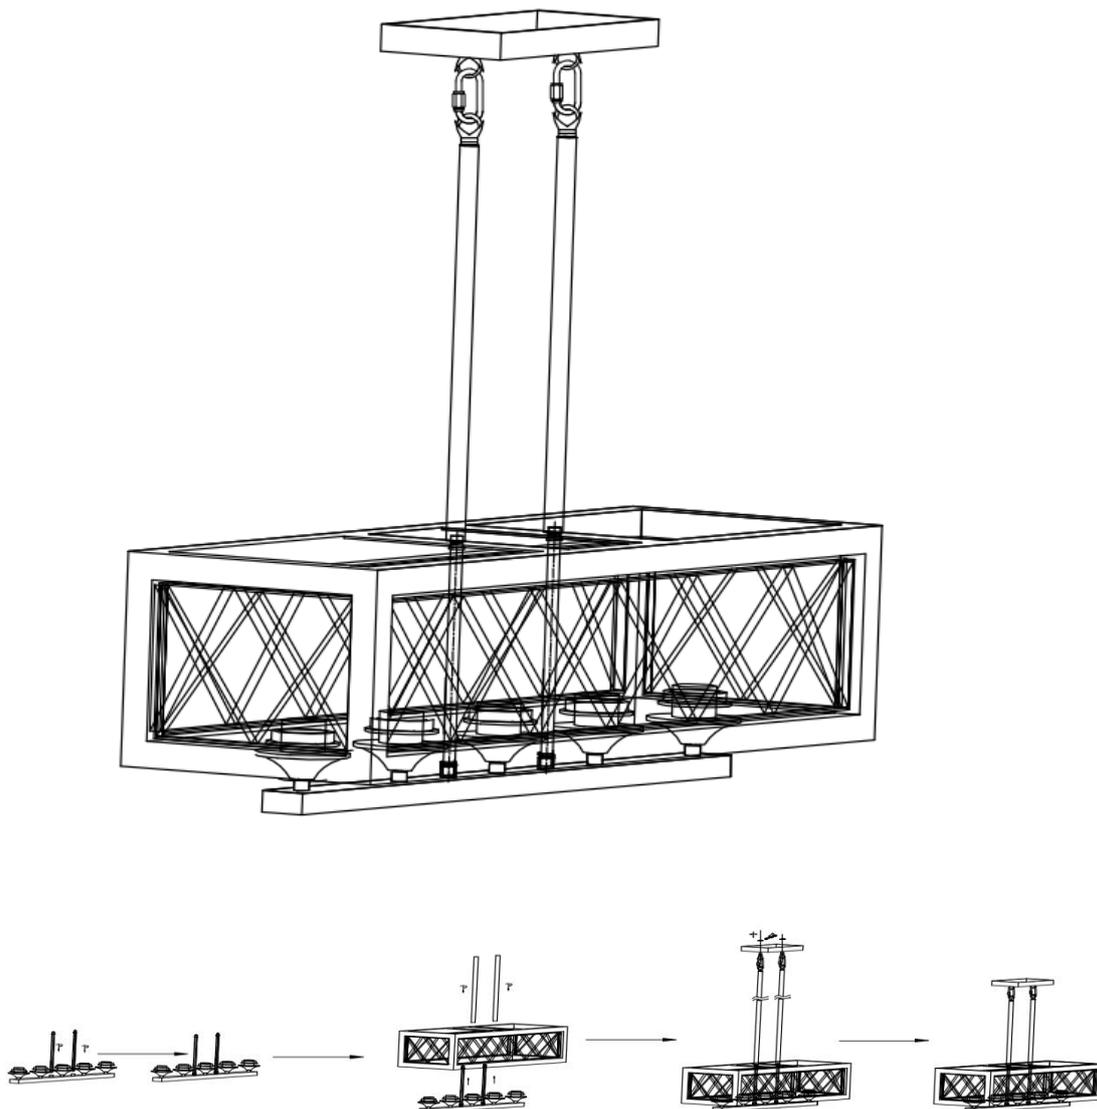

Installation Procedures:

1. Open the package and take out all the parts or accessories, then place them on a clean flat place.
2. Turn off power at the circuit box to avoid possible electric shock.
3. Assemble the light fixture as below procedure:
4. Fix two straight tubes 2 to part 1 on the bar.
5. Fix tube 2 to the hole 10 on the wood frame 3.
6. Connect tube 4 to tube 2 through hole 10, choose to install ring 5 to straight tube 4 if your house has a sloped ceiling.
7. Fix canopy 6 to the straight tube 4 or ring 5.
8. Fix mounting plate 7 to the Outlet Box of ceiling by screw 8.
9. Connect wires from lamp to the Outlet Box wire by wire connectors 9, more details as below:

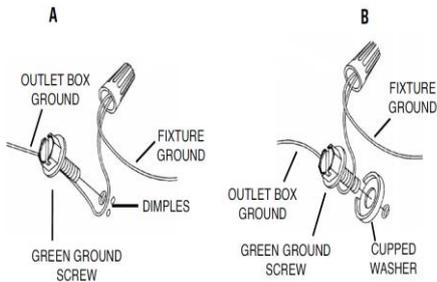

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

Neutral Wire

10. Push canopy 6 upward to the outlet box and secure it with the screw nuts 11 until snug.
11. Fix the glass shade 13 to the lamp base by using the cover ring 12. Then install bulb 14 (not included).
12. Check everything installed correctly, then you can turn on the light.

