


SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:PND4097A

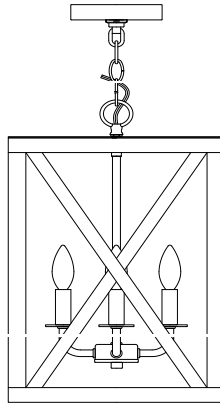

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:20 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	machine screw		2X	F	canopy		1X
B	mounting bracket		1X	G	chain		1X
C	screw collar loop		1X	H	bulb		3X
D	ring		1X	J	Loop		1X
E	wire connector		3X				

Installation

Step 1 Attaching the cross bar to the mounting bracket

Remove the ring (D) and screw collar loop (C) from the preassembled threaded nipple on the mounting bracket(B). Mount the mounting bracket(B) to the junction box with machine screw (A)


Step 2 Attaching the chain

Attach the screw collar loop(C) to the threaded nipple of the mounting bracket(B).Choose the desired length .Use a soft cloth and pliers (none included) to avoid damaging the finish. Open the top section of the chain(G) and attach it to the screw collar loop(C). Pass the chain(G) through the canopy(F) and ring (D). Then weave the fixture wire and the fixture ground wire from the fixture(I) through the chain (G), ring (D), canopy (F).

Step 3 Wire connection

Make wire connections, with wire connectors(E), following the reference chart listed below.

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Tighten the ring(D) onto the screw collar loop(C) to secure the canopy(F) over the cross bar (B).Open the bottom section of the chain(G) and attach it to the loop (J).

Step 5

Insert the bulbs (H) into the socket.

PLEASE USE TYPE"B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED BULB MAX 9-WATT THERE ARE 3PCS LED 3-WATT BULB IN THE BOX

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP

