


---

**Item Number: 6910660**

**WARNING** (To reduce the risk of fire, electric shock, or personal injury):





1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at a later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
  - A) Go to the main fuse, or circuit breaker, box in your home.  
Place the main power switch in the **"OFF"** position.
  - B) Place the wall switch in the **"OFF"** position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all sides.  
Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **40W** per bulb.
7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

**IMAGE FOR FINISHED PRODUCT:**

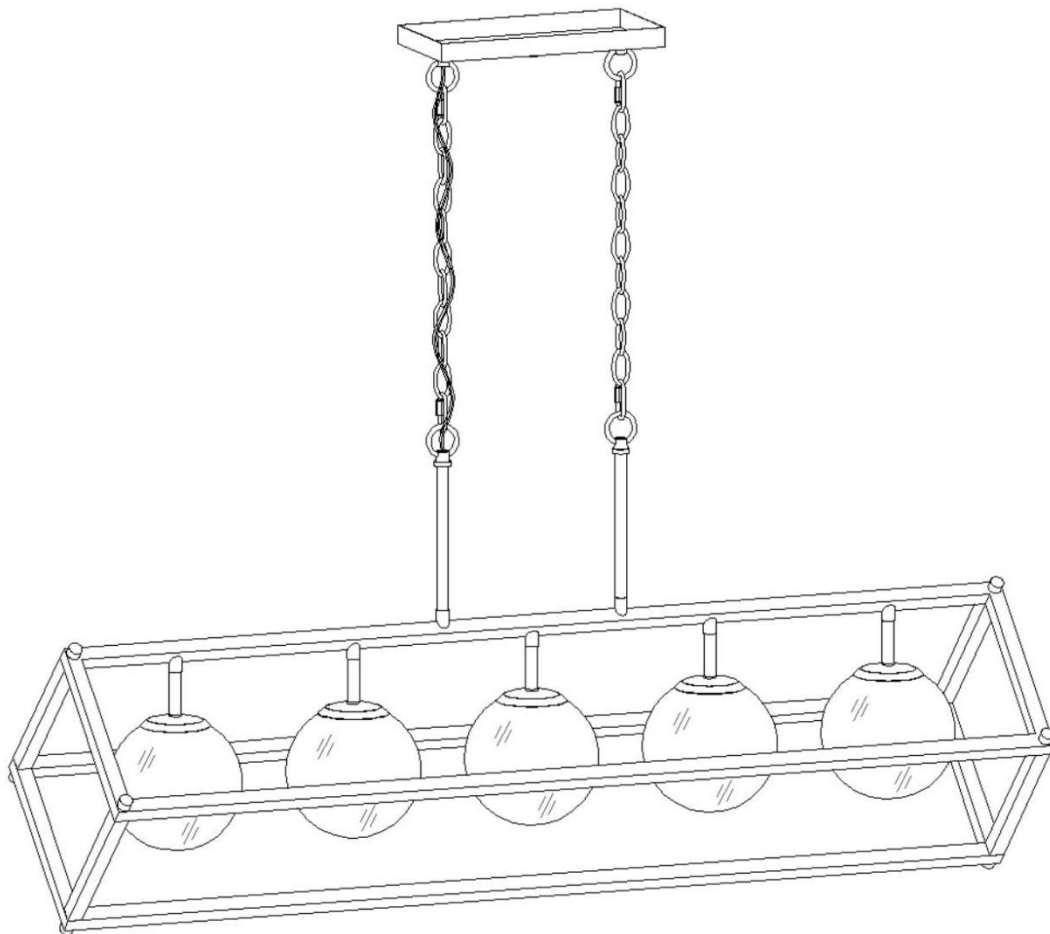

## TOOLS REQUIRED (NOT INCLUDED):

Before starting assembly and installation please prepare the needed tools as below picture

|                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Ladder                                                                            | Phillips head.flat blade screwdriver                                              | Electrical tape                                                                   | Pliers                                                                             | Wire cutter/Stripper                                                                |

## PARTS TYPE & QTY INCLUDING:

- (C) Single bar (1)
- (D) Green ground screw (1)
- (E) Canopy (1)
- (F) Loop (4)
- (G) Hex nut (1)
- (H) Cap nut (1)
- (I) Chain (2)
- (J) Quick link (4)
- (K) Stem (2)
- (L) Fixture body (1)
- (M) Lock nut (8)
- (N) Socket (5)
- (O) Glass shade (5)
- (P) Threaded pipe (4)
- (Q) Lower frame (1)


## ACCESSORIES & QTY ENCLOSED:

- (A) Wire connector (3)
- (B) Mounting screw (2)

## ASSEMBLY & INSTALLATION INSTRUCTIONS:


1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

2. Make pre-installation

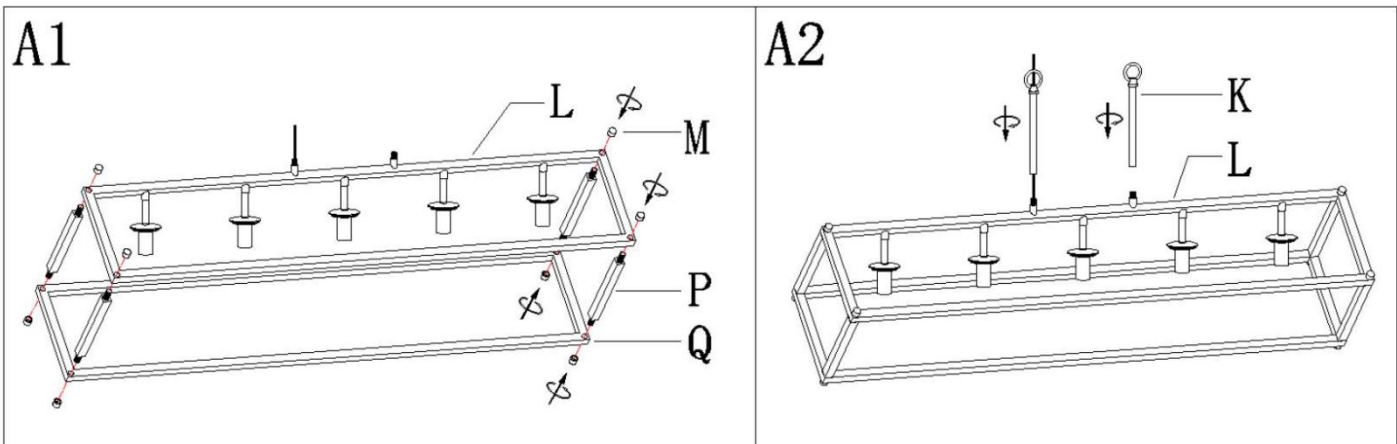

Step A1: Secure threaded pipes (P) onto lower frame (Q) and fixture body (L) with lock nuts (M).

Step A2: Pass fixture wires through stem (K) and screw stems (K) onto fixture body (L).

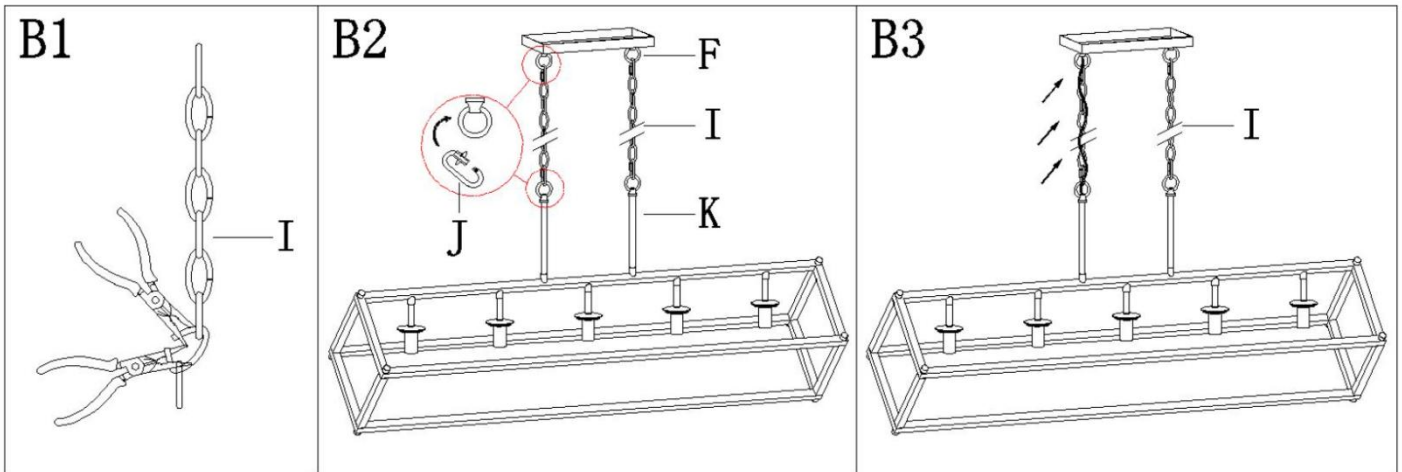

Step B1: By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the unwanted part.

Step B2: Open quick links (J). Attach quick links (J) to loops (F) on canopy (E) and stems (K). Close quick links (J).

Step B3: Carefully weave the fixture wires through chain (I) in and out of every other link and then pass wires through the loop (F) on canopy (E). Gently pull the wires to ensure the wires are not stressed.

### 3. Turn off power


**Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.**

**A) Go to the main fuse, or circuit breaker, box in your home.**

**Place the main power switch in the "OFF" position.**

**B) Place the wall switch in the "OFF" position.**

### 4. Make installation

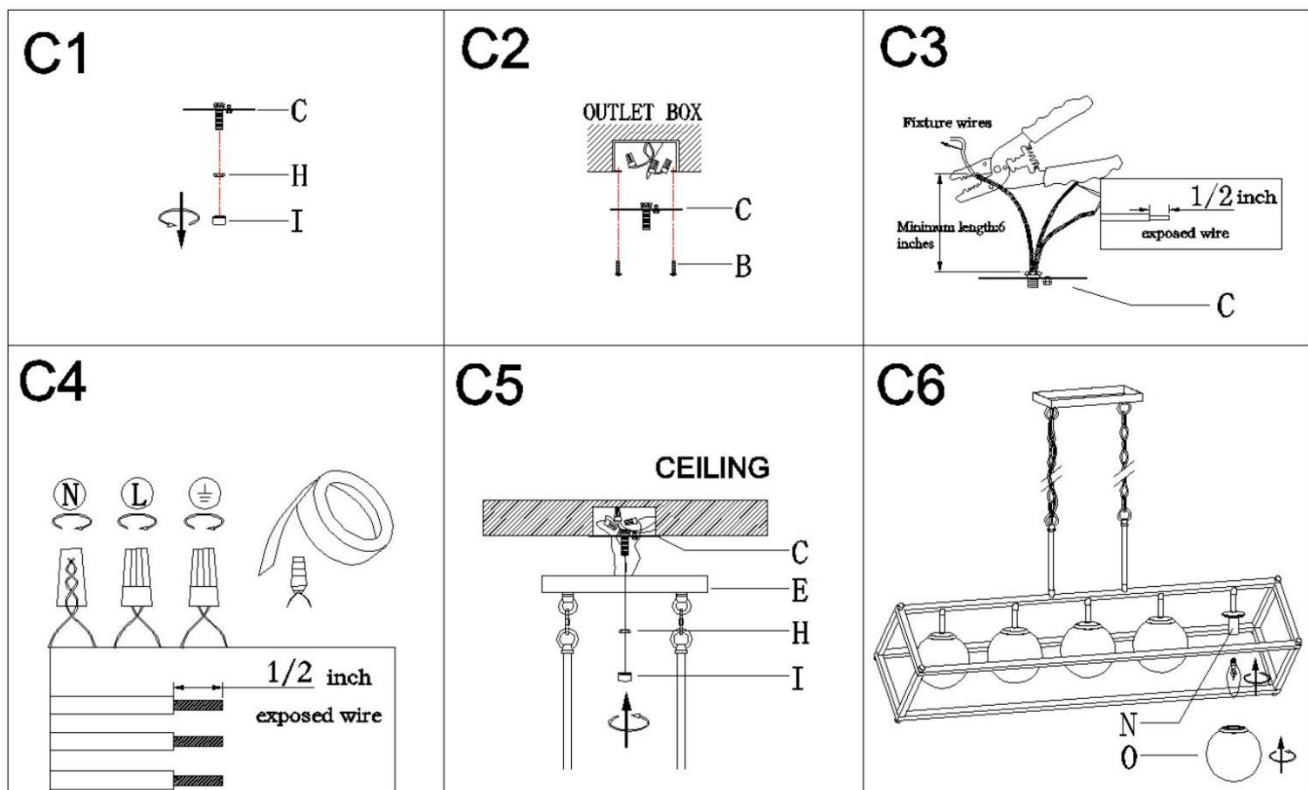

Step C1: Unscrew hex nut (H) and cap nut (I) from single bar (C).

Step C2: Attach single bar (C) to the outlet box with mounting screws (B).


**Note: the side of single bar (C) marked "GND" must face out.**

Step C3: If needed, shorten the length of fixture wires. At this point, the remaining wire length measured above single bar (C) is at least 6".

Step C4: Make wire connections

Connect wires as below wires connection shown. **PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**

Connect ground wires according to the below chart

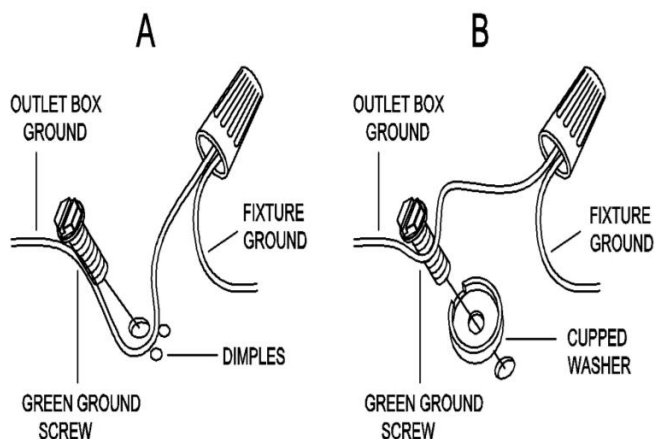

Connect wires according to the below chart

| Connect Black or Red Supply Wire to:                      | Connect White Supply Wire to:                             |
|-----------------------------------------------------------|-----------------------------------------------------------|
| Black                                                     | White                                                     |
| *Parallel cord ( round & smooth )                         | *Parallel cord ( square & ridged )                        |
| Clear,Brown,Gold or Black without tracer                  | Clear,Brown,Gold or Black with tracer                     |
| Insulated wire ( other than green ) with copper conductor | Insulated wire ( other than green ) with silver conductor |

\*Note: When parallel wires ( SPT I & SPT II ) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth ( see illus. )

Neutral Wire

**Twist wires together with plastic wire connectors until tightly joined, and wrap each connector with approved electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.**

Step C5: Raise canopy (E) to the ceiling and secure canopy (E) in place by tightening hex nut (H) and cap nut (I) onto the pre-assembled threaded nipple on single bar (C).

**NOTE: The canopy (E) should be snug against the ceiling and cap nut (I).**

**If not, adjust the threaded length of the pre-assembled threaded nipple on single bar (C) by unscrewing the pre-assembled hex nut and then screwing the pre-assembled threaded nipple in or out of single bar (C) until the secure length is achieved.**

**Tighten the pre-assembled hex nut and back to step C5.**

Step C6: 1) Install bulbs (not included) (Please do not exceed the maximum wattage recommended on the socket.)

2) Screw glass shades (O) onto sockets (N).

**5. Check everything is already installed properly, then you could turn on the light. Enjoy!**

## ORDERING PARTS.

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

## CLEANING.

To clean, wipe the fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.