




INSTALLATION GUIDE

BLAT TOOL RACK

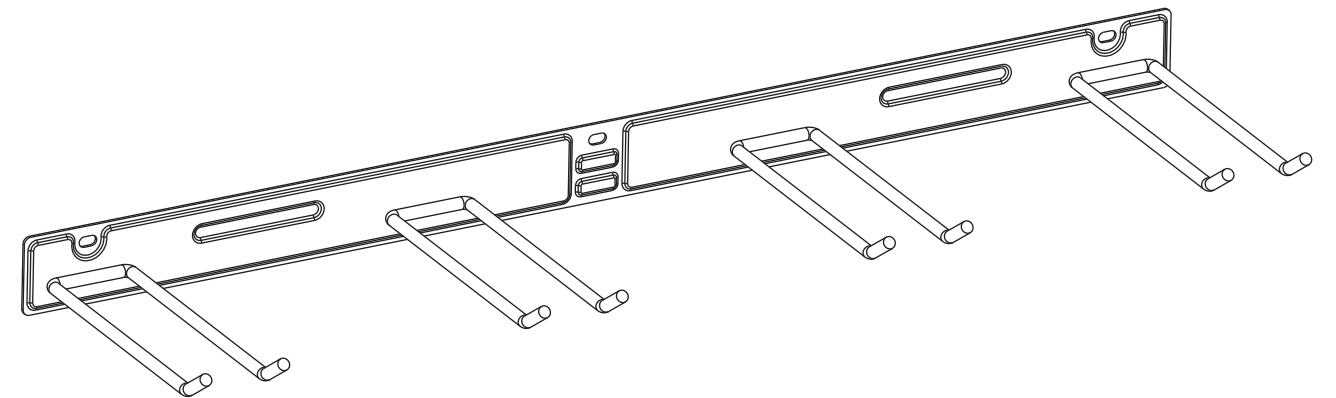

IMPORTANT INFORMATION

BLAT Tool Rack - REV C

Manufactured for Spire LLC in Vietnam

Quantity: 1

WARNING! The BLAT Tool Rack is NOT intended for use by any person under the age of 18 years old. You must be over the age of 18 to install or use the BLAT Tool Rack.

WARNING! Strictly follow all instructions to avoid an accident, damage to property, personal injury or death.

WARNING! Do not use this product for human suspension. Components can fail causing person to fall, possibly resulting in serious injury or death.

WARNING! When operating system, make sure the area below object is clear of persons. If object comes down too quickly, this can cause an accident.

READ THE ENTIRE USER MANUAL BEFORE INSTALLATION

The User Manual you received with your BLAT Tool Rack provides instructions on how to install and use your BLAT Tool Rack. The instructions are written for a person with a basic understanding of tools and procedures. Read the entire manual before proceeding. If you do not understand any portion of the instructions, do not attempt installation, and email info@storeyourboard.com.

CORRECTLY INSTALL THE PRODUCT

Read and follow all instructions carefully.

Failure to properly install and use the BLAT Tool Rack could allow the product to detach from the wall, injuring persons or personal property in the process. Accordingly, it is critical that the BLAT Tool Rack be installed correctly and according to the instructions in the User Manual.

USE TOOLS SAFELY

The procedures in the User Manual may require climbing ladders and/or operating power tools. Make sure you are familiar with these tools and their safety procedures before attempting to use such tools during installation. Always be aware of electrical wires during installation. Failure to do so could result in an electrical shock or death.

WARNING!

Contact with wires can give you a severe electrical shock, which may cause injury or death. If you do not know where wires are, have the work done by an experienced professional.



IMPORTANT INFORMATION

CAUTION

It is the consumer's responsibility to install this system in accordance with all codes, ordinances, and local regulations.

When installing the BLAT Tool Rack, it is the consumer's responsibility to ensure the structural integrity of the structure it is being mounted to.

The BLAT Tool Rack is intended for the storage of tools only. Do not use it for any other purpose.

This system has a maximum capacity of 250 lbs. Overloading the system could result in damage to property or injury.


Use extreme caution when loading and unloading equipment from this system.

It is the consumer's responsibility to ensure that the system is in proper working condition before loading objects onto the system. Check tightness of all bolts and screws periodically. Failure to properly maintain the system could result in damage to property or injury.


WARNING AND DISCLAIMER

Spire LLC (d/b/a StoreYourBoard) expressly disclaims any and all liability for personal injury, property damage or loss, whether direct, indirect, incidental, resulting from the incorrect mounting, improper use, inadequate maintenance, or neglect of this system.

INSTALLATION

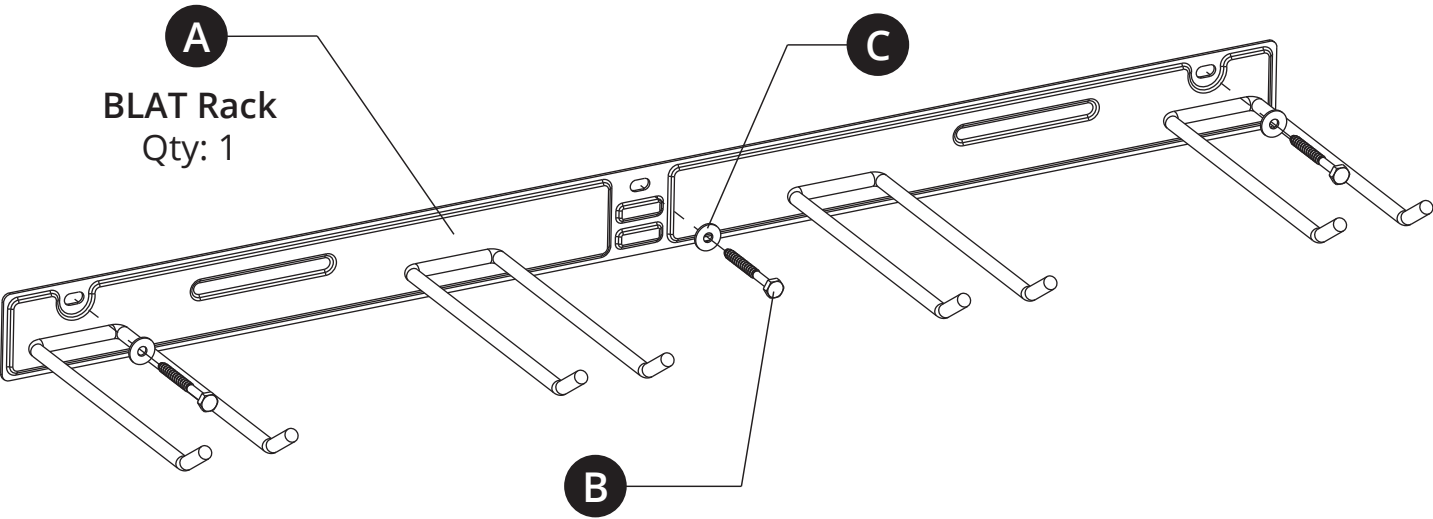

INCLUDED HARDWARE:

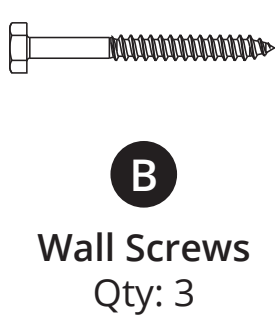

RECOMMENDED TOOLS:

- Drill/Driver
- Drill bits
- 12mm Socket/Driver
- Level
- Tape measure
- Pencil
- Stud finder

WEIGHT LIMITS:

- 250 lbs. max
- 75 lbs. max per outside hooks
- 50 lbs. max per inside hooks

NOTE: The BLAT rack must be mounted to studs to achieve the advertised weight limit

1 Step 1: Mark Stud Locations

- Use a stud finder to locate three adjacent wall studs where you want to mount the rack.
- Mark the stud locations with a pencil for reference.

2 Step 2: Position and Level the Rack

- Hold the BLAT Rack (A) against the wall, aligning the mounting holes with the marked stud locations.
- Use a level to ensure the rack sits flat to the ground and trace the locations of the mounting holes along the studs with a pencil.

3 Step 3: Drill Pilot Holes

- Use a 3/16 inch (4.7mm) drill bit to carefully drill pilot holes into the stud at the marked locations, aiming for the center of the slot that was traced previously.

4 Step 4: Attach the BLAT Rack

- Insert the Wall Screws (B) with Machine Washers (C) into the pilot holes to mount the rack.
- Securely tighten the Wall Screws (B), using a level to ensure the rack sits level to the floor.
- **(Optional)** If mounting outside near salt water, spray the hardware with rust preventative periodically.

