# Wall-mount bathroom sink faucet, 1.2 gpm K-97358-4



#### **Features**

- A single handle controls both on/off activation and temperature setting
- 8-1/4" (210 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with other products in the Avid collection

#### Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

## Installation

Wall-mount

## **Recommended Products/Accessories**

K-97494 18" towel bar

K-97495 24" towel bar

K-97496 24" double towel bar

K-97498 towel arm

K-97499 robe hook

K-97500 double robe hook

K-97502 Vertical toilet paper holder

K-97503 Covered toilet paper holder

## Optional Products/Accessories

K-7107 Decorative Drain

K-7108 Decorative Drain

K-7114 Pop-Up Drain

K-7114-A Pop-Up Drain

K-7127 Drain

K-7127-A Drain

K-7129 Drain

K-7129-A Bathroom sink grid drain with overflow

K-33151 Clicker drain without overflow

K-25322 Clicker drain with overflow

## **Included Components**

1322337 Single-control wall-mount valve





#### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

**IAPMO** Certification

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


## **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne
		Brass





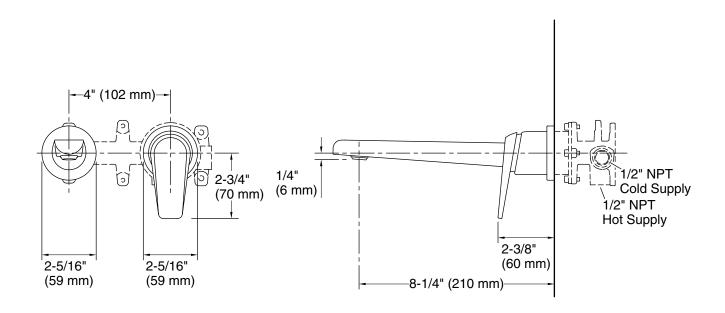

## **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Drain included: No

Spout:

Spout reach: 8-1/4" (210 mm)

## **Notes**

Install this product according to the installation instructions

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

