For Style 5078C24C Assembly Instruction Sheet #IS-5078C24C

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (10) E12 60W Maximum (Not include).


Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement

Warnings and Cautions

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. Tum off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

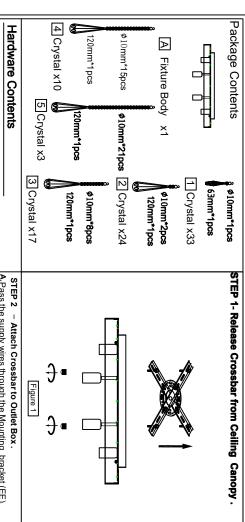

A. Pass the supply wires through the Mounting bracket (EE) Attach the Mounting bracket (EE) to the Outlet Box (CC) Screws (not included) Secure it with Outlet Box with the head of the Green Ground Screw facing you.

8

PART

DESCRIPTION Wire nut

QUANTITY

8


2ხც 2pcs

Tighten until snug.

® 8



Figure 2

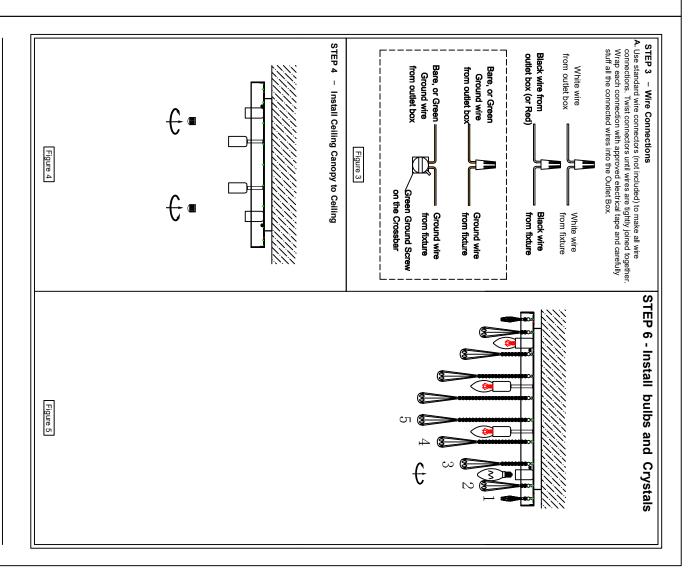

2 of 2