

DS CONTAINERS 211x713 Decoration Layout

WHITE - VISABLE CAN SUBSTRATE - NO PRINT AREA



CARB/CHOKE
& PARTS CLEANER

- ▶ Helps stop hard starting and rough idling
- ▶ Cleans all unpainted metal parts

DANGER: EXTREMELY FLAMMABLE. CONTENTS UNDER PRESSURE.
HARMFUL OR FATAL IF SWALLOWED. VAPOR HARMFUL.
EYE IRRITANT. Read carefully other cautions on back.

NET WT 14 OZ (397 g)

SHAKE CAN THOROUGHLY BEFORE USE
KEEP AWAY FROM BATTERY TERMINALS AND ELECTRICAL CONNECTIONS.

Gum, varnish and dirt build-up may cause hard starting, rough idling, stalling, high exhaust emissions, gasoline waste and loss of pep. Gumout® Carb/Choke & Parts Cleaner cleans off the gum, varnish and dirt quickly and easily.

DIRECTIONS:

SPRAY WITH CAN IN UPRIGHT POSITION. INSERT PLASTIC TUBE FIRMLY INTO VALVE BUTTON. With Engine Off and Cool: Carburetor - Remove the air cleaner and clean the outside of the carburetor and all of the linkage. Avoid spraying electrical connections.

Manifold Heat Control - Spray Gumout® on exposed ends of cool heat riser shaft. Allow to penetrate and clean. Move counterweight up and down until free.

With Engine Running: Carburetor - Spray Gumout® to both ends of the choke valve shaft while working choke by hand. Spray down and around the carburetor throat to remove deposits from the throttle plate area. **DO NOT SPRAY DOWN CARBURETOR THROAT WITH ENGINE OFF. DO NOT SPRAY BELOW THROTTLE PLATE.**

Choke - If choke sticks, remove choke cover and spray.

PCV Valve - Disconnect the crankcase side of the valve and spray Gumout® into the open end of the valve while working the plunger back and forth.

NOT RECOMMENDED FOR FUEL INJECTED VEHICLES.

If sprayed on painted surface, wipe off at once.

50 State VOC compliant.

Will not harm catalytic converters or oxygen sensors; however, avoid spraying oxygen sensors to maintain proper engine operation.

DANGER: Contains acetone, toluene and carbon dioxide. Prolonged and repeated skin contact may cause drying of skin. **PRECAUTIONARY MEASURES:** Do not puncture, incinerate or store above 120°F. Avoid prolonged exposure to sunlight. Keep away from heat, sparks, flames and other ignition sources. Exposure to heat may cause can to burst. Avoid breathing of mists and vapors. Use only in well ventilated areas. Avoid skin and eye contact. Wash thoroughly after handling. **FIRST AID:** If swallowed, do not induce vomiting. Call physician immediately. For eye contact, wash thoroughly with water. If inhaled, breathe fresh air. If not breathing, give artificial respiration. Call physician immediately. Use only as directed. Intentional misuse by deliberately concentrating and/or inhaling can be harmful or fatal. **KEEP OUT OF REACH OF CHILDREN**
FOR HEALTH EMERGENCIES CALL: 1-877-504-9352.

WARNING: This product can expose you to chemicals including Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Made in the USA
of foreign and
US components

Gumout is a TM of Illinois Tool Works Inc.
and/or its affiliates. Distributed by ITW Global
Brands, a division of ITW. Houston, TX 77084.
© 2019 ITW Global Brands. All rights reserved.

FOR TECHNICAL QUESTIONS
OR COMMENTS, CALL
1-855-888-1990
visit us at www.gumout.com



AROUND

DOT 2P M5749 DSC

DOT 2Q M5749 DSC

W: 0.1562 in
H: 0.1562 in


W: 0.1562 in
H: 0.1562 in

W: 0.0938 in
H: 0.0938 in

W: 0.1094 in
H: 0.1094 in

W: 0.0938 in
H: 0.0938 in

W: 0.0938 in
H: 0.0938 in

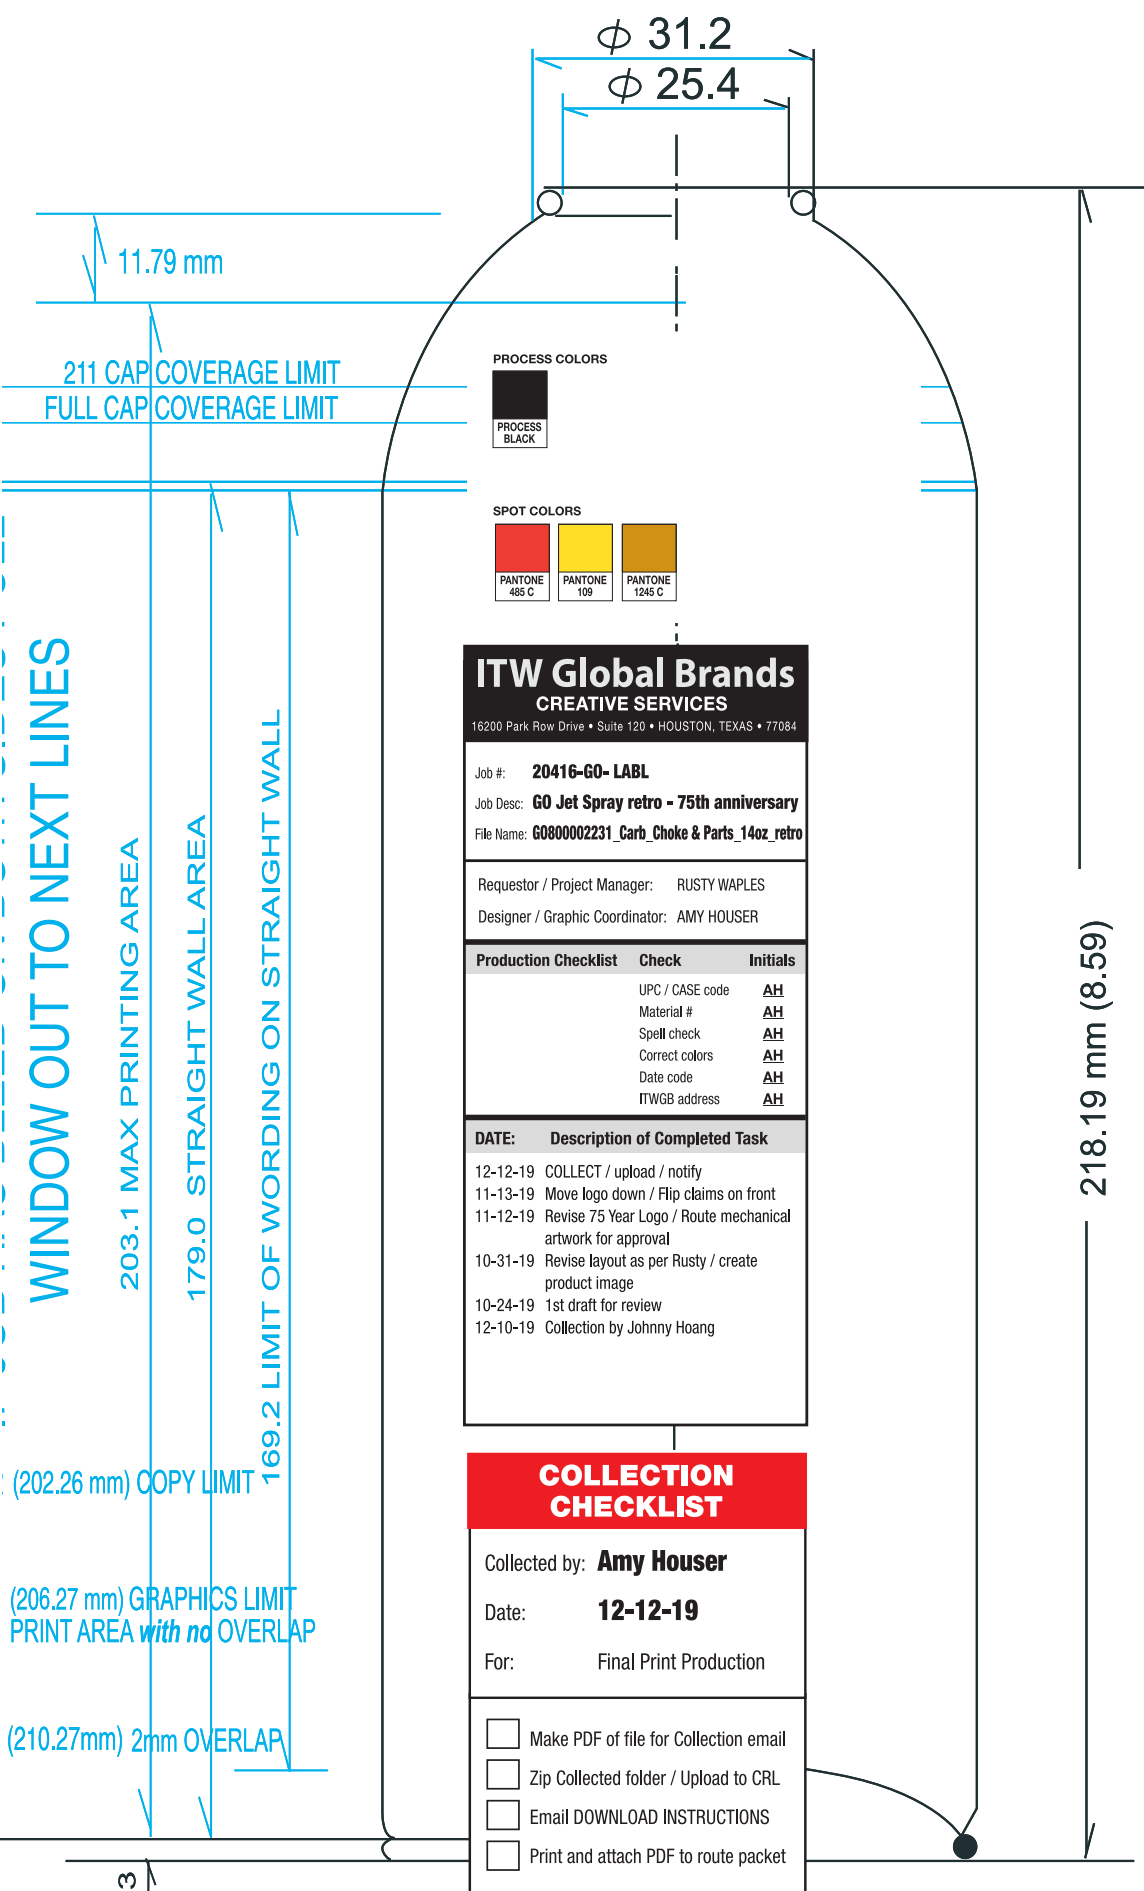

This label Primary Display Panel
= 33.237 square Inches.

Primary Display Panel = 30 + square inches

SIGNAL WORD 15 pt. 5/32" .1562 CAUTION: EYE IRRITANT.
HAZARD TEXT 11 pt. 7/64" .1094 HARMFUL IF SWALLOWED.
OTHER 10 pt. 3/32" .0938 Read carefully other cautions on side panel.

BACK CAUTION 10 pt. 3/32" .0938 Cautionary Back panel text must be this size +

check to indicate text is enlarged on package to 105% to allow for shrinkage