



1; Get through the lamp wire to the canopy and screw the canopy to the short rod. (Use one of the nuts to lock the ground wire E)

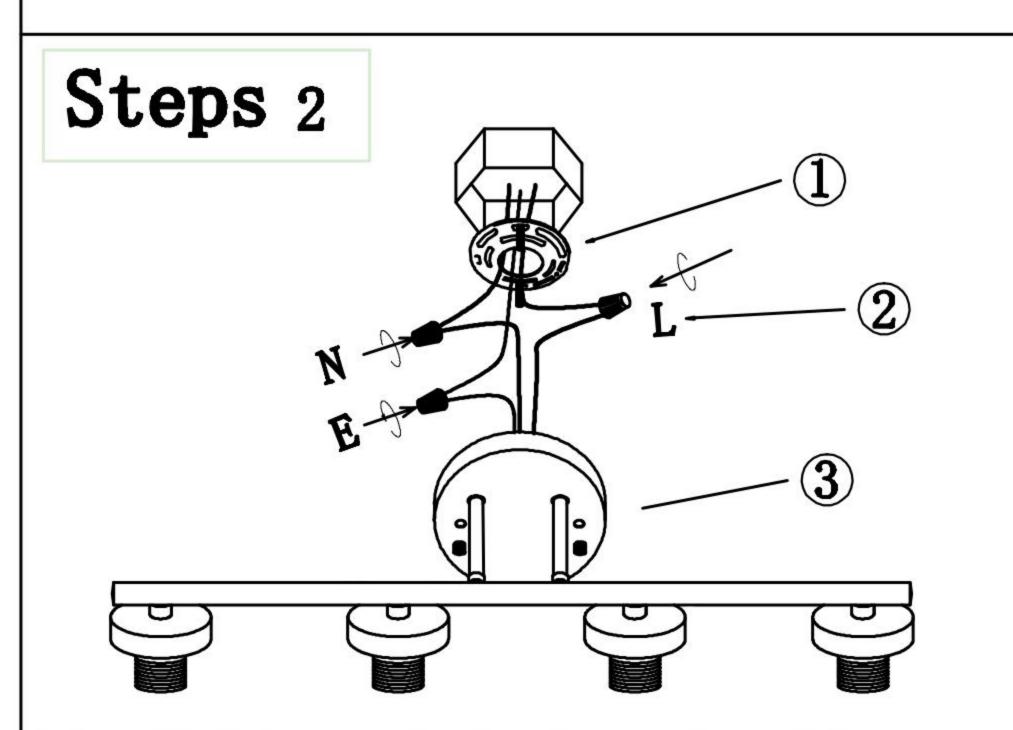

- 1. Assembled the mounting bracket to the ceiling junction box with the screw
- 2. Connect the power cord out from the ceiling junction box to lamp wires with the lead wire and wire nut. according the color to connect. (U.S.-black for "L", white for "N", copper wire for "Ground E")
- 3. Assemble the canopy to the mounting bracket with the screw.

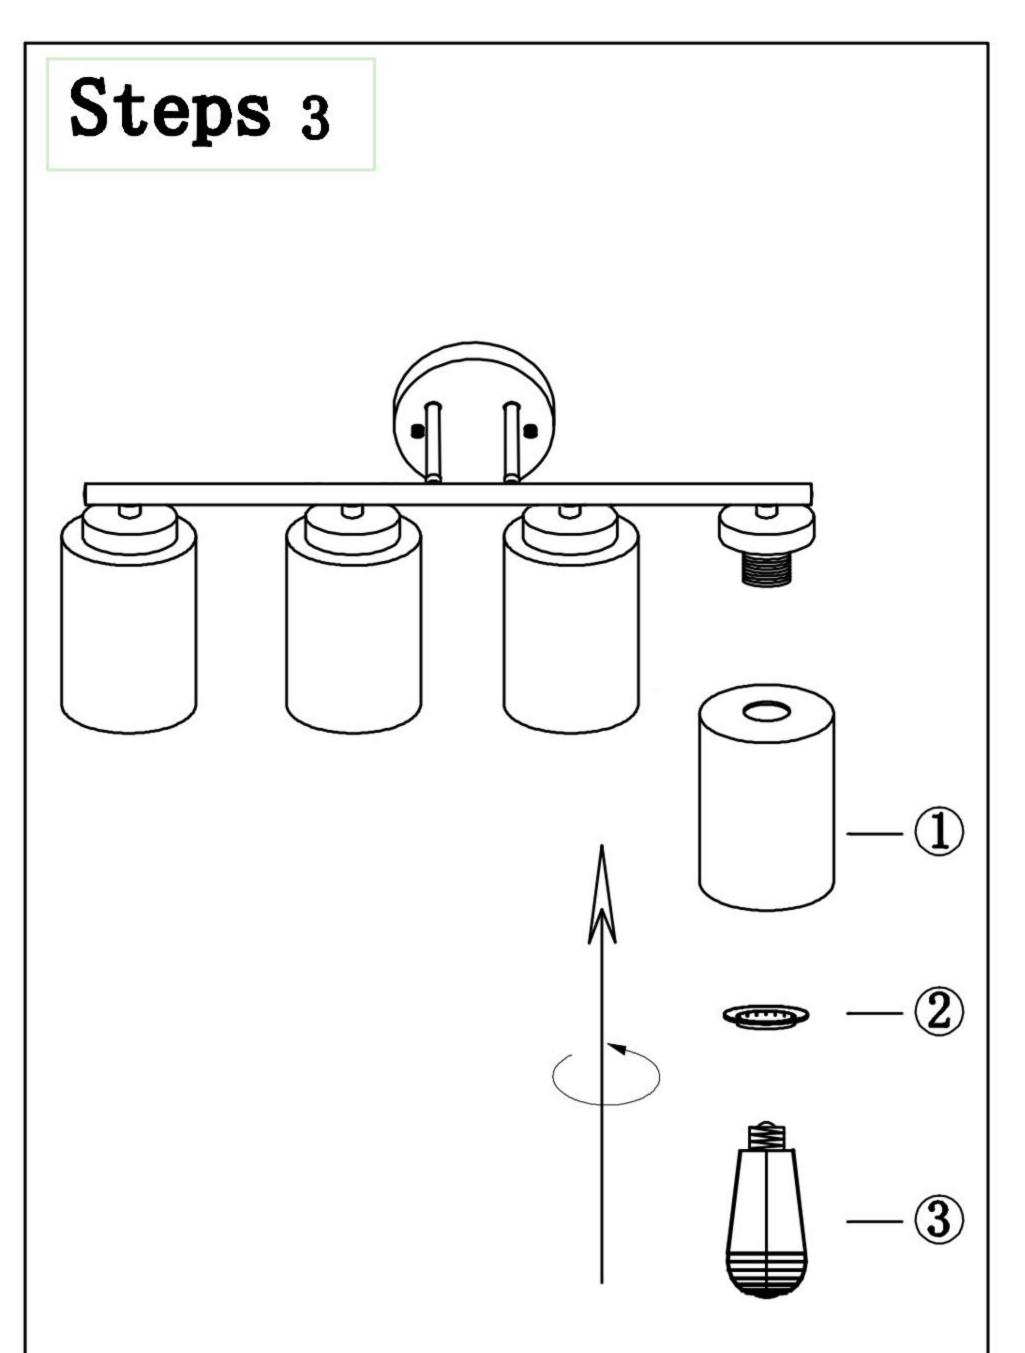

- 1. Install the glass shade.
- 2. Screw the lamp ring.
- 3. Install the light bulb. (bulb not included)