




MODEL: F7-0001

LAVATORY FAUCET INSTALLATION GUIDE

BEFORE YOU BEGIN


- 1) Shut off water supply.
- 2) Carefully inspect waste and supply tubing for signs of damage.
- 3) Replace waste or supply tubing if necessary

TOOLS AND MATERIALS

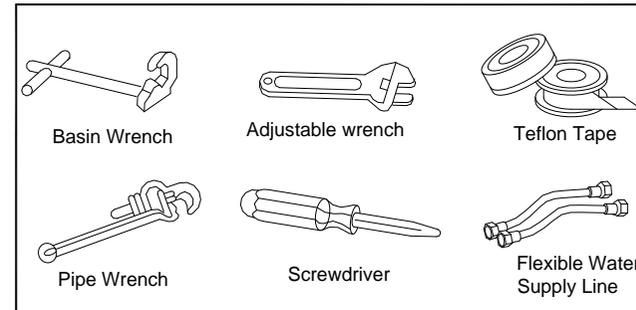


A) FAUCET INSTALLATION

- 1) Set the faucet in place and insert the hoses into hole of deck or lavatory.
- 2) Screw and tighten washer, lock nut onto the shank and secure the faucet

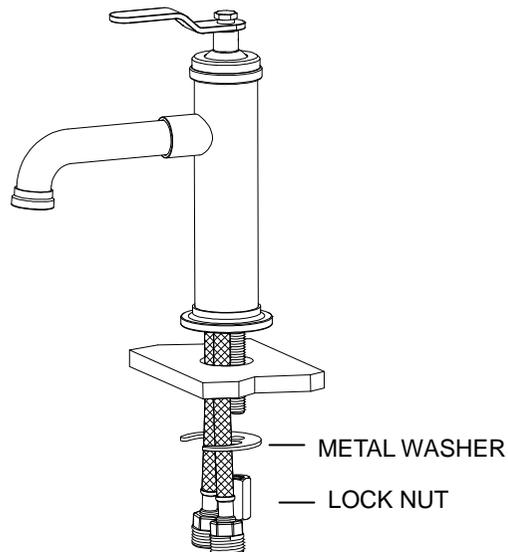

B) SUPPLY CONNECTION


- 1) Apply Teflon tape to faucet inlet shanks and angle stop threads.

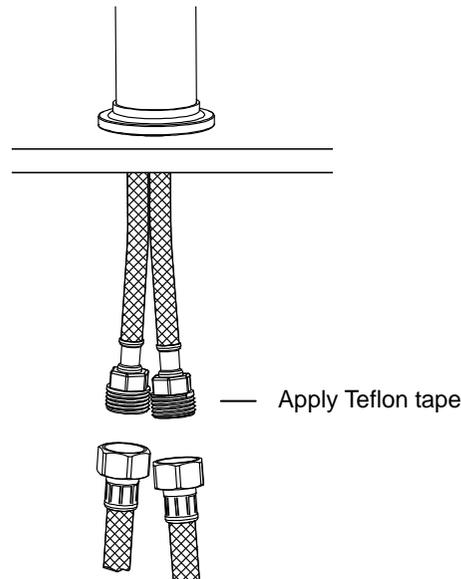

- 2) Connect hoses (not provided) to faucet inlets and angle stops.
- 3) Tighten all connections.


*** VERY IMPORTANT ***

- 4) Flush out water for two minutes before connect hose to faucet valve.
(This act to avoid debris trapped the flow regulator)




C) DRAIN WASTE INSTALLATION

- 1) Disassemble the drain.
- 2) Apply plumbers' putty or sealant to bottom side of flange.
(Or use attached rubber washer to instead of putty)
- 3) Insert drain body through sink.
- 4) Attach the gasket, Teflon washer and tighten the lock nut.
- 5) Apply Teflon tape to the drain pipe threads and screw with drain body
- 6) Remove excessive plumbers' putty or sealant.

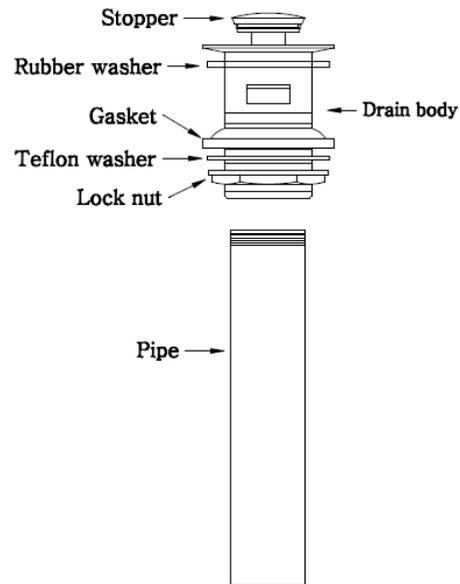

D) INSTALLATION CHECKOUT

- 1) Ensure all connections are tightened properly.
- 2) Turn on main water supply.
- 3) Turn on and off cold and hot water respectively.
- 4) Turn on both hot and cold water and turn off. Check for leaks.
- 5) Remove the aerator with attached key. Check for debris. Clean if necessary.
- 6) Reinstall aerator.

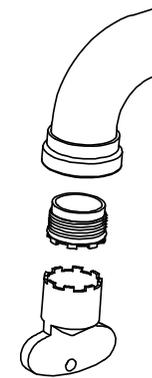

COMPLETE INSTALLATION