
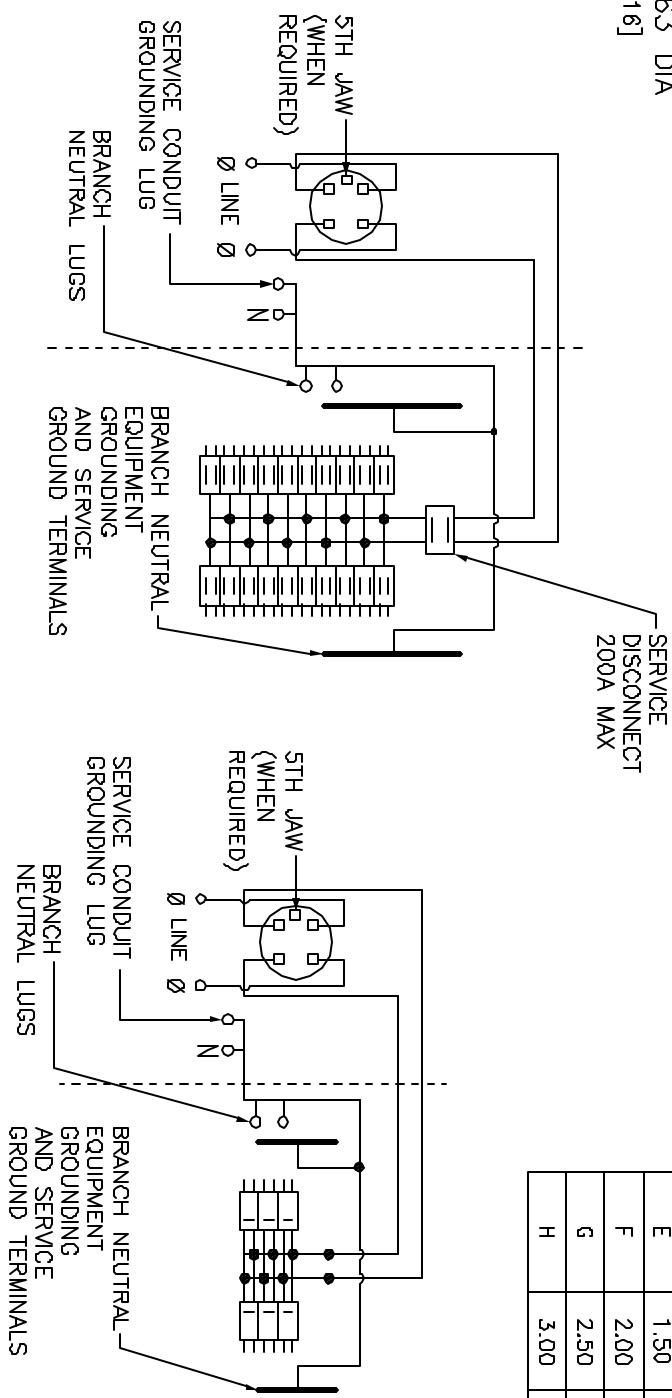


KNOCKOUTS		
SYMBOL	CONDUIT SIZE	
	IN	MM
A	.50	13
B	.75	19
C	1.00	25
D	1.25	32
E	1.50	38
F	2.00	51
G	2.50	64
H	3.00	76

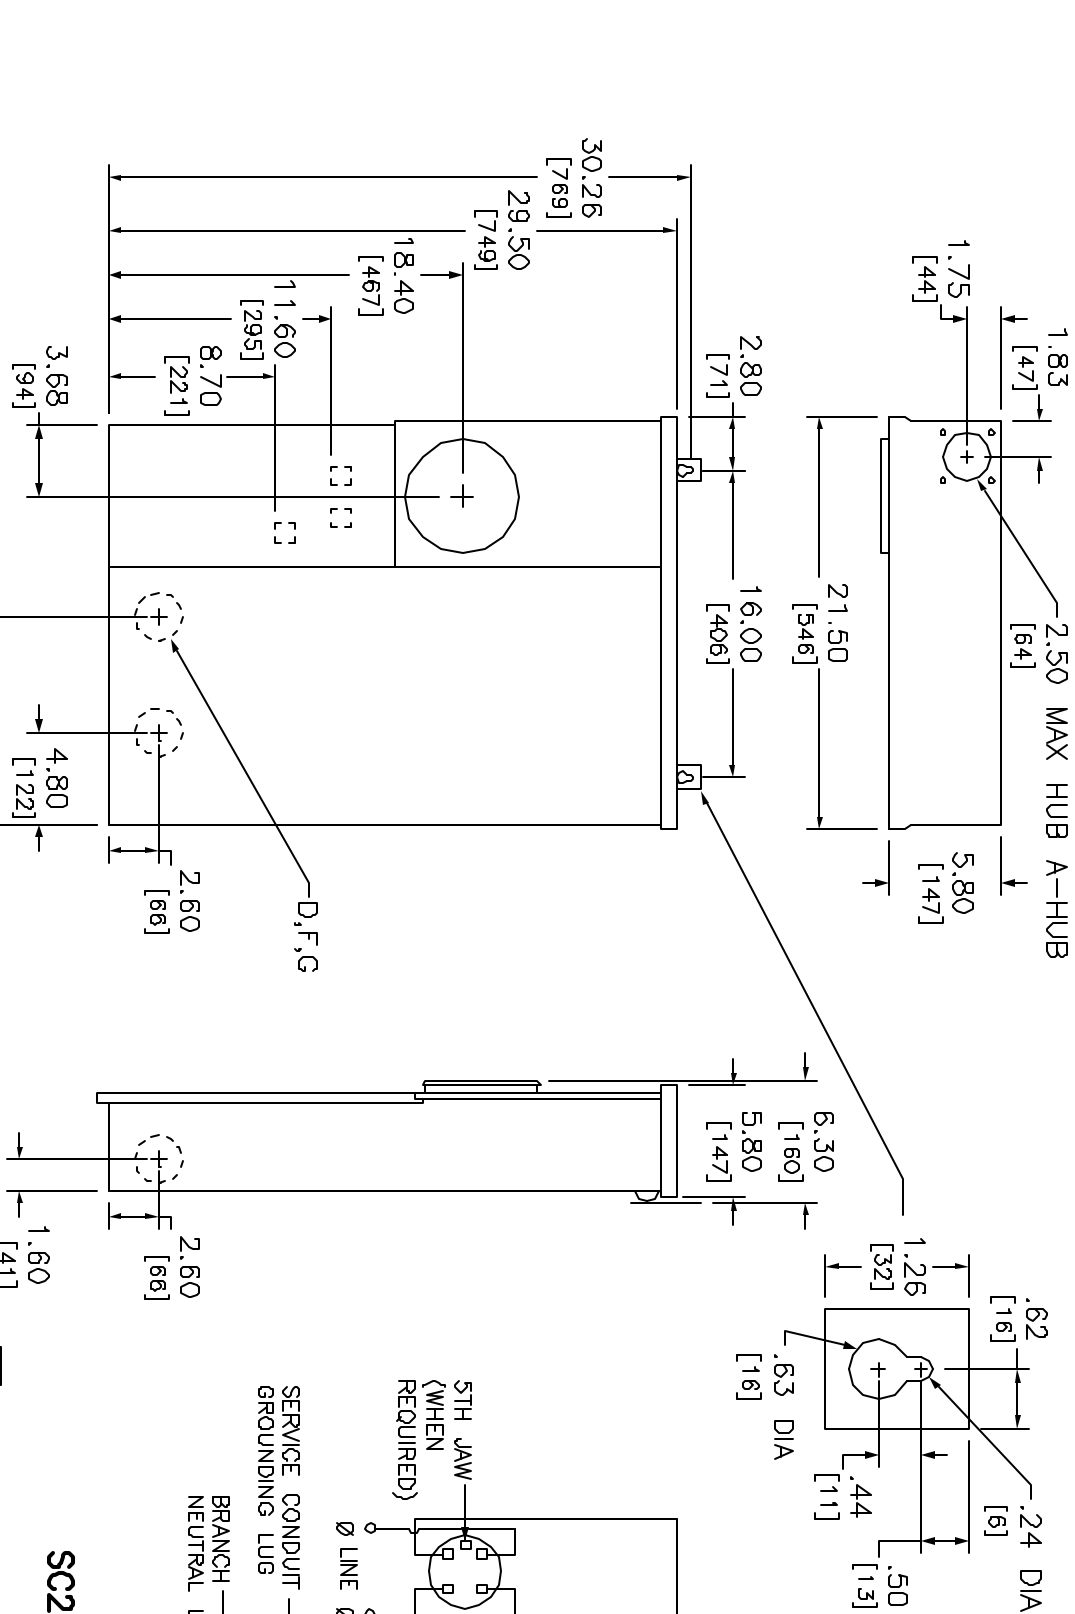

SC2040M2005

TWO SINGLE POLE, ONE PLUG-ON SPACE TYPE HOMT OR ONE SINGLE POLE, TYPE HOM.
TWO POLE TYPE HOM, HOMA OR HOMT (15-110A) MAY PLUG ON TWO ADJACENT SPACES.
TWO POLE TYPE HOMA (150-200A) MAY PLUG ON FOUR ADJACENT SPACES.
USE 15-110A AND 150-200A BRANCH BREAKERS ONLY
TOTAL CIRCUIT BREAKERS HANDLE RATING NOT TO EXCEED 170A PER BRANCH CIRCUIT CONNECTOR.


TWO POLE TYPES HOM OR HOM-A. INSTALL NO MORE THAN SIX CIRCUIT BREAKERS. USE 15-110A AND 150-200A BRANCH BREAKERS ONLY. TOTAL CIRCUIT BREAKER HANDLE RATING NOT TO EXCEED 170A PER CIRCUIT CONNECTOR.

SC12L200S

A SQUARE D UL LISTED SECONDARY SURGE ARRESTER MAY
PLUG ON TWO ADJACENT SPACES. ORDER CATALOG NO.HOM2175SB

DUAL DIMENSIONS:

	INCHES
	MILLIMETERS

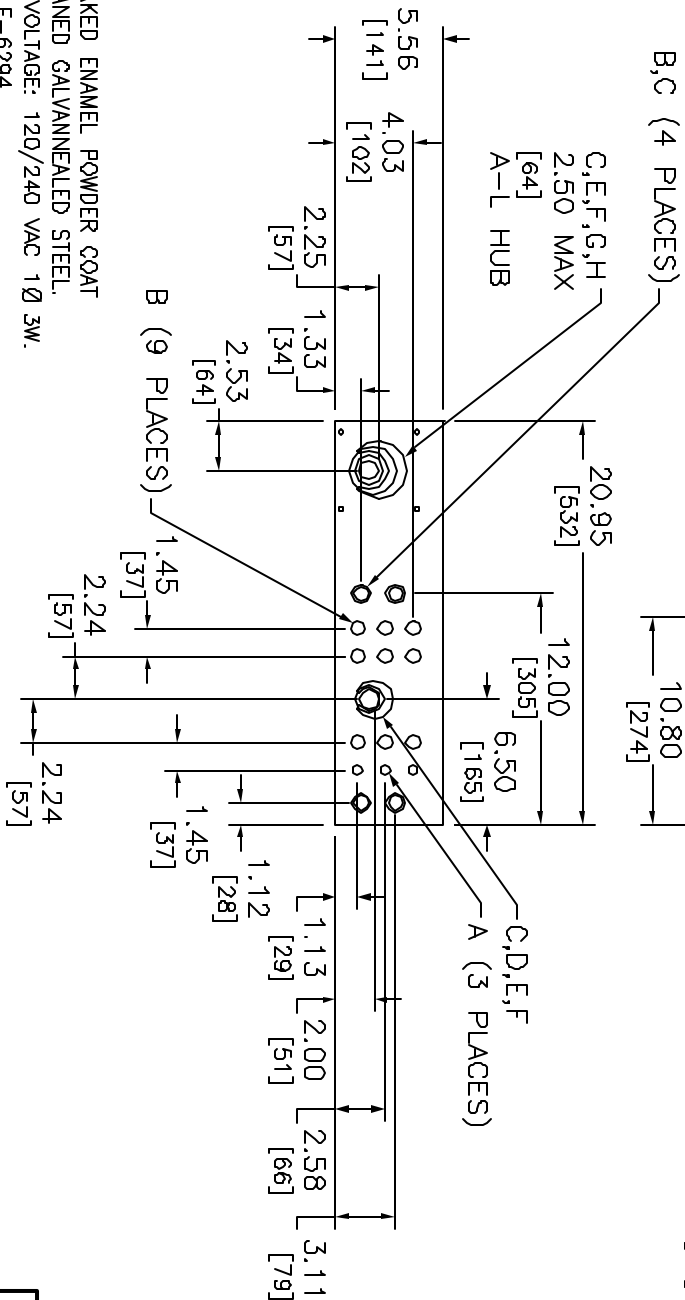

NOTES:
FINISH - GRAY BAKED ENAMEL POWDER COAT
PAINT OVER CLEANED GALVANNEALD STEEL.
MAXIMUM SYSTEM VOLTAGE: 120/240 VAC 1 Ø 3W.
UL LISTED - FILE E-6294
SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
SUITABLE FOR UNDERGROUND/OVERHEAD SERVICE.
MEETS EUSERC SPECIFICATIONS.

AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS (AWG/KCMIL)	LARGE BRANCH NEUTRAL AWG
200	NONE	10K	SC12L200S	MO1	12	SEE ABOVE WIRING DIAGRAM	#4-250 Cu/AL	#4-2/0 Cu/AL
		22K	SC2040M200S		20			

COMBINATION SERVICE ENTRANCE DEVICES
RING TYPE
RAINPROOF NEMA TYPE 3R ENCLOSURE
SURFACE ONLY

DWG# 3189
NO.

