

Please go to [www. quozel. com](http://www. quozel. com) for product cleaning tips. Go to the **Care + Maintenance** selection.

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (4) A19 Medium Base 100W bulb Maximum, Alternate bulb (4) 23W CFL Maximum.

**Estimated Assembly Time:** 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

**Note: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. Refer to respective installation steps for installations.**


### ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

### Package Contents




**A** Crossbar Assembly x 1



**B** Ceiling Canopy x 1



**C** 6" Rod x 2



**D** 12" Rod x 2



**E** Swivel x 1




**F** Hex Nut x 2



**G** Nipple x 1




**H** Big Flat Washer x 1




**I** Small Flat Washer x 1




**J** Lanyard x 1




**K** Lock Ball x 2




**L** Socket Assembly x 1




**M** Shade x 1



**N** Diffuser x 1



**O** Stem x 1



**P** Rubber Washer x 1



**Q** Flat Washer x 1



**R** Finial x 1



**S** Replacement Crystal Drop x 2

### Assembly Instructions for Pendant Light (Step 1A - Step 8A)

#### STEP 1A - Attach Socket Assembly to Shade

- Carefully remove Cardboard between the outer shade and the inner shade.
- Place the Neck of the Socket Assembly (L) into the Gap of the Shade (M) as shown. Pass the Bolts on the Shade (M) through the holes on the Socket Assembly (L) and secure with Lock Balls (K). Hand tighten until snug.

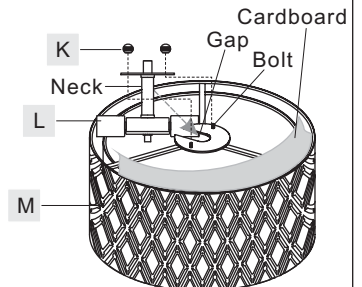


Figure 1A

#### STEP 2A - Install Lanyard, Ceiling Canopy, Rods and Socket Assembly together

- Thread Nipple (G) onto Swivel (E). Place Ceiling Canopy (B), Small Flat Washer (I), Lanyard (J) and Big Flat Washer (H) over Nipple (G) as shown, secure by threading Hex Nut (F) onto Nipple (G), tighten until snug.
- Determine Rods (C/D) to be assembled to Shade with Socket Assembly according to your hanging height.
- Pass the supply wires and ground wire through chosen rods (C/D) and Ceiling Canopy with Swivel. Thread Shade with Socket Assembly, chosen Rods (C/D) and Ceiling Canopy with Swivel together. Hand tighten until snug.

Suggested rods for Ceiling height :  
8' ceiling : use (2) 12" rods  
9' ceiling : use (2) 6" rods and (2) 12" rods

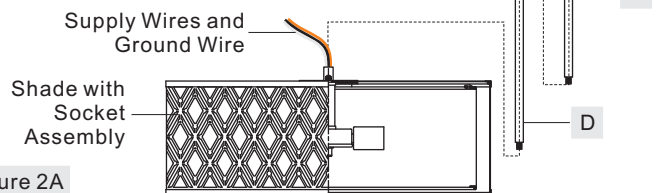


Figure 2A

Thank you for purchasing a Quozel product.  
Need assistance with parts or assembly? Call Quozel customer service at 1-800-645-3184  
or visit us on-line at [www. quozel. com](http://www. quozel. com)

### STEP 3A - Install Crossbar Assembly

- A. Pass the supply wires through the Crossbar Assembly (A). Attach the Crossbar Assembly (A) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.




Figure 3A Outlet Box Screws (not included) Supply Wires with Ground Wire

### STEP 4A - Test Fitting Ceiling Canopy to Crossbar Assembly

- A. Remove mounting balls from the Crossbar Assembly (A). Fit the Ceiling Canopy (B) to the Crossbar Assembly (A) and secure with mounting balls. Note: The Ceiling Canopy (B) should be snug against the ceiling and the mounting balls. If not, adjust the length of the nipple on the Crossbar Assembly (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws in or out of the crossbar until the correct length is achieved. Once the Ceiling Canopy (B) is secure, remove the mounting ball and Ceiling Canopy (B) and proceed to Step 5A.

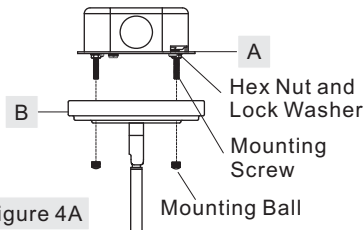


Figure 4A

### STEP 5A - Attach Lanyard

- A. The purpose of the lanyard is to provide the installer a means to support the fixture from the junction box while connecting the electrical wires. This enables the fixture to hang from the junction box and your hands are free to make the wire connections.
- B. Turn the Button Stop so it may be inserted into the Crossbar slot. Make sure the Button Stop is completely inside the Crossbar.




Figure 5A

Slowly release the fixture to make sure it is supported by the Button Stop. Proceed to the wiring steps in the next step. Once you are complete with the wiring there is nothing to do with Lanyard. The Lanyard will push into the junction box when the fixture is placed for final mounting.

### STEP 6A - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

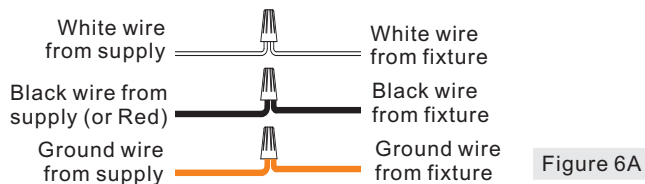


Figure 6A

### STEP 7A - Install Fixture Body

- A. Carefully tuck all wires into the outlet box and position the Ceiling Canopy (B) over the outlet box. Align the holes in the Ceiling Canopy (B) with the mounting screws, then attach the Ceiling Canopy (B) using the previously removed mounting balls. Hand tighten until snug.




Figure 7A

### STEP 8A - Install Diffuser and Bulb

- A. Thread the beaded end of Stem (O) onto the Coupling underside of the Socket Assembly. Place Diffuser (N), Rubber Washer (P) and Flat Washer (Q) over the end of Stem (O) and secure with Hex Nut (F). Tighten until snug.
- B. Thread Finial (R) onto the end of Stem (O) and hand tighten until snug.
- C. This fixture uses standard bulb with medium base. Maximum 100 watts. Insert bulb and screw snugly into place.


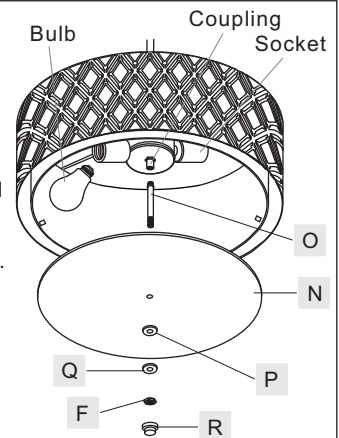


Figure 8A

**Your fixture is now assembled and ready to use. Enjoy!**

### Assembly Instructions for Semi-flush Light (Step 1B - Step 8B)

**Part B, Part C and Part D will not be used in the assembly of the Semi-Flush Light fixture. Please set aside these parts.**



### STEP 1B - Attach Socket Assembly to Shade

- A. Carefully remove Cardboard between the outer shade and the inner shade.
- B. Place the Neck of the Socket Assembly (L) into the Gap of the Shade (M) as shown. Pass the Bolts on the Shade (M) through the holes on the Socket Assembly (L) and secure with Lock Balls (K). Hand tighten until snug.

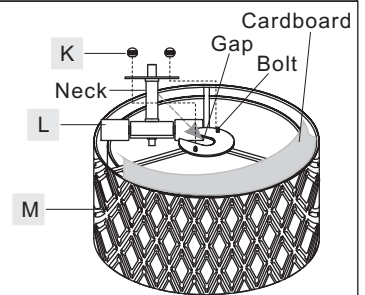


Figure 1B

### STEP 2B - Install Lanyard, Ceiling Canopy to Socket Assembly

- A. Pass supply wires with ground wire through Nipple (G), Ceiling Canopy (B), Small Flat Washer (I), Lanyard (J), Big Flat Washer (H) and Hex Nut (F). Thread Nipple (G) onto Socket Assembly. Place Ceiling Canopy (B), Small Flat Washer (I), Lanyard (J), Big Flat Washer (H) onto the Nipple (G). Secure by threading Hex Nut (F) onto the Nipple (G). Hand tighten until snug. Cut the wires leaving approximately 6" of wire extending from the Ceiling Canopy.
- B. Optional Swivel: Install the swivel to the Socket Assembly and then attach Nipple (G) and the Ceiling Canopy (B), Lanyard (J) to the Swivel using Hex Nut (F) as in step A.

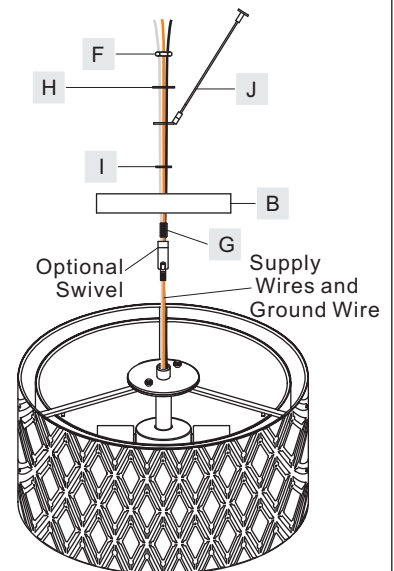


Figure 2B

**Thank you for purchasing a Quoizel product.**  
**Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184**  
**or visit us on-line at [www.quoise.com](http://www.quoise.com)**

### STEP 3B – Install Crossbar Assembly

- A. Pass the supply wires through Crossbar Assembly (A). Attach Crossbar Assembly (A) to Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.


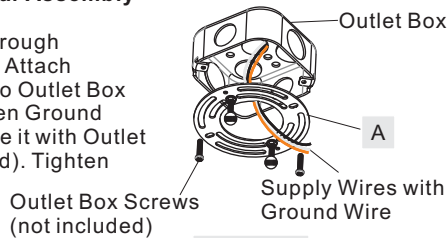


Figure 3B

### STEP 4B – Test Fitting Ceiling Canopy to Crossbar Assembly

- A. Remove mounting balls from Crossbar Assembly (A). Fit Ceiling Canopy (B) to Crossbar Assembly (A) and secure with mounting balls. Note: The Ceiling Canopy (B) should be snug against the ceiling and the mounting

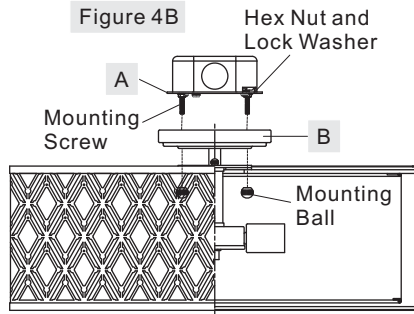


balls. If not, adjust the length of the nipple on the Crossbar Assembly (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws in or out of the crossbar until the correct length is achieved. Once the Ceiling Canopy (B) is secure, remove the mounting ball and Ceiling Canopy (B) and proceed to Step 5B.

### STEP 5B - Attach Lanyard

- A. The purpose of the lanyard is to provide the installer a means to support the fixture from the junction box while connecting the electrical wires. This enables the fixture to hang from the junction box and your hands are free to make the wire connections.  
B. Turn the Button Stop so it may be inserted into the Crossbar slot.

Make sure the Button Stop is completely inside the Crossbar. Slowly release the fixture to make sure it is supported by the Button Stop. Proceed to the wiring steps in the next step. Once you are complete with the wiring there is nothing to do with Lanyard. The Lanyard will push into the junction box when the fixture is placed for final mounting.

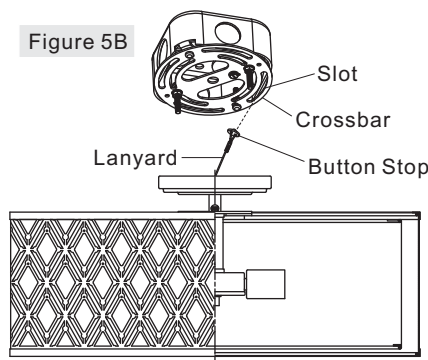

### STEP 6B - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

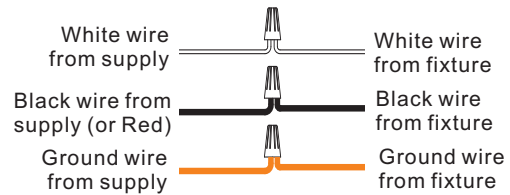


Figure 6B

### STEP 7B – Install Fixture Body

- A. Carefully tuck all wires into the outlet box and position Ceiling Canopy (B) over the outlet box. Align the holes in Ceiling Canopy (B) with the mounting screws, then attach Ceiling Canopy (B) using the previously removed mounting balls. Hand tighten until snug.

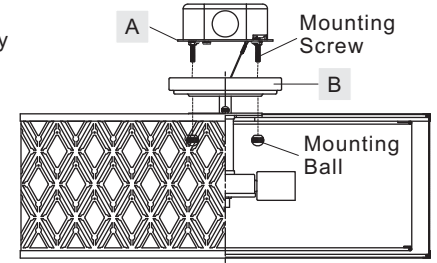


Figure 7B

### STEP 8A – Install Diffuser and Bulb

- A. Thread the beaded end of Stem (O) onto the Coupling underside of the Socket Assembly. Place Diffuser (N), Rubber Washer (P) and Flat Washer (Q) over the end of Stem (O) and secure with Hex Nut (F). Tighten until snug.  
B. Thread Finial (R) onto the end of Stem (O) and hand tighten until snug.  
C. This fixture uses standard bulb with medium base. Maximum 100 watts. Insert bulb and screw snugly into place.

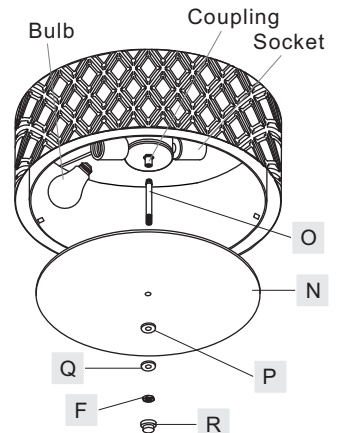


Figure 8B

**Your fixture is now assembled and ready to use. Enjoy!**




Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184  
or visit us on-line at [www.quoise.com](http://www.quoise.com)

MCBQ2822K


FINISH: MYSTIC BLACK

**PENDANT LIGHT**

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

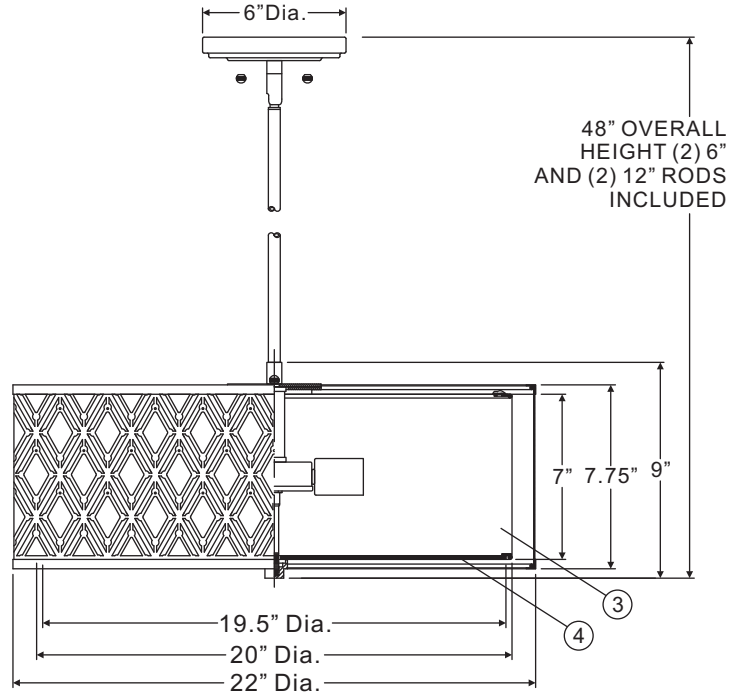

**SEMI-FLUSH LIGHT**

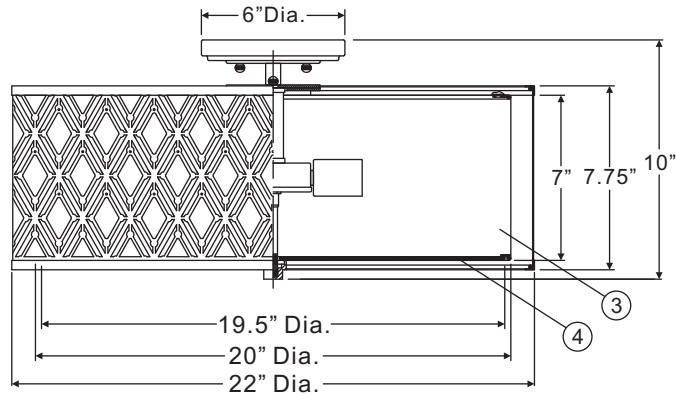

(4) 100W Medium Base Bulbs (Not Supplied)

NO.	PART NUMBER	REPLACEMENT PART	QTY.
1	9006EXK	6"L ROD	2
2	9012EXK	12"L ROD	2
3	S12636MC	MICA SHADE	1
4	G12736DI	DIFFUSER	1

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)