

EMPV-36EC83H

PRODUCT

size

Item Size (inches)


36" x 21" x 3 11/25"




FEATURES & BENEFITS

01. Built-in type, saves your countertop space.
02. Responsive glide touch to operate, very easy to use.
03. The child lock feature prevents children from operating.
04. Ceramic panel material which is the easiest material to clean.
05. Residual temperature reminder function to prevent skin burns.
06. Three quick setting functions include melting, warming, and simmering.
07. Two bridge to combine four temperature zones so as to provide more temperature options.
08. With good heat dissipation function supported by 2 heat dissipation vents on the left and back.
09. Auto switch off 2 hours after when there is no operation, so as to eliminate the fire accident.
10. 18 powers for 18 types of temperature settings to control your cooking temperature more accurately.

Product size

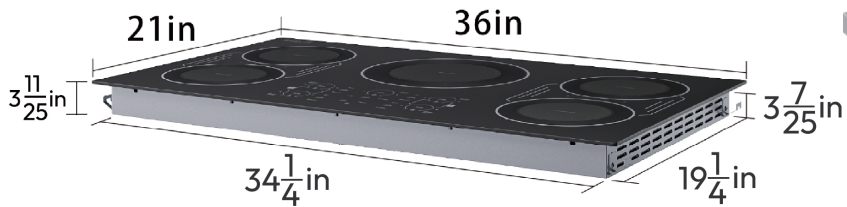

Installation size

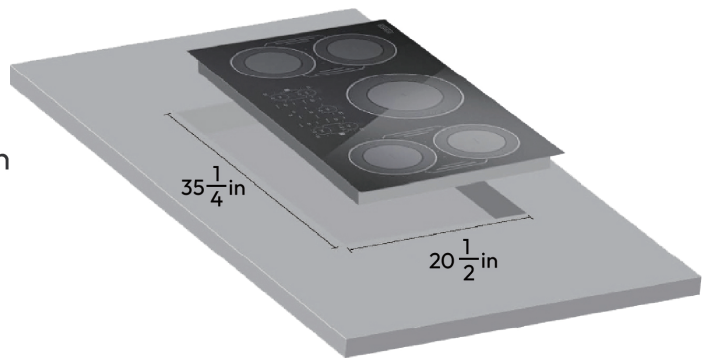

Model No.	EMPV-36EC83H		
Product Name	36inch		
Type	Built-in		
Frame	Metal		
Control mode	Slider Touch control		
Voltage/frequency	208V/240V~60Hz, 47.5A		
Total power	208V/9800W, 240V/11400W		
Power(W)	Left front: 1.85kW/2.7kW Left rear: 1.85kW/2.7kW Left bridge 3.7kW	Right front: 1.85kW/2.7kW Right rear: 1.85kW/2.7kW Right bridge 3.7kW	Center: 3.0kW/4.0kW
Power sharing	Left 3700W	Center 4000W	Right 3700W
Features	Automatic RapidHeat		
Function	Power/Lock/Pause/Bridge		
Preset features	Melt(113°F)/Warm(158°F)/Simmer(195°F)		
Boost up to	10 mins		
Heating area size	Center: about 10"(25cm) Left front/rear: about 7"(18cm) Right front/rear: about 7"(18cm)		
Half bridge circuit Consecutive low power output	Center Minimum 500W		
Consecutive low power cooking burner	Left front: 500W Left Rear: 500W	Right front: 500W Right Rear: 500W	

intermitent heating in short time at low power level bring great cooking experience,
consecutive low output power can avoid water spilling over

Bridge for larger cookware or griddles	Yes, two bridge
Power stage setting	17 + Power Boost
Coils	Copper coil
Timer(min)	9H59M
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Product Size(mm) (L*W*H)	36" x 21" x 3 11/25"
Built-in Size(mm) (L*W*H)	Min: 34 7/8" x 19 7/8" Max: 35 1/4" x 20 1/2"
Package standard	ISTA-3A/6A
Cable length(M)	1.0
Certificate standard	cTUVus/FCC
Carton	Brown box