

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers


HARDWARE INCLUDED



Fixture



Shade



Small Ball Nuts



Threaded Pipe



Cover



Rubber Ring




Big Ball Nut



Wire Nuts

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


EXPLODED PARTS

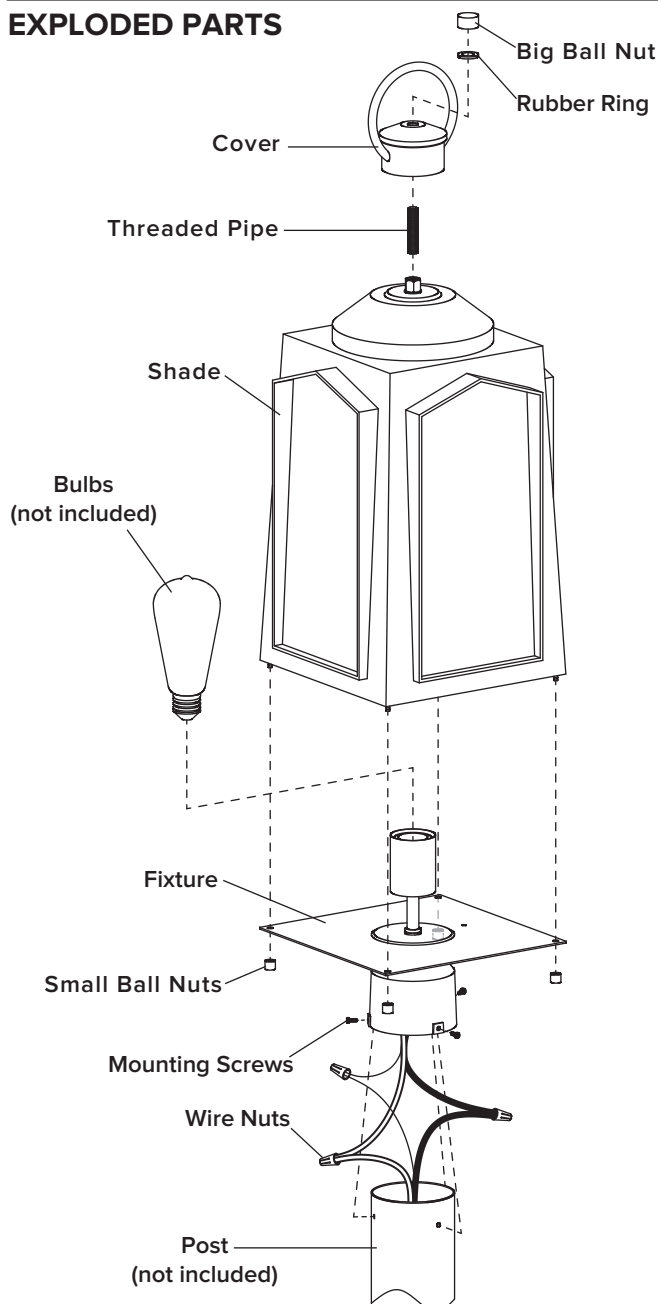

INSTALLATION



STEP 1

1. Disassemble the **shade** on the **fixture** by unscrewing **small ball nuts**.
2. Unscrew the **mounting screws** from the **fixture**.

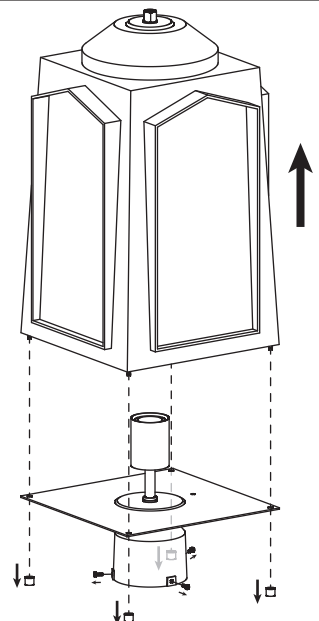

STEP 2

Make the electrical connection from the **post** (not included) to the **fixture**. Connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

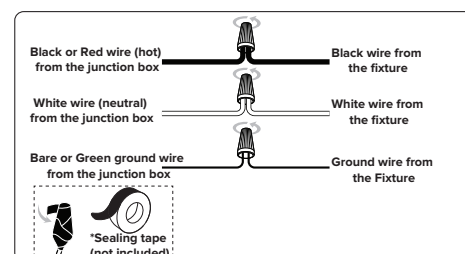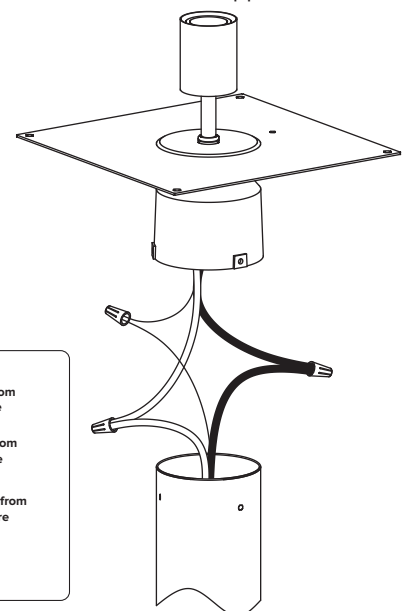


***Accommodates a 3 in. post (not included)**

ASSEMBLY INSTRUCTIONS (INSTALLATION)

STEP 3


Attach the **fixture** to the **post** (not included) through screw holes as shown, and secure it with **mounting screws**

*Accommodates a 3 in. post (not included)

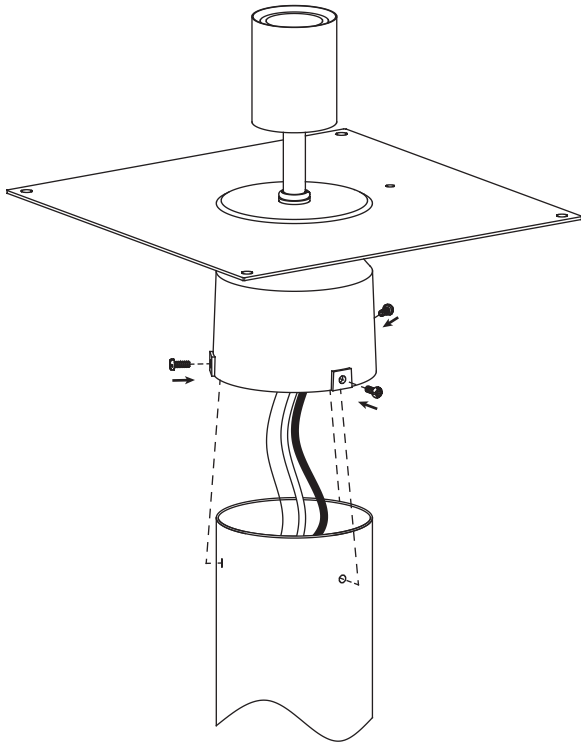


STEP 4

Install bulbs (not included).

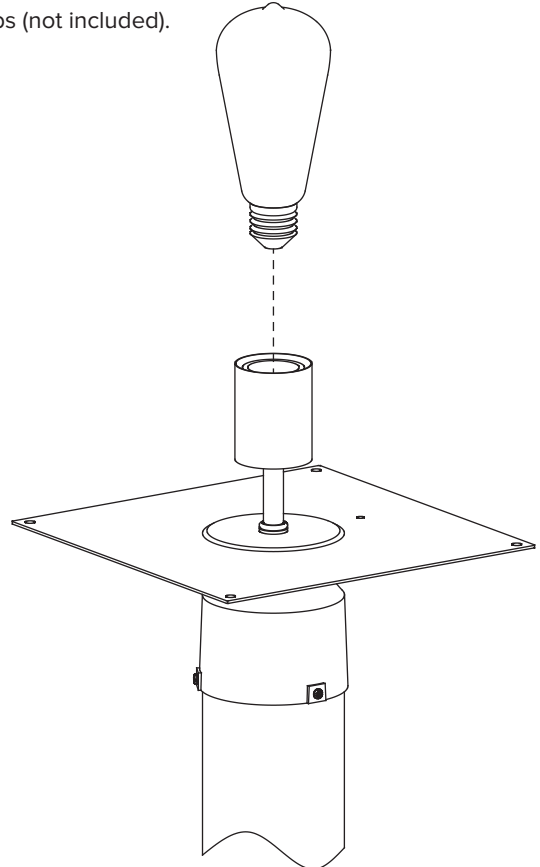

STEP 5

1. Place the **shade** onto the **fixture** and secure with **Small Ball Nuts**.

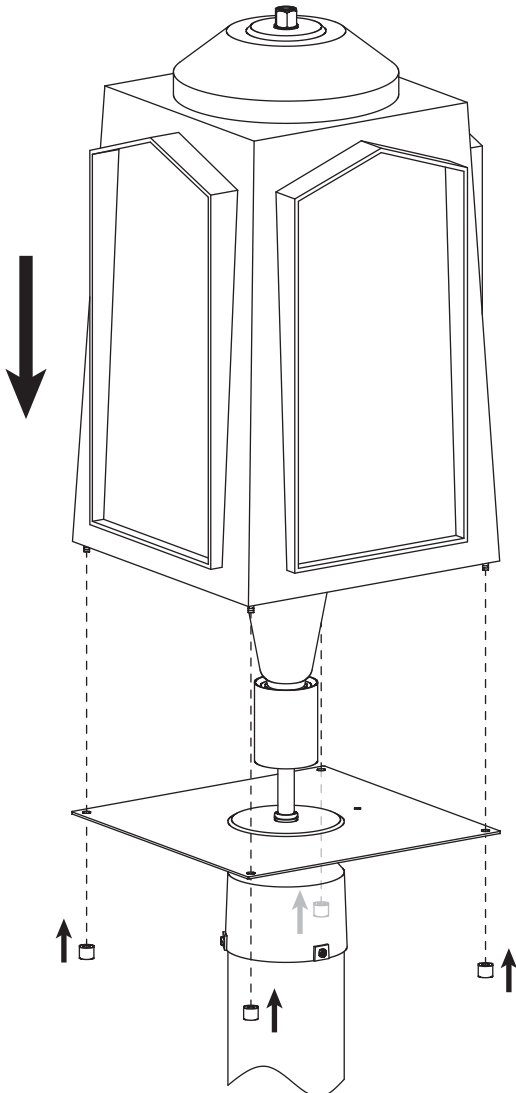

STEP 6

1. Screw the **threaded pipe** into the **fixture**.
2. Place the **cover** onto the **threaded pipe**, then secure with **rubber ring** and **big ball nut**.

