


**PYRAIMD™**

**LP8406\*\***  
**52" Ceiling Fan**

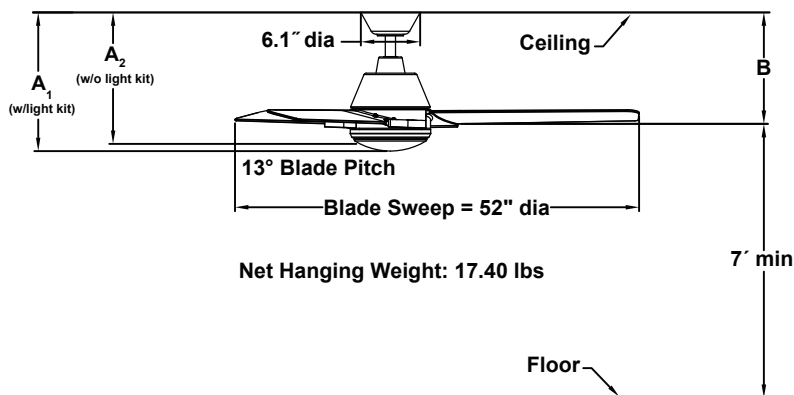

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

153 x 20 AC motor is designed for optimal performance with this fan.

**BLADES:**

A set of three 23" composite blades is included.

**CONTROL OPTIONS:**

TR500S hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC1WH, WC2WH, WR500WH, WR501WH and CWRL4 wall controls, BTR9 and CRL4WH hand held remote controls and BTR9 receiver unit and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

One 18-watt LED included.

**DOWNROD OPTIONS:**

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry and damp locations.

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/4.5" downrod	14.52"	13.15"	12.18"
Fan w/12" downrod	22.02"	20.65"	19.68"
Fan w/18" downrod	28.02"	26.65"	25.68"
Fan w/24" downrod	34.02"	32.65"	31.68"
Fan w/36" downrod	46.02"	44.65"	43.68"
Fan w/48" downrod	58.02"	56.65"	55.68"
Fan w/60" downrod	70.02"	68.65"	67.68"
Fan w/72" downrod	82.02"	80.65"	79.68"

**Available Finishes**

LAZ	Aged Bronze with Dark Walnut Blade and Opal Frosted Lampshade/Steel Cap
LBN	Brushed Nickel with Black Blade and Opal Frosted Lampshade/Steel Cap
LGR	Matte Greige with Weathered Wood and Opal Frosted Lampshade/Steel Cap

**Airflow / Energy Efficiency Info (120V)**

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	187	5217	92	0.47	57
Med	131	3638	119	0.35	31
Low	77	2166	171	0.22	13

**Energy Guide FTC**

Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
38	4165	11	110

**Light Bulb Information (120V)**

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%