



One-piece compact elongated toilet with concealed trapway, 1.28 gpf

K-3940

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Concealed trapway and Clean Caps® low-profile bolt caps facilitate easier cleaning and enhance design
- Left-hand Polished Chrome trip lever
- Coordinates with other products in the Kathryn collection
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Eligible for consumer rebates in some municipalities
- Quiet-Close[™] compact elongated lid and seat prevents slamming
- Quick-Release[™] functionality allows seat to be removed easily from toilet for convenient cleaning
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural powerful reducing cascade of water to increase the power and effectiveness of the flush

 CSA B651

Installation

- Standard 12" (305 mm) rough-in
- Supply line sold separately

Recommended Products/Accessories

K-4108 PureWash® E750 Elongated bidet toilet seat with remote control K-9131 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-23726 Drain treatment

Included Components

K-4733 Glenbury™ Quiet-Close™ elongated toilet seat





Codes/Standards

ASME A112.19.2/CSA B45.1 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|--------------|
| | 0 | White |
| | 96 | Biscuit |
| | 7 | Black Black™ |






Kathryn®

One-piece compact elongated toilet with concealed trapway, 1.28 gpf

K-3940

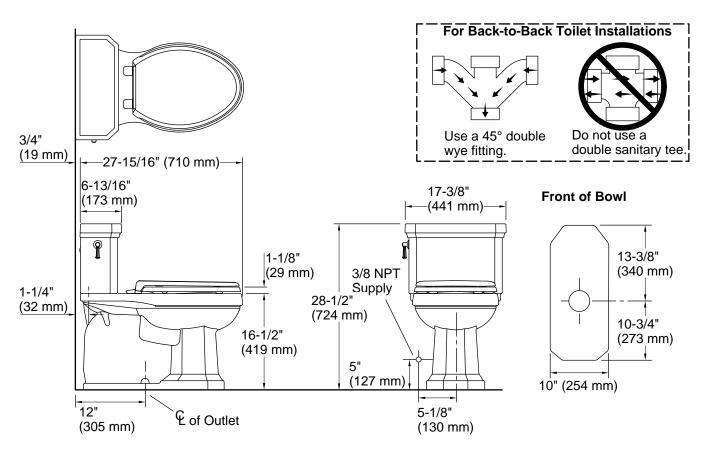

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor Bowl shape: Elongated AquaPiston Flush type: 2-1/8" (54 mm) Trap passageway:

10-1/2" x 7-1/2" (267 mm x 191 mm) Water surface size:

Rim to water 5-5/8" (143 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa) Min flowing 15 psi (103.4 kPa)

pressure:

Min flow rate: 1 gpm (3.8 lpm)

Notes


Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada 12-9-2024 23:32 - US/CA

