

ELKAY[®]

SPECIFICATIONS

The Mystic[®] and Asana[®] Undermount Single Bowl Sinks Models ELUH9, ELUH12, ELUH16, ELUH12FB, ELUH16FB; ELUH12LV and ELUH16LV Lavatory with Overflows

GENERAL

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel. Undermount.

DESIGN FEATURES

Bowl Depths: See chart on next page.

Finish: Exposed surfaces are hand polished to a Lustrous Highlighted Satin finish.

Underside: Underside of sink is fully protected by heavy duty Sound Guard[®] undercoating to reduce condensation and dampen sound.

Models ELUH12LV and ELUH16LV lavatory sinks include overflow assembly.

OTHER

Drain Opening: 1-1/2" (38mm) (ELUH12LV and ELUH16LV), 2" (51mm) (ELUH9, ELUH12 and ELUH16), 3-1/2" (89mm) (ELUH12FB and ELUH16FB).

Note: All Elkay undermount sinks are designed to affix to the underside of any solid surface countertop.

Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO[®] as meeting the applicable requirements of the Uniform Plumbing Code[®], International Plumbing Code[®], and National Plumbing Code of Canada.



All sinks 6" or less in depth are compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

OPTIONAL ACCESSORIES


Bottom Grid: LKWRBG12SS (ELUH12FB); LKWRBG16SS (ELUH16FB)

Drain: LK174, LKAD174, LK175 (ELUH12LV, ELUH16LV); LK36 (ELUH9, ELUH12, ELUH16); LK99 (ELUH12FB, ELUH16FB)


Rinsing Basket: LKWRB12SS (ELUH12FB)

Utensil Caddy for Rinsing Basket: LKWUCSS


Mounting Clip: LKUCLIP8



Model ELUH9
 Model ELUH12
 Model ELUH16



Model ELUH12LV
 Model ELUH16LV



Model ELUH12FB
 Model ELUH16FB



SINK PACKAGE(S)

MODEL	SINK	BOTTOM GRID	QTY	DRAIN	QTY
ELUH12FBDBG	ELUH12FB	LKWRBG12SS	1	LK99	1
ELUH16FBDBG	ELUH16FB	LKWRBG16SS	1	LK99	1

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

ELKAY[®]

SPECIFICATIONS


The Mystic[®] and Asana[®] Undermount Single Bowl Sinks Models ELUH9, ELUH12, ELUH16, ELUH12FB, ELUH16FB; ELUH12LV and ELUH16LV Lavatory with Overflows

SINK DIMENSIONS*


Model Number	Outside Diameter	Inside Diameter	Depth	Drain Opening	Cutout in Countertop	Minimum Cabinet Size	Includes Overflow Assembly
	A	B	C				
ELUH9	11 ³ / ₈ (289mm)	9 (229mm)	4 ³ / ₄ (121mm)	2 (51mm)	See Template*	15 (381mm)	No
ELUH12	14 ³ / ₈ (365mm)	12 (305mm)	6 (152mm)	2 (51mm)		18 (457mm)	No
ELUH12FB	14 ³ / ₈ (365mm)	12 (305mm)	6 (152mm)	3 ¹ / ₂ (89mm)		18 (457mm)	No
ELUH12LV	14 ³ / ₈ (365mm)	12 (305mm)	6 (152mm)	1 ¹ / ₂ (38mm)		18 (457mm)	Yes
ELUH16	18 ³ / ₈ (467mm)	16 (406mm)	8 (203mm)	2 (51mm)		24 (610mm)	No
ELUH16FB	18 ³ / ₈ (467mm)	16 (406mm)	8 (203mm)	3 ¹ / ₂ (89mm)		24 (610mm)	No
ELUH16LV	18 ³ / ₈ (467mm)	16 (406mm)	8 (203mm)	1 ¹ / ₂ (38mm)		24 (610mm)	Yes

*Length is left to right. Width is front to back.

**Template #1000001397(ELUH9), #1000000596(ELUH12) or #1000001418(ELUH16) is packed with every sink.

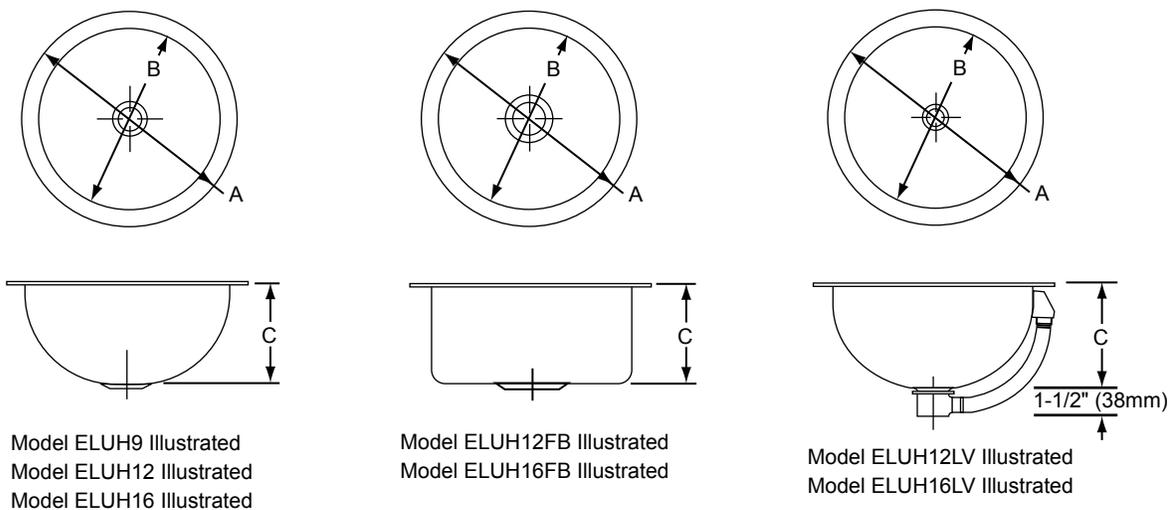

Installation Profile

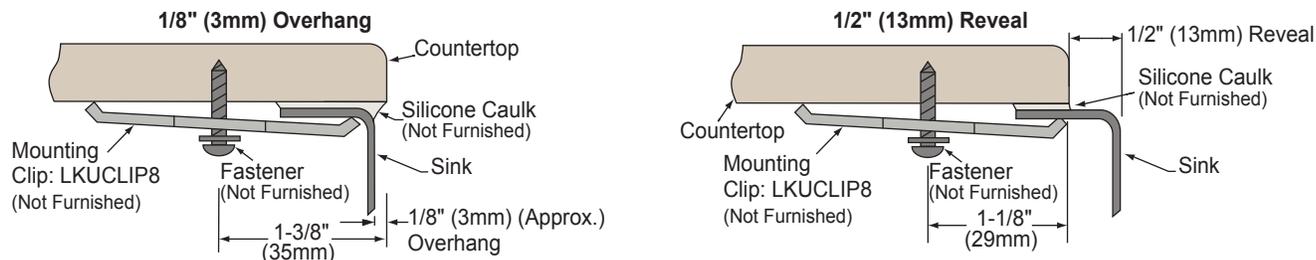

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.