



Welcome to the Kwikset family!

This guide will get you ready to install your new low profile dead bolt.

If you have any issues, please visit our support center: kwikset.com/support or call us at 1-800-327-5625.



Installation and Reference Guide

This manual can be used to install a variety of dead bolt. Please determine your function type prior to installation.



Entry
(Keyed)

Recommended Tools




wood block



*Tools will depend on install type

[Door Prep:](#) If you need help in preparing your door
[Drilling template:](#) If you need help in drilling your door

1 Extend latch bolt




Make sure the curve is on the bottom of the latch.

Use a screwdriver to extend the latch bolt.




2 Adjust backset of the latch (if needed)

- A Hold the latch in front of the door hole, with the latch case flush against the door edge.




- B If the D-shaped hole is centered in the door hole, no adjustment is required. Proceed to step 3.



If the D-shaped hole is NOT centered, adjust latch. See "Latch Adjustment" (step C).

D-shaped hole



- C Latch Adjustment (only if needed)




3 Install latch (chiseled door)


A




- B Install backplate.

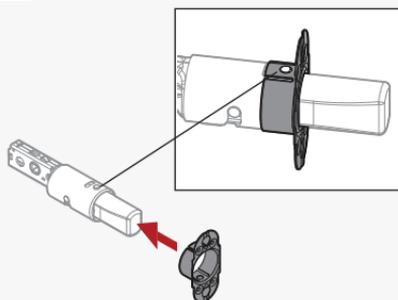

C

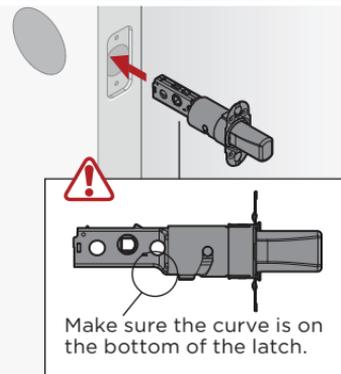

D

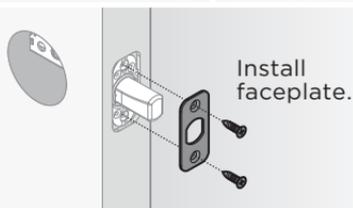


3 Install latch (non-chiseled door)


A




B Use a screwdriver to retract the latch bolt.

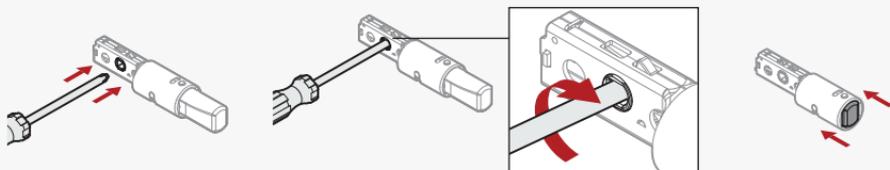


C Install drive-in collar.



D

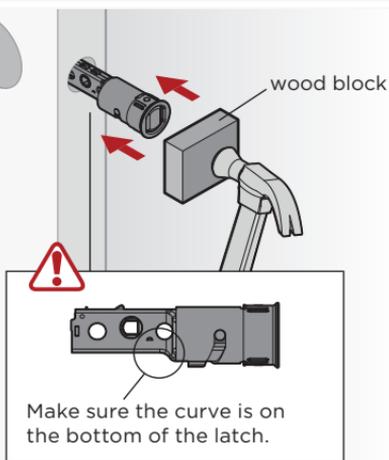


E

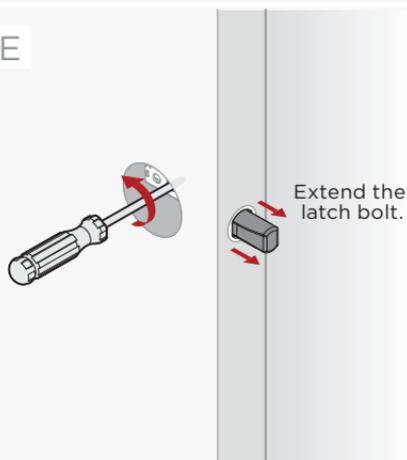


4

Determine mounting screws




Measure the thickness of your door to determine the required mounting screws for step 6.



or



or

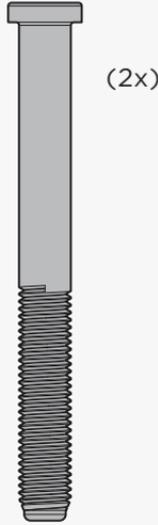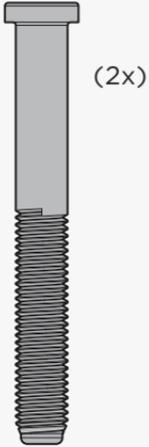


Call Kwikset to order a service kit for 2-1/4" (57 mm) thick doors. Use the screws provided in the kit.


5

Install deadbolt interior

A Make sure turnpiece is vertical.




B Mounting plate should be pre-installed on interior. If removed, re-install.



C

interior



torque blade


latch cam

Make sure latch bolt is fully extended.

6


Install deadbolt exterior

A

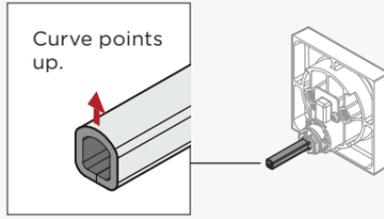

B


Support deadbolt interior while installing exterior.

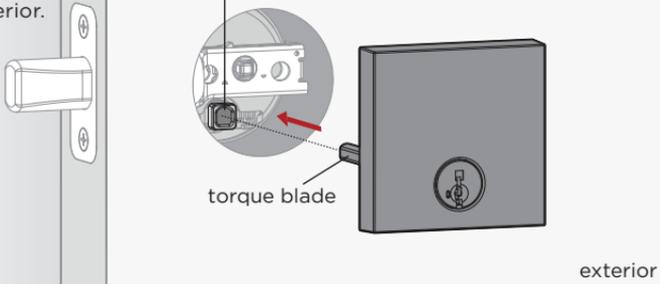

C


Keep parallel.

Use screws from step 4.




Troubleshooting

If the screws are difficult to tighten, make sure the latch is installed correctly.




7

Install strike on door frame

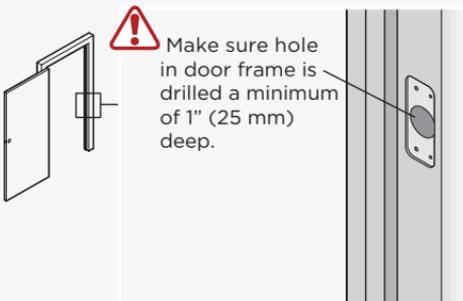

Longer screws install closest to jamb.



Note: The longer screws, 3" (76 mm) must be used to maintain highest security.

SmartKey Rekeying Instructions



SMARTKEY
SECURITY™

**ONE KEY
FOR ALL
YOUR LOCKS™**



The lock you can re-key yourself in seconds for any situation, including:



Recently Moved



Lost Keys



Multiple Doors



Carry Less Keys

WITH PROTECTION AGAINST
ADVANCED BREAK-IN TECHNIQUES

For rekeying instructions, you can also visit:

<https://www.kwikset.com/support/answers/how-to-re-key-your-smartkey-security-locks>

If you have any issues, please visit our support center: [kwikset.com/support](https://www.kwikset.com/support) or call us at 1-800-327-5625.



WARNING: This Manufacturer advises that no lock can provide complete security by itself. This lock may be defeated by forcible or technical means, or evaded by entry elsewhere on the property. No lock can substitute for caution, awareness of your environment, and common sense. Builder's hardware is available in multiple performance grades to suit the application. In order to enhance security and reduce risk, you should consult a qualified locksmith or other security professional.