


SPECIFICATIONS

Height	23.875 in.
Width	23.875 in.
Area	4 sq. ft. (nominal)
Features	Recess 0.50 in. from tile face
Collection	Signature
Thickness	0.030 in.
Weight	12.8 oz. (0.20 lb. per sq. ft.)
Material	Rigid vinyl
Color	White
Finish	Satin
Cut-out	6 in. cut-out available
Perforation	Available

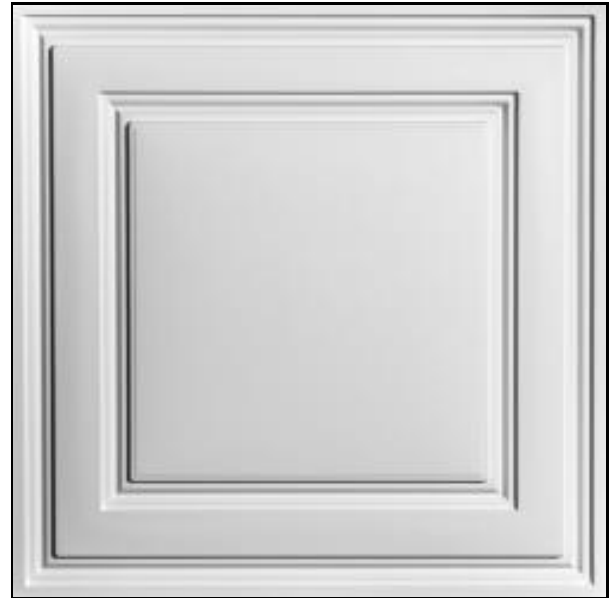

INSTALLATION

Installation Type	Standard drop (15/16 to 1 in.) Slimline drop (9/16 in.)
Borders	Yes, this style may be trimmed for use along borders
Direct Mount Grid	Yes, this product may be used with direct mount grid
Temp. Warning	Not recommended for installation where ceiling temperatures exceed 120°F

CERTIFICATIONS, LISTINGS, APPROVALS

Drop-out Installation	Yes, approved for installation <u>beneath</u> fire suppression sprinklers IAPMO Uniform ES Listing Report 5021 IAPMO Uniform ES Evaluation Report 0310 CertMark Evaluation Report CMI-ER31001
------------------------------	--



PRODUCT DATA SHEET

Oxford White Ceiling Tiles

V3-OX-22WTO

Fire Ratings	Class A Euroclass Rating B-s1-d0 Flame Class V-0
Code Compliance	2015, 2012, 2009, and 2006 IBC
Indoor Air Quality	Greenguard Gold Certified; low-VOC; dust and fiber free
Food Preparation	FDA and USDA Compliant
Moisture	FEMA Class 4 Material; waterproof; washable
Sustainability	100% recyclable

PERFORMANCE

Noise Reduction	NRC 0.15 NRC 0.30 with Soniguard
Sound Transmission	STC 15 STC 15 with AcoustoTherm STC 18 with Soniguard
Ceiling Attenuation	CAC 21 CAC 26 with Soniguard
Light Reflectance	90.44%
Thermal Insulation	R-6.0 with Soniguard