

The power switch must be turned off before installation to prevent electric shock!
When installing, the LN line of the product must correspond to the LN line of the mains power supply, otherwise, the abnormal light emission will be caused.



FAN LAMP

user's manual

please take the actual product as the standard

Why us?

1. We use the world's leading technology. Our fans are made with a high efficient, quiet and durable energy saving motor. and ensure our motors can be guaranteed for 5 years.
2. With the personalized and unique structural design, our fans possess the classy and fashionable appearance. The fans are designed with imported zinc alloy housings and plywood blade to ensure the high quality of the product. Shine and cool elegantly with LED's innovative fans.

Warning

1. The input wattage for this fan should be 110V/60Hz.
2. Electrical installation should be performed by a qualified licensed electrician.
3. To reduce the risk of electric shock, ensure electricity has been turned off before assembling or disassembling. The assembling wire order must be ground wire, hot (supply) wire/neutral wire, and the disassembling wire order should be neutral wire/ hot (supply) wire, ground wire.
4. Make sure all assembled screws were tight during the assembling.
5. To reduce the risk of injury, do not touch the blade when the fan is running.

Tools required for installation



Reading before installation

1. Fan will not start


- (1). Check the wire connections to the fan, ensure they are all correct.
- (2). Check and ensure the input wattage is correct to be 110V/60Hz.

2. Than fan sounds noisy


- (1). Make sure all assembled screws are tight.
- (2). Make sure wire nut connections are not rubbing against each other or the interior wall of the switch housing.

Installation steps and instructions


1. Components list

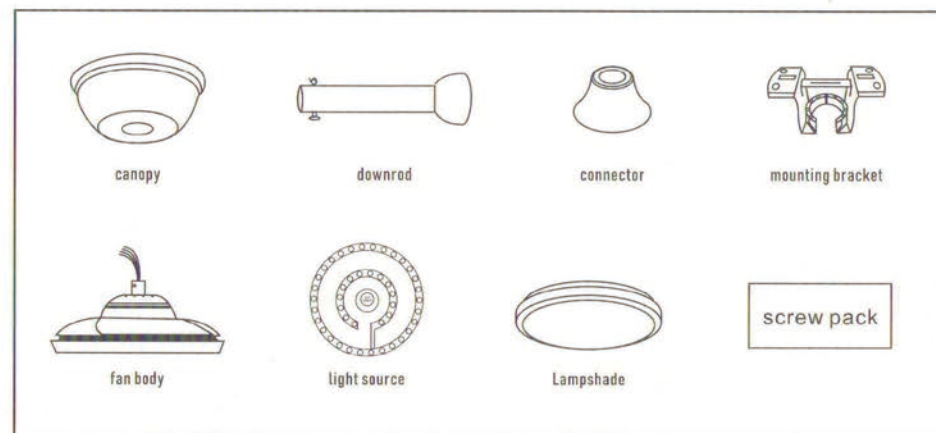

2. Mounting bracket installation

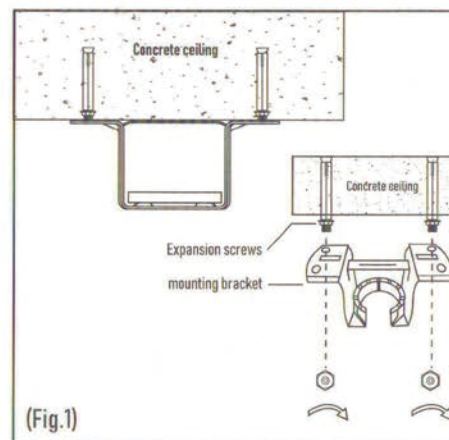

- (1). Concrete ceiling: Drill two holes with an appropriate depth by a drilling bit with dia. At 8mm, and insert two pieces expansion screws in the holes, then fix the hanger bracket into the expanding screws with the wood screws and tighten it by the nuts of the expansion screws (Fig.1)

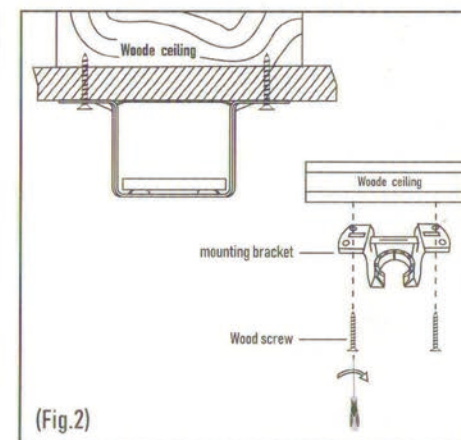

- (2). Wood ceiling: Fix the mounting bracket to the wood ceiling with (thickness at 10cm at east) by 4 wood screws. (Fig.2)



Note: In order to ensure reliable fixation, please use the corresponding fixation according to the above instructions when installing on the ceiling of different materials screw.

If the wooden ceiling is used as the installation surface, please ensure that the thickness of the board at the installation position is more than 10 mm and the bearing capacity is more than 30kg. (no obvious deformation by hand)