


Installation sequence

1

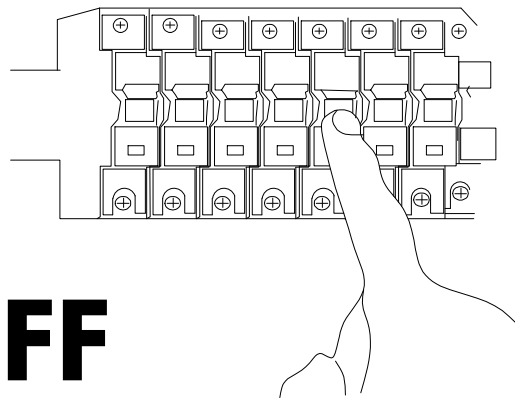


OFF

STEP1

Turn off the power.

2

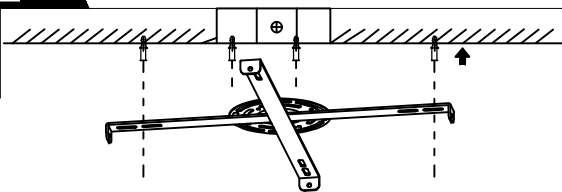


STEP2



Secure the plastic expansion anchors into the wall according to the hole spacing of the mounting plate, flush with the wall surface.

3

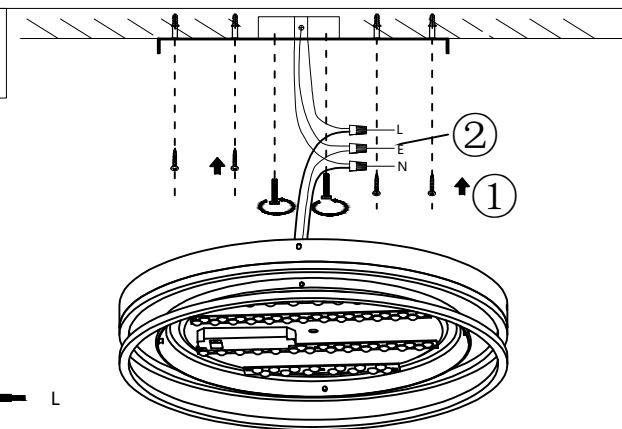


black L
white N
Earth E

STEP3




1. Secure the mounting plate to the junction box with screws, then fasten both sides of the mounting plate with self-tapping screws.
2. Connect the fixture wires to the reserved power supply wires using wire connectors. Make sure to match the live, neutral, and ground wires correctly.

4

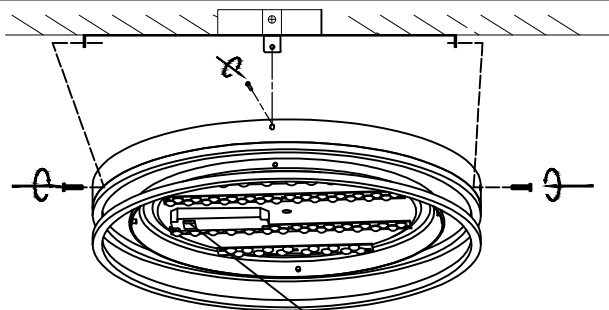

Can be used to change color temperature


- 1 3000K
- 2 3500K
- 3 4000K
- 4 5000K
- 5 6000K



STEP4


1. Fasten the light canopy to the mounting plate with screws.
2. Use the switch on the driver to select the color temperature (make sure the power is off before adjusting).

5

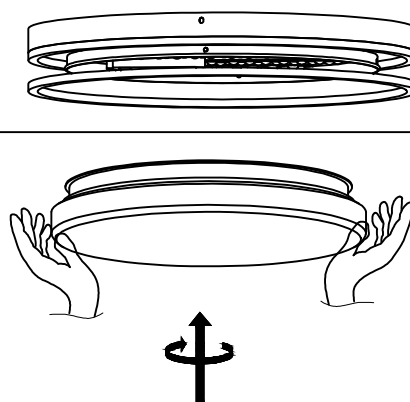

STEP5

Align the lampshade slot with the base nail and insert it, then use both hands to rotate the lampshade and base clockwise to secure them.



Before installation, please check whether the accessories are complete. If you have any problem, please contact our customer service in time.

Note:

1. Voltage: 120V-60Hz
2. Bulb Type: LED
3. Before installation, please cut off the power supply to prevent electric shock.
4. Please be sure the installation step according to the company's instructions.