



Installation (please cut off the power for security)

1. Open the package and take out the fan light and accessories, then place them on a clean flat place.
2. Assemble the wires as below procedure:


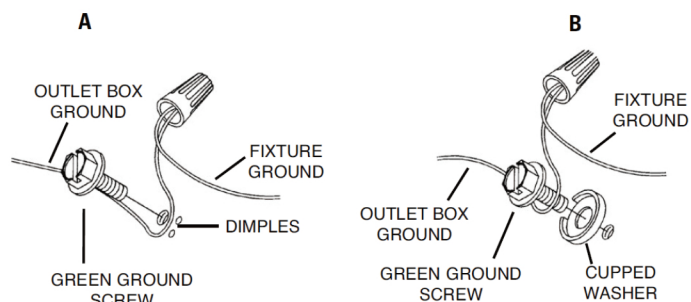


| Connect Black or Red Supply Wire to:                    | Connect White Supply Wire to:                           |
|---------------------------------------------------------|---------------------------------------------------------|
| Black                                                   | White                                                   |
| *Parallel cord (round & smooth)                         | *Parallel cord (square & ridged)                        |
| Clear, Brown, Gold or Black without tracer              | Clear, Brown, Gold or Black with tracer                 |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



3. Fix the fan light to wall by using the screws
4. Check everything installed correctly, then you can turn on the fan light.

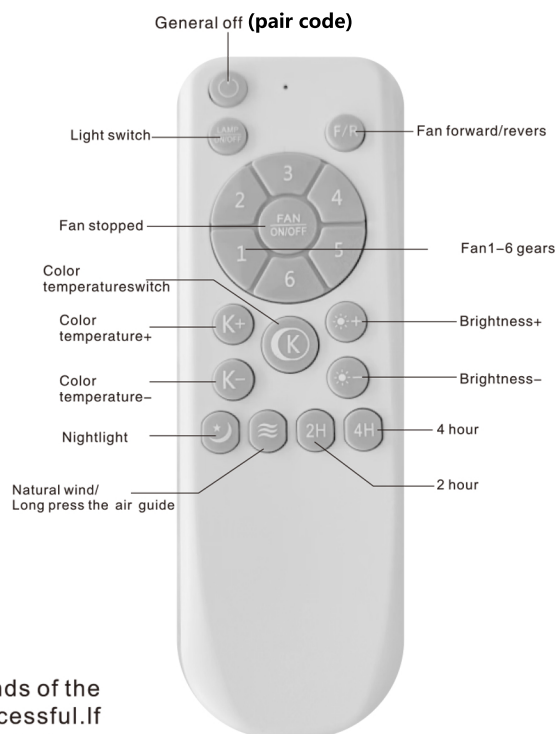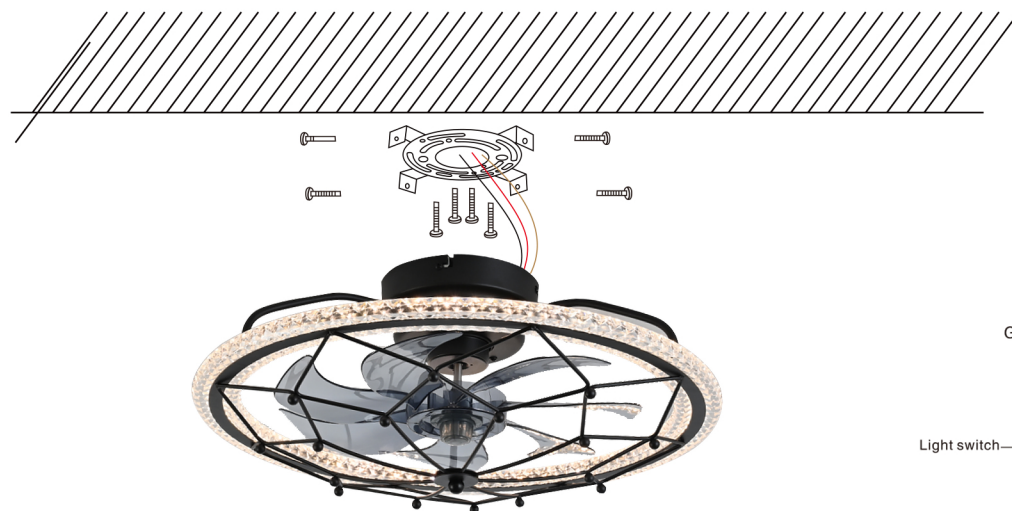

### Remote control matching code:

Turn on the power and Press and hold the light pairing key within 5 seconds of the light on, When you hear a beep or a light flashes, the code match is successful. If you need to match the code a second time, you need to wait 30 seconds before turning on the power and repeat the above operation.

#### CAUTION:

The electronic switch is not an isolated product and needs to be operated by professional personnel during installation

The electronic switch is triggered by the remote control, and the wireless frequency of the remote control transmitter is

**2.4GHz.**



M/P APP