


5207-S00 (Shallow)

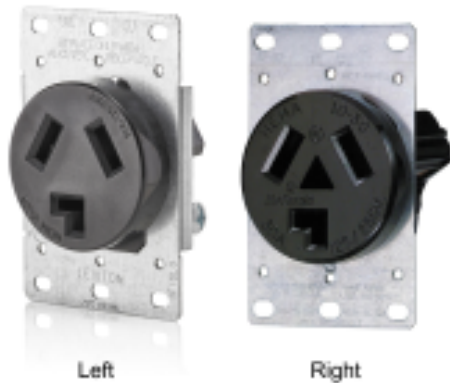

Color:  Black

UPC Code: 07847769532

Country Of Origin: Mexico

NEMA:
10-30R



30 Amp, 125/250 Volt, NEMA 10-30R, 3P, 3W, Flush Mtg Receptacle, Straight Blade, Industrial Grade, Non-grounding, AL-CU, Side Wired, Steel Strap - Black

WARNING:

Do not use with single-gang wallboxes, single-gang mud rings or single-gang box extenders.

Built of durable thermoplastic, Leviton Power Receptacles — come equipped with heavy-gauge, double-wire copper alloy contacts. To ensure correct and speedy wiring, terminals have ID markings. Flush mount receptacles fit Leviton's wide range of 2.15"-diameter wallplates and mounting hardware is included.

Please confirm device face before continuing. If you have the device on the left, stay on this page. If you have the device on the right, please visit: [5207-S00 \(Deep\)](#)

Technical Information

AC Horsepower Ratings

At Rated Voltage: 2 HP

Electrical Specifications

Amperage: 30 A

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 2000V per UL498

Grounding: Non-Grounding

Pole: 3

Temperature Rise: Max 30C after 50 cycles OL at 150 percent rated current

Voltage: 125/250 VAC

Wire: 3

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Body Material: Thermoplastic

Color: Black

Face Material: Thermoplastic

Line Contacts: Brass Double-Wipe

Strap Material: Galvanized Steel

Mechanical Specifications

Product ID: Ratings are permanently marked on device

Terminal Accom.: Up to 4 AWG

Terminal ID: X=Hot Y=Hot GR=Ground

Product Features

Color: Black

NEMA: 10-30R

Amperage: 30 A

Voltage: 125/250 VAC

Standards and Certifications

ANSI: C73

CSA: 22.2 No 42, C22.2 No.14, C22.2 No.65

File: E13399


NEMA: WD-6

NOM: NOM - ANCE

UL: UL 498, UL 486E

Warranty: 10 Year Limited

Wiring Diagram

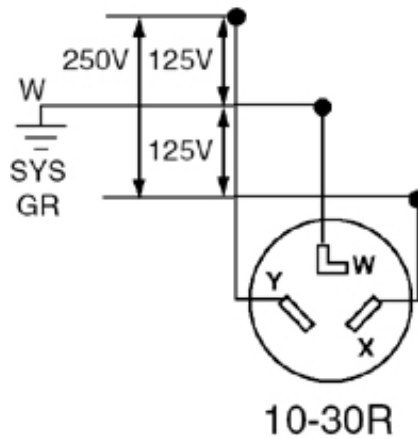

SPECIFICATION SUBMITTAL

| | | |
|----------------------|----------------------|----------------------|
| JOB NAME: | CATALOG NUMBERS: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| JOB NUMBER: | <input type="text"/> | <input type="text"/> |

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

